


### 技术参数 ( SPECIFICATIONS )

- 适应基板厚度 ( Applicable PC Board thickness ) : 0.8~1.2 mm
- 温度范围 ( Temperature range ) : -25℃~85℃
- 额定电压 ( Voltage rating ) : 125V AC/DC
- 额定电流 ( Current rating ) : 1A
- 绝缘电阻 ( Insulation resistance ) :  $\geq 100M\Omega$
- 耐压 ( Withstand voltage ) : 250V AC/minute


### 阳连接器 HEADER

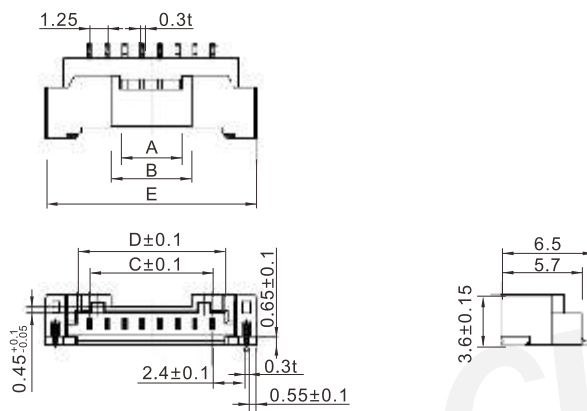

线数 Poles	型号Type	尺寸Dimensions ( mm )				
		A	B	C	D	E
6	1102-66206	3.5	5.5	6.25	8.00	12.45
10	1102-66210	4.3	8.2	11.25	13.00	17.45
14	1102-66214	7.2	13.20	16.25	18.00	22.45

材质·表面处理 Material and Finish LCP UL94V-0  
磷青铜 镀锡 Phos·bronze Tin·Plated

### 安装尺寸 MOUNTING MEASUREMENT



RECOMMENDED P.C. BOARD  
PATTERN DIMENSION(REF.)

COMPONENT SIDE