





技术参数 (SPECIFICATIONS)

适用FPC软板 (Useable FPC Board range) : Thickness=0.12mm
适应基板厚度 (Applicable PC Board thickness) : 0.8~1.2 mm
温度范围 (Temperature range) : -40℃~85℃
额定电压 (Voltage rating) : 50V AC/DC
额定电流 (Current rating) : 0.5A
绝缘电阻 (Insulation resistance) : ≥100MΩ
耐压 (Withstand voltage) : 250V AC/minute


阳连接器 HEADER

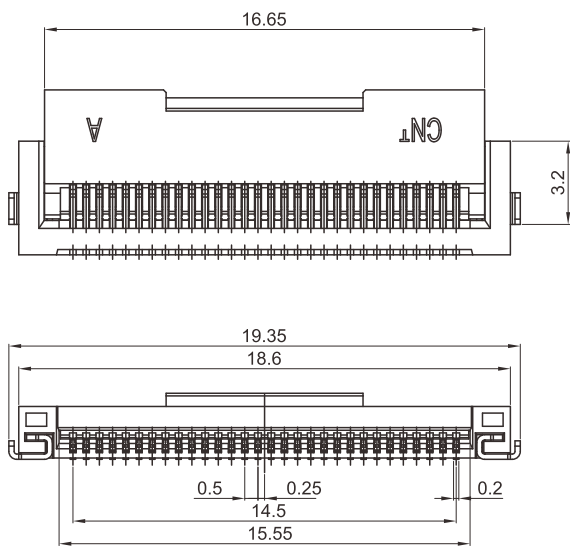


线数 Poles	型号 Type
30	3041-53230
材质·表面处理 Material and Finish PA46 UL94V-0 磷青铜 局部镀金 Ni under plated over all and Au plated on the contact area	



安装尺寸 MOUNTING MEASUREMENT

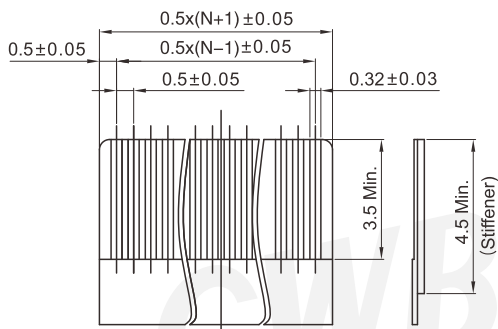

APPLICABLE TCP
RECOMMENDED DIMENSION
(THICKNESS : 0.12 ± 0.03)

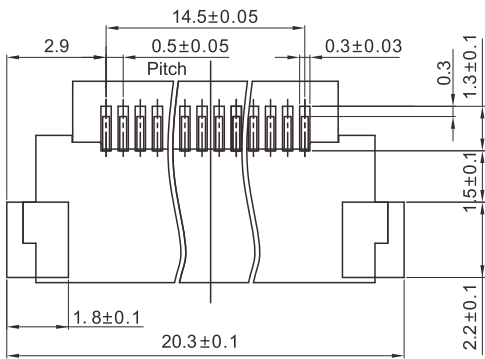

RECOMMENDED P.C.BOARD
PATTERN DIMENSION(REF.)
COMPONENT SIDE