


# C30516 型扁平电缆连接器

## C30516 Flat Cable Connector


间距 ( space ) :0.5mm

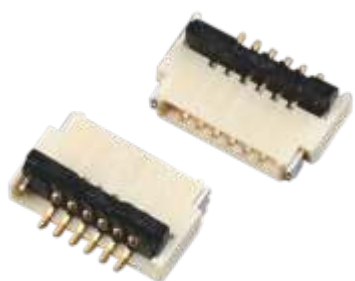

### 技术参数 ( SPECIFICATIONS )

- 温度范围 ( Temperature range ) :  $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$
- 额定电压 ( Voltage rating ) : 50V AC/DC
- 额定电流 ( Current rating ) : 0.5A
- 接触电阻 ( Contact resistance ) :  $\leq 0.1\ \Omega$
- 绝缘电阻 ( Insulation resistance ) :  $\geq 500\text{M}\Omega$
- 耐压 ( Withstand voltage ) : 200V AC/minute

### 阳连接器 HEADER ( 90° )

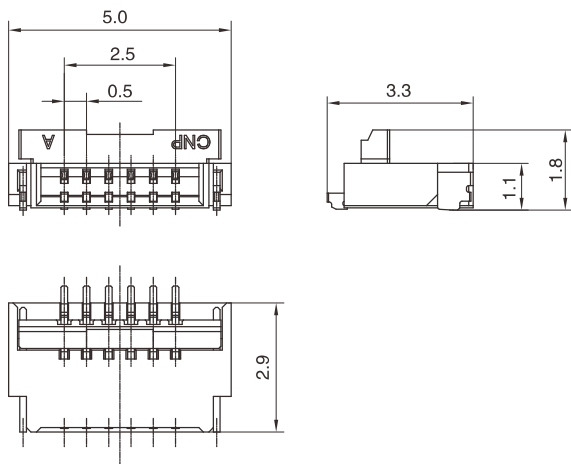

线数 Poles	型号 Type
6	C30516-320060
材质·表面处理 Material and Finish: LCP UL94V-0 磷青铜 镍底部局部镀金 Phos·bronze Ni under plated over all and Au plated on the contact area	

### 安装尺寸 MOUNTING MEASUREMENT

