



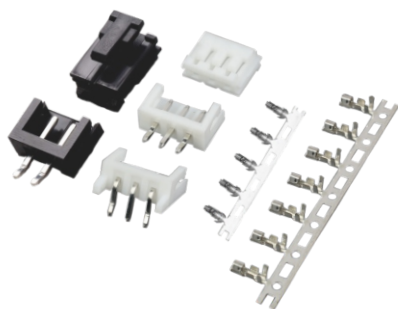

技术参数 (Specifications)


适用线规 (Applicable wires) : AWG#28~AWG#22
适应基板厚度 (Applicable PC board thickness) : 0.8~1.6 mm
温度范围 (Temperature range) : -25℃~85℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 3A
接触电阻 (Contact resistance) : ≤10mΩ
绝缘电阻 (Insulation resistance) : ≥1000MΩ
耐压 (Withstand voltage) : 1000V AC/minute
认证 (Standards) :  E200881

插簧 Contact

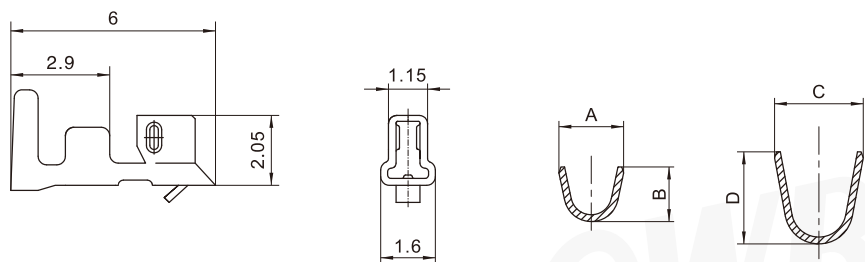


型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis	尺寸 Dimensions (mm)			
	mm²	线型 Wire Type		A	B	C	D
CH-EH	0.2~0.33	24~22	1.4~1.6	1.9	1.6	2.6	2.7
CH-EH-1	0.08~0.13	28~26	1.2~1.3	1.75	1.3	2.5	2.1
材质・表面处理 Material and Finish							
磷青铜 镀锡 Phos・bronze Tin・Plated							

孔座 Housing

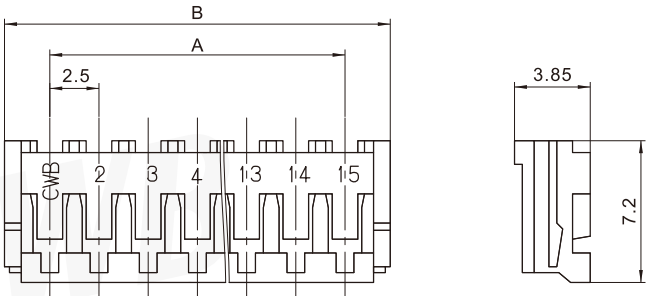


线数 Poles	型号 Type	尺寸Dimensions (mm)		线数 Poles	型号 Type	尺寸Dimensions (mm)	
		A	B			A	B
2	EH-2Y	2.5	7	9	EH-9Y	20	24.5
3	EH-3Y	5	9.5	10	EH-10Y	22.5	27
4	EH-4Y	7.5	12	11	EH-11Y	25	29.5
5	EH-5Y	10	14.5	12	EH-12Y	27.5	32
6	EH-6Y	12.5	17	13	EH-13Y	30	34.5
7	EH-7Y	15	19.5	14	EH-14Y	32.5	37
8	EH-8Y	17.5	22	15	EH-15Y	35	39.5
材质 Material				PA66 UL94V-0			

阳连接器 (立式，直插，含小弯) Header (V, DIP, W/Kink)

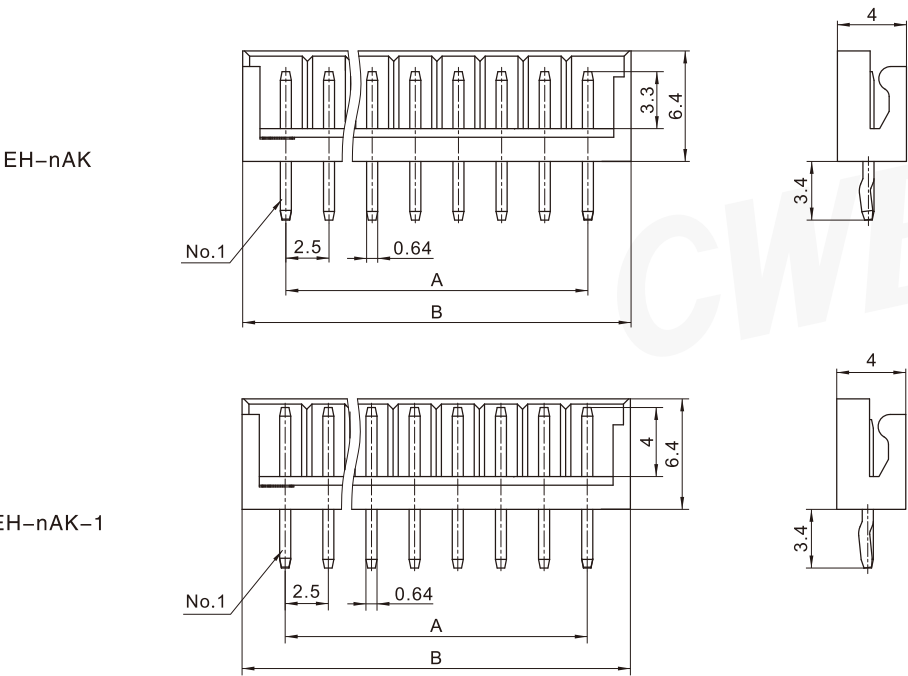


阳连接器 (立式，直插，含定位柱，含小弯) Header (V, DIP, W/Boss, W/Kink)

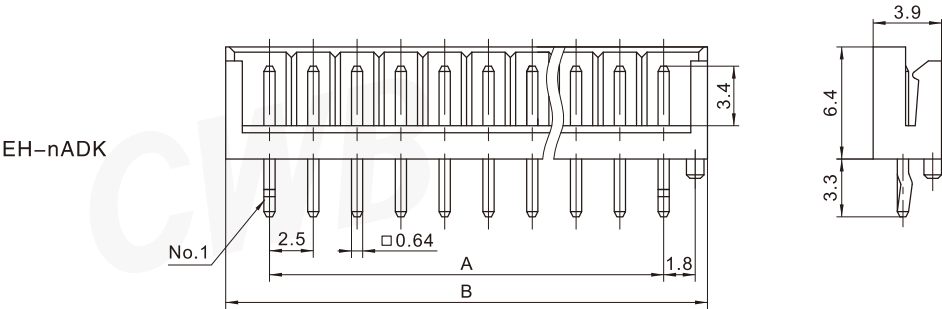


EH 型条形连接器
EH Bar Connector

间距 (space) :2.5mm

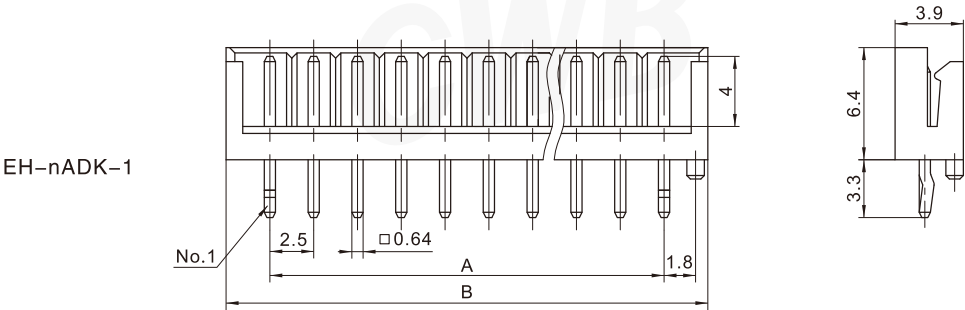

线数 Poles	型号 Type				尺寸 Dimensions (mm)		线数 Poles	型号 Type				尺寸 Dimensions (mm)	
	(V, DIP, W/Kink)	(V, DIP, W/Boss, W/Kink)	(V, DIP, W/Boss, W/Kink)	(V, DIP, W/Boss, W/Kink)	A	B		(V, DIP, W/Kink)	(V, DIP, W/Boss, W/Kink)	(V, DIP, W/Boss, W/Kink)	(V, DIP, W/Boss, W/Kink)	A	B
2	EH-2AK	EH-2AK-1	EH-2ADK	EH-2ADK-1	2.5	7.5	9	EH-9AK	EH-9AK-1	EH-9ADK	EH-9ADK-1	20	25
3	EH-3AK	EH-3AK-1	EH-3ADK	EH-3ADK-1	5	10	10	EH-10AK	EH-10AK-1	EH-10ADK	EH-10ADK-1	22.5	27.5
4	EH-4AK	EH-4AK-1	EH-4ADK	EH-4ADK-1	7.5	12.5	11	EH-11AK	EH-11AK-1	EH-11ADK	EH-11ADK-1	25	30
5	EH-5AK	EH-5AK-1	EH-5ADK	EH-5ADK-1	10	15	12	EH-12AK	EH-12AK-1	EH-12ADK	EH-12ADK-1	27.5	32.5
6	EH-6AK	EH-6AK-1	EH-6ADK	EH-6ADK-1	12.5	17.5	13	EH-13AK	EH-13AK-1	EH-13ADK	EH-13ADK-1	30	35
7	EH-7AK	EH-7AK-1	EH-7ADK	EH-7ADK-1	15	20	14	EH-14AK	EH-14AK-1	EH-14ADK	EH-14ADK-1	32.5	37.5
8	EH-8AK	EH-8AK-1	EH-8ADK	EH-8ADK-1	17.5	22.5	15	EH-15AK	EH-15AK-1	EH-15ADK	EH-15ADK-1	35	40
材质・表面处理 Material and Finish													
PA66 UL94V-0; 黄铜 镀锡 Brass Tin-Plated													


阳连接器 (卧式，直插，含小弯) Header (H, DIP, W/Kink)

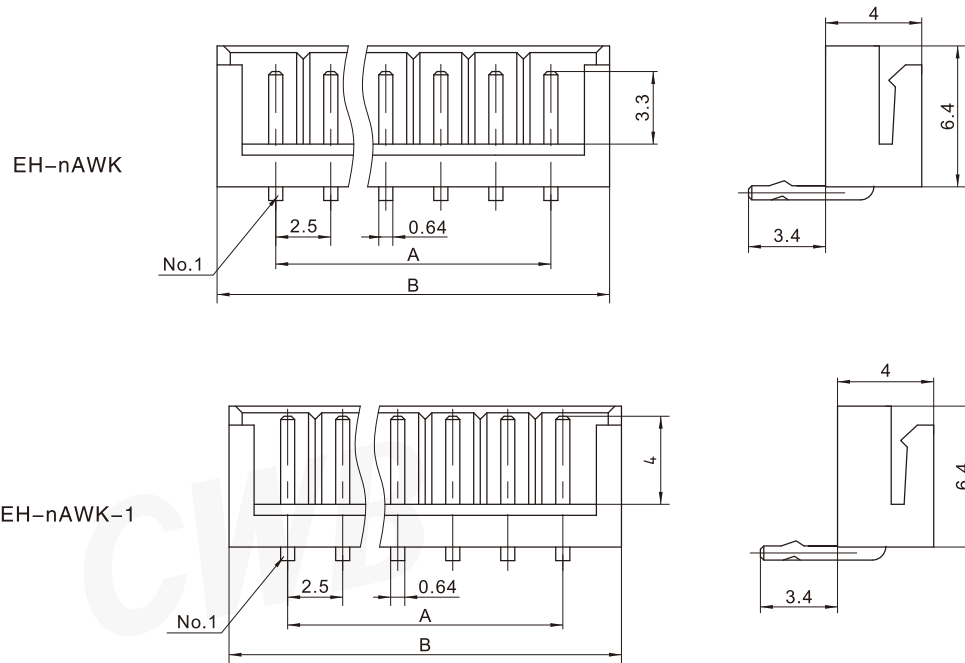

EH 型条形连接器
EH Bar Connector

间距 (space) :2.5mm


阳连接器 (卧式，直插，带挡板，含小弯) Header (H, DIP, W/PCB stabilizer, W/Kink)

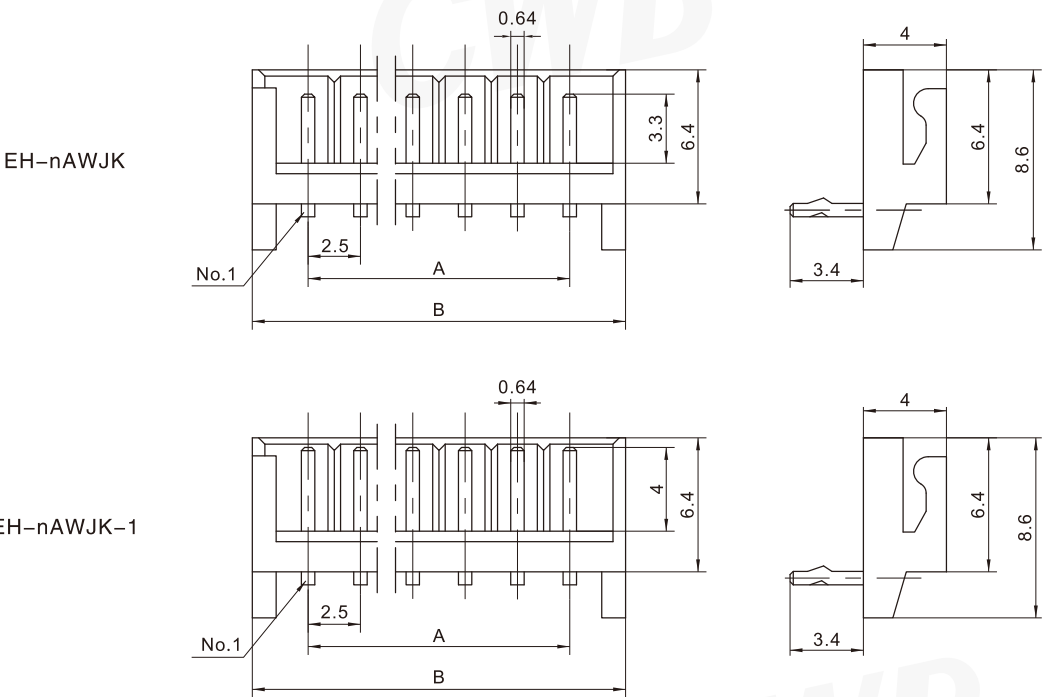


线数 Poles	型号 Type				尺寸 Dimensions (mm)		线数 Poles	型号 Type				尺寸 Dimensions (mm)	
	(H, DIP, W/Kink)		(H, DIP, W/PCB stabilizer, W/Kink)		A	B		(H, DIP, W/Kink)		(H, DIP, W/PCB stabilizer, W/Kink)		A	B
2	EH-2AWK	EH-2AWK-1	EH-2AWJK	EH-2AWJK-1	2.5	7.5	9	EH-9AWK	EH-9AWK-1	EH-9AWJK	EH-9AWJK-1	20	25
3	EH-3AWK	EH-3AWK-1	EH-3AWJK	EH-3AWJK-1	5	10	10	EH-10AWK	EH-10AWK-1	EH-10AWJK	EH-10AWJK-1	22.5	27.5
4	EH-4AWK	EH-4AWK-1	EH-4AWJK	EH-4AWJ K-1	7.5	12.5	11	EH-11AWK	EH-11AWK-1	EH-11AWJK	EH-11AWJK-1	25	30
5	EH-5AWK	EH-5AWK-1	EH-5AWJK	EH-5AWJ K-1	10	15	12	EH-12AWK	EH-12AWK-1	EH-12AWJK	EH-12AWJK-1	27.5	32.5
6	EH-6AWK	EH-6AWK-1	EH-6AWJK	EH-6AWJ K-1	12.5	17.5	13	EH-13AWK	EH-13AWK-1	EH-13AWJK	EH-13AWJK-1	30	35
7	EH-7AWK	EH-7AWK-1	EH-7AWJK	EH-7AWJ K-1	15	20	14	EH-14AWK	EH-14AWK-1	EH-14AWJK	EH-14AWJK-1	32.5	37.5
8	EH-8AWK	EH-8AWK-1	EH-8AWJK	EH-8AWJ K-1	17.5	22.5	15	EH-15AWK	EH-15AWK-1	EH-15AWJK	EH-15AWJK-1	35	40
材质・表面处理 Material and Finish													
PA66 UL94V-0; 黄铜 镀锡 Brass Tin・Plated													

安装尺寸 Mounting Measurement


EH-2ADK/EH-nADK-1

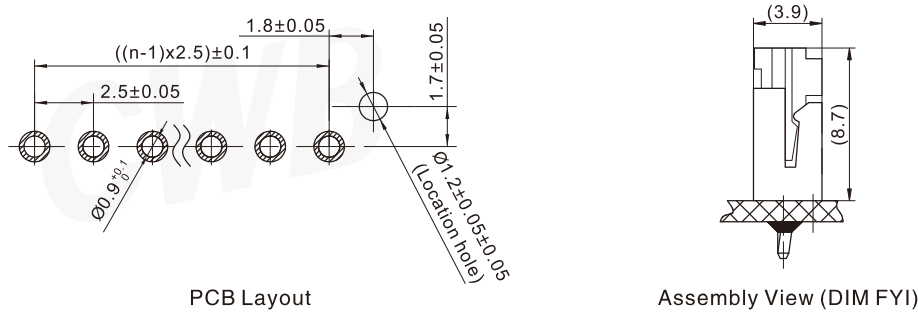

EH-nAK/EH-nAWK/EH-nAWJK

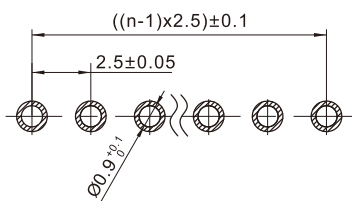

PCB Layout

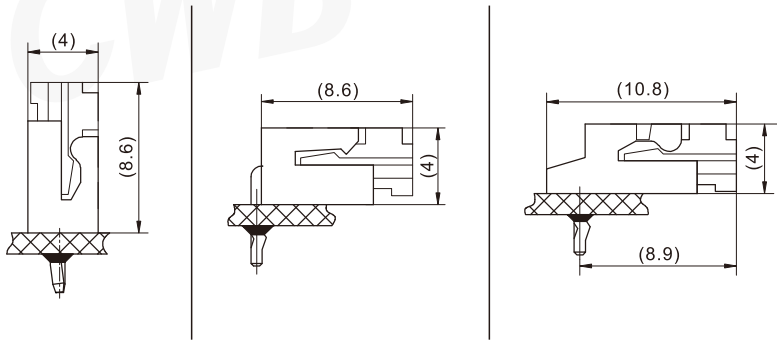

Assembly View (DIM FYI)