

IL-FPC 型条形连接器
IL-FPC Bar Connector

间距 (space) :1.25mm




技术参数 (SPECIFICATIONS)

- 适用线缆 (Useable wire range) : FPC/FFC T=0.3±0.05mm 1.25P
- 适应基板厚度 (Applicable PC board thickness) : 1.1 mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 200V AC/DC
- 额定电流 (Current rating) : 1A
- 接触电阻 (Contact resistance) : ≤0.025 Ω
- 绝缘电阻 (Insulation resistance) : ≥100MΩ
- 耐压 (Withstand voltage) : 500V AC/minute


认证 (STANDARDS) :  E200881

阴连接器 HOUSING

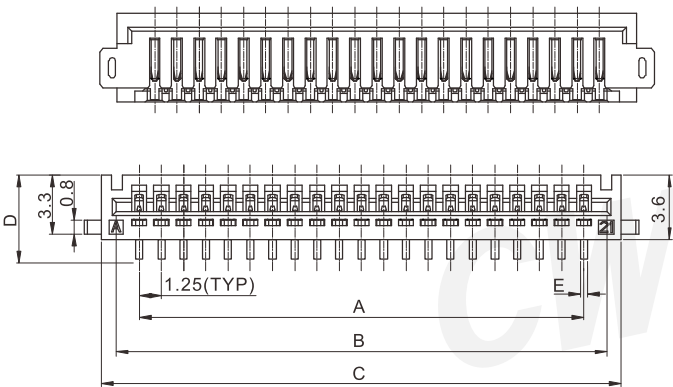

线数 Poles	型号 Type	尺寸Dimensions (mm)				
		A	B	C	D	E
21	IL-FPC-21CLIP0.5-C	25.0	27.5	29.2	4.7	0.4
28	IL-FPC-28CLIP0.5-C	33.75	36.25	37.95	4.7	0.4
28	IL-FPC-28CLIP-C	33.75	36.25	37.95	5.1	0.5
材质・表面处理 Material and Finish PAUL94V-0; 磷青铜 镀锡 Phos・bronze Tin・Plated						

阳连接器 HEADER

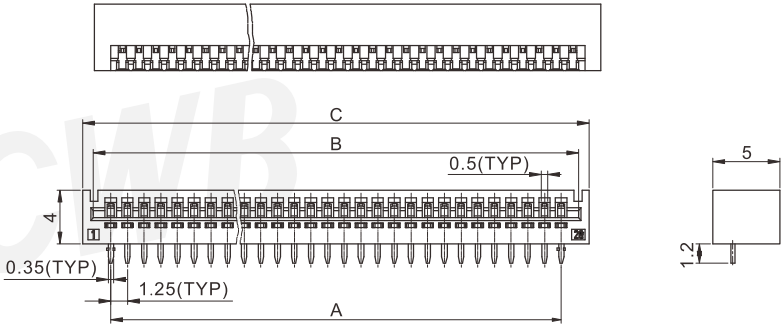

IL-FPC 型条形连接器
IL-FPC Bar Connector

间距 (space) :1.25mm

线数 Poles	型号 Type	尺寸Dimensions (mm)		
		A	B	C
21	IL-FPC-21DIP-C	25.0	27.5	29.2
28	IL-FPC-28DIP-C	33.75	36.25	37.95
材质・表面处理 Material and Finish PA UL94V-0; 磷青铜 镀锡 Phos・bronze Tin・Plated				

安装尺寸 MOUNTING MEASUREMENT

