

IL-Z 型条形连接器

IL-Z Bar Connector

间距 (space) : 1.25mm



技术参数 (SPECIFICATIONS)

温度范围 (Temperature range) : $-40^{\circ}\text{C}\sim 70^{\circ}\text{C}$

额定电压 (Voltage rating) : 200V AC/DC

额定电流 (Current rating) : 1A


接触电阻 (Contact resistance) : $\leq 0.02\Omega$

绝缘电阻 (Insulation resistance) : $\geq 100\text{M}\Omega$

耐压 (Withstand voltage) : 500V AC/minute

认证 (STANDARDS) :  E200881

阳连接器 HEADER

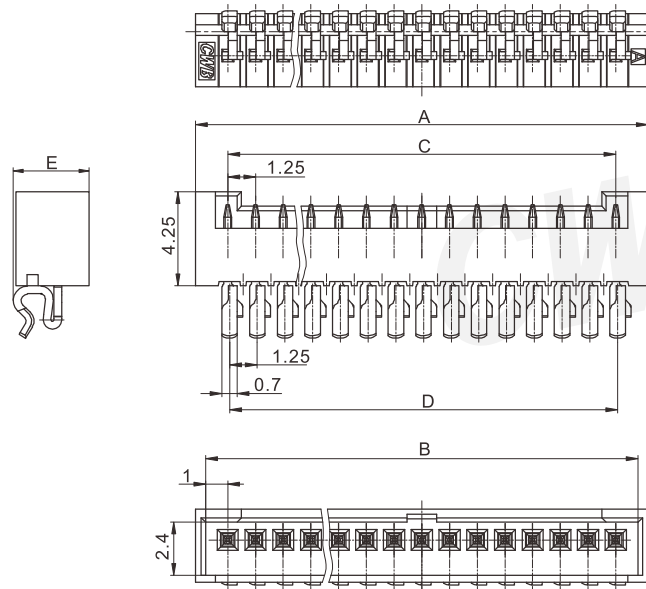


线数 Poles	型号 Type	尺寸Dimensions (mm)					线数 Poles	型号 Type	尺寸Dimensions (mm)				
		A	B	C	D	E			A	B	C	D	E
7	IL-Z-7P -CLIP-E-C	10.4	9.5	7.5	7.5	3.93	7	IL-Z-7P -CLIP0.5-E-C	10.4	9.5	7.5	7.5	3.45
9	IL-Z-9P -CLIP-E-C	20.4	12.0	10.0	10.0	3.93	9	IL-Z-9P -CLIP0.5-E-C	20.4	12.0	10.0	10.0	3.45
15	IL-Z-15P -CLIP-E-C	12.9	19.5	17.5	17.5	3.93	15	IL-Z-15P -CLIP0.5-E-C	12.9	19.5	17.5	17.5	3.45
材质 · 表面处理 Material and Finish		PA UL94V-0; 磷青铜 镀锡 Phos · bronze Tin · Plated											

IL-Z 型条形连接器

IL-Z Bar Connector

间距 (space) : 1.25mm

阳连接器 HEADER

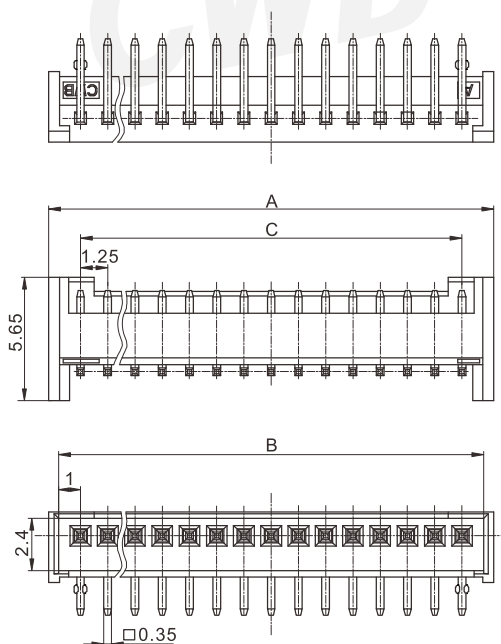

线数 Poles	型号 Type	尺寸Dimensions (mm)		
		A	B	C
7	IL-Z-7P-S125L3--C	10.4	9.5	7.5
9	IL-Z-9P-S125L3-C	20.4	12.0	10.0
15	IL-Z-15P-S125L3-C	12.9	19.5	17.5

材质 · 表面处理 Material and Finish
PA66 UL94V-0; 黄铜 镀锡 Brass Tin · Plated