


M63&MEH 型条形连接器
M63&MEH Bar Connector


间距 (space) :2.5mm

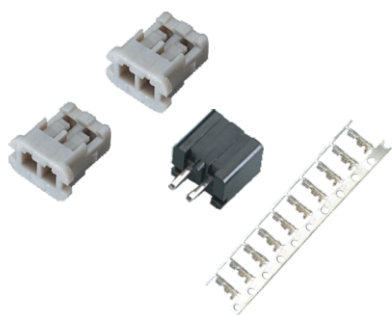

技术参数 (Specifications)


温度范围 (Temprature range) : -25℃~85℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 1.5A
接触电阻 (Contact resistance) : ≤20mΩ
绝缘电阻 (Insulation resistance) : ≥1000MΩ
耐压 (Withstand voltage) : 1000V AC/minute

插簧 Contact

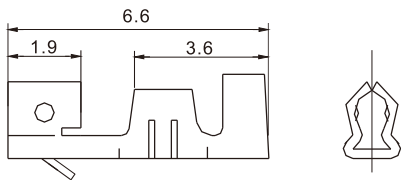


型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm²	AWG#	
CH-M63	0.08~0.22	28~24	1.2~1.4
材质・表面处理 Material and Finish			
磷青铜 镀锡 Phos・bronze Tin・Plated			

孔座 Housing

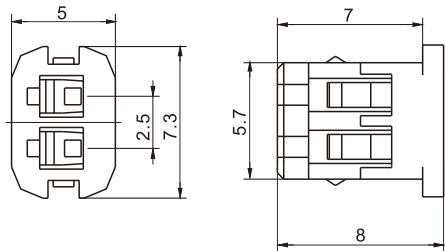

线数 Poles	型号 Type
2	M63
材质 Material	
PA66 UL94V-0	

阳连接器 (立式，直插，含定位柱) Header (V, DIP, W/Boss)

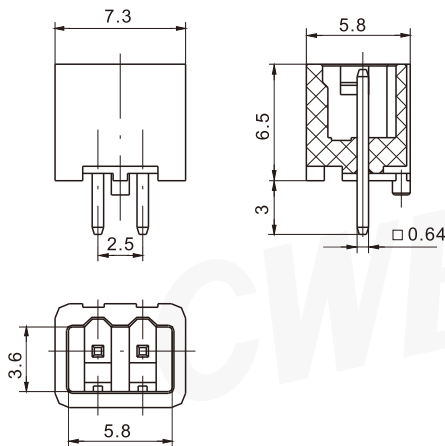


线数 Poles	型号 Type
2	MEH-2AD
材质・表面处理 Material and Finish	
PA66 UL94V-0; 黄铜 镀锡 Brass Tin・Plated	


M63&MEH 型条形连接器
M63&MEH Bar Connector

间距 (space) :2.5mm

安装尺寸 Mounting Measurement



PCB Layout

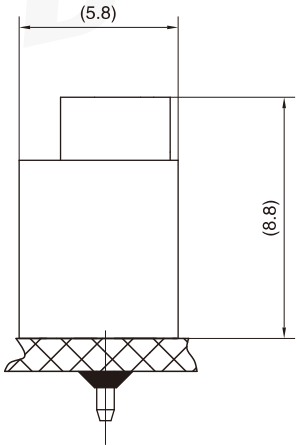

Assembly View (DIM FYI)