

M63 孔座 & MEH 型条形连接器
M63 Housing & MEH Bar Connector


间距 (space) :2.5mm



技术参数 (SPECIFICATIONS)


温度范围 (Temprature range) : -25℃~85℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 1.5A
接触电阻 (Contact resistance) : ≤0.02Ω
绝缘电阻 (Insulation resistance) : ≥1000MΩ
耐压 (Withstand voltage) : 1000V AC/minute

端子 TERMINAL

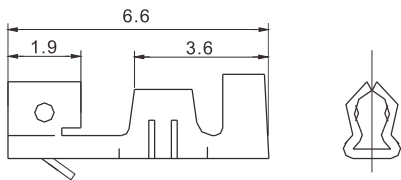


型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm²	AWG#	
CH-M63	0.08~0.22	28~24	1.2~1.4
材质・表面处理 Material and Finish			
磷青铜 镀锡 Phos・bronze Tin・Plated			

阴连接器 HOUSING

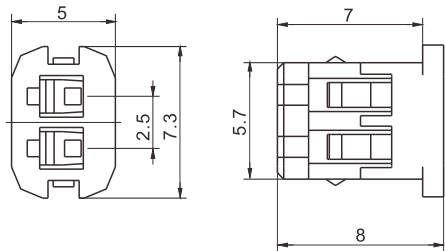

线数 Poles	型号 Type
2	M63
材质・表面处理 Material and Finish	
PA66 UL94V-0	

阳连接器 HEADER

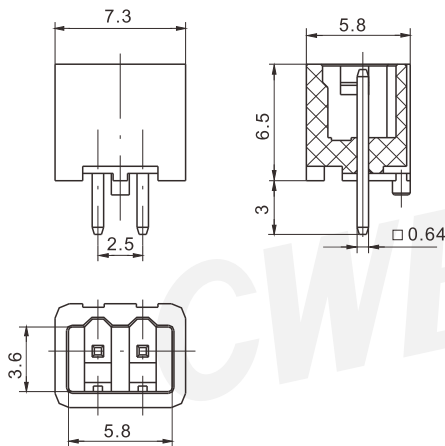


线数 Poles	型号 Type
2	MEH-2AD
材质・表面处理 Material and Finish	
PA66 UL94V-0; 黄铜 镀锡 Brass Tin・Plated	

M63 孔座 &MEH 型条形连接器


M63 Housing&MEH Bar Connector

间距 (space) :2.5mm

安装尺寸 MOUNTING MEASUREMENT



PCB Layout

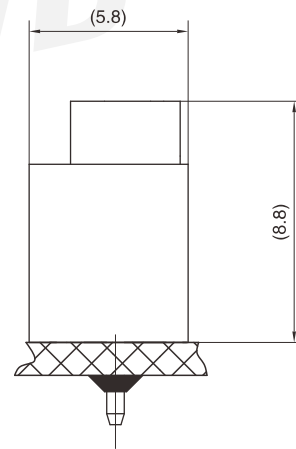

Assembly View (DIM FYI)