

# NTC004 型条形连接器 NTC004 Bar Connector

间距 ( space ) : 2.5mm



## 技术参数 ( Specifications )

适用线规 ( Applicable wires ) : AWG#24~AWG#22

温度范围 ( Temperature range ) : -40°C~125°C


额定电压 ( Voltage rating ) : 125V AC/DC

额定电流 ( Current rating ) : 3A


接触电阻 ( Contact resistance ) :  $\leq 10 \text{ m}\Omega$

绝缘电阻 ( Insulation resistance ) :  $\geq 500 \text{ M}\Omega$

耐电压 ( Withstand voltage ) : 1500V AC/minute



认证 ( Standards ) :  E200881

## 插簧 Contact



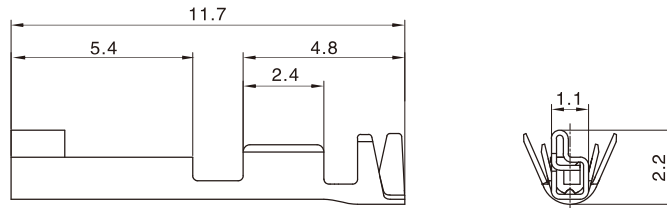


型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm <sup>2</sup>	AWG#	
CH-TJC20074	0.22 ~ 0.35	22 ~ 24	1.0 ~ 1.2
材质 · 表面处理 Material and Finish			
磷青铜 镀锡 Phos · bronze Tin · Plated			

## 阳连接器 (立式, 直插) Header (V, DIP)



线数 Poles	型号 Type
2	NTC004A-2A / NTC004B-2A
材质 · 表面处理 Material and Finish	
PA66 UL94V-0 黄铜 镀锡 Brass Tin · Plated	







# NTC004 型条形连接器

## NTC004 Bar Connector

间距 ( space ) :2.5mm

### 孔座组件Housing Assy



线数 Poles	型号 Type
2	NTC004A-2Y / NTC004B-2Y
材质 · 表面处理 Material and Finish PBT UL94V-0	

CWB