

产品描述: TJC3 系列连接器

Product Description: TJC3 Connector

目录

INDEX

1. 更改履历 Change History
2. 范围 Scope
3. 产品描述 Product Description
4. 相关标准 Related Standards
5. 参数范围 Parameter Ratings
6. 产品性能 Performance
7. 测试分组 Test Sequences

 浙江合兴电子元件有限公司 CWB Electronics (Zhejiang) Co., Ltd.	<u>制定 Edit:</u> 杨晓勇 2018. 5. 13	<u>产品名称 Product Name:</u> TJC3
	<u>审核 Check:</u>	<u>编号 Document No.:</u> PS3882
中国·浙江省乐清市虹桥镇幸福东路 1098 号 合兴工业园 1098,Xingfu `Road(East),CWB Industrial Zone,Hongqiao,Yueqing,Zhejiang 325608,China Tel: 86-577-61313157 Fax: 86-577-62313681	<u>批准 Approval:</u>	<u>版本 REVISION:</u> 6



产品规格书

PRODUCT SPECIFICATION

1. 更改履历 Change History

序号 No.:	版本号 Version No.	更改前描述 Description Before Modification	更改后描述 Description After Modification	日期 Date
1	1	全部旧版规格书	新版规格书	2016.06.08
2	2	TJC3-nA 阳连接器客户图纸无 TJC3-2A 视图, 无 TJC3-nA(无小弯)图纸	新增 TJC3-2A 视图, 新增 TJC3-nA(无小弯) 客户图纸; 更改上锡率标准为 95%, 更新规 格书	2017.09.30
3	3	TJC25038-2Y 尺寸 10 ± 0.3 标注有误	更改为正确标注 8 ± 0.3	2017.12.04
4	4	/	增加灼热丝环境性能检测项目	2018.5.13
5	5	TJC3-nY 客户图纸无缺口位置说明	客户图纸增加对 TJC3-nY 缺口位置说明	2018.9.22
6	6	/	更改 Logo 描述	2019.1.2

产品名称 Product Name:	TJC3	编号 Document No.	PS3882	版本号 VersionNo.	6
-----------------------	------	--------------------	--------	-------------------	---

2. 适用范围 Scope

本产品规格书适用于浙江合兴电子元件有限公司生产的 **CTB 2.5P 阴型 & 阳型电子连接器**，产品名称：**TJC3**。

This product specification covers the requirement for **Cable to Board 2.5 mm pitch Receptacle & Plug connector**, which is designed and manufactured by CWB Electronics(ZheJiang) Co.,LTD. P/N: **TJC3**.

3. 产品描述 Product Description

TJC3 系列产品为家电连接器产品，产品部件组成如下：

The TJC3 series connector designed for home appliances connection. Part checklist as following form:

Name	Part name	Notes
阳连接器 Header	TJC3-nA/TJC3-nA (无小弯)	Wafer: PA66 UL94 V-0/ UL94 V-2, PBT UL94 V-0 Post: Brass, Tin over nickel plating
阳连接器 Header	TJC3-nAJ	Wafer: PA66 UL94 V-0/ UL94 V-2 Post: Brass, Tin over nickel plating
阳连接器 Header	TJC3-nADS	Wafer: PA66 UL94 V-0/ UL94 V-2 Post: Brass, Tin over nickel plating
阳连接器 Header	TJC3-2ADS	Wafer: PA66 UL94 V-0/ UL94 V-2 Post: Brass, Tin over nickel plating
阳连接器 Header	TJC3-nA-3.2	Wafer: PA66 UL94 V-2 / PA6 UL94 V-0 Post: Brass, Tin over nickel plating
阳连接器 Header	TJC3-2A-S	Wafer: PA66 UL94 V-2/ PA66 UL94 V-0 Post: Brass, Tin over nickel plating
阳连接器 Header	TJC3-3AS	Wafer: PA66 UL94 V-0 Post: Brass, Tin over nickel plating
阳连接器 Header	TJC3-nAD	Wafer: PA66 UL94 V-0/ UL94 V-2 Post: Brass, Tin over nickel plating
阳连接器 Header	TJC3-nAW	Wafer: PA66 UL94 V-0/ UL94 V-2 Post: Brass, Tin over nickel plating
阳连接器 Header	TJC3-nAW-3.2	Wafer: PA66 UL94 V-0/ UL94 V-2 Post: Brass, Tin over nickel plating
阳连接器 Header	TJC3-nAWJ	Wafer: PA66 UL94 V-0/ UL94 V-2, PBT UL94 V-0 Post: Brass, Tin over nickel plating
阳连接器 Header	TJC3-nAWJ-3.2	Wafer: PA66 UL94 V-0/ UL94 V-2 Post: Brass, Tin over nickel plating
阳连接器 Header	TJC3-nAWJ-3.2 (平弯)	Wafer: PA66 UL94 V-0/ UL94 V-2 Post: Brass, Tin over nickel plating
阳连接器 Header	TJC3-nAB	Wafer: LCP UL94 V-0 Post: Brass, Tin plating Solder Tab: Phosphor bronze, Tin plating
条形连接器孔座 Housing	TJC3-nY	PA66 UL94 V-0/ UL94 V-2, PA6 UL94 V-0, PBT UL94 V-0
条形连接器孔座 Housing	TJC3-2Y-S	PA66 UL94 V-0/ UL94 V-2
条形连接器孔座 Housing	TJC25030-nY	PA66 UL94 V-0

产品名称 Product Name:	TJC3	编号 Document No.	PS3882	版本号 VersionNo.	6
-----------------------	------	--------------------	--------	-------------------	---

Name	Part name	Notes
锁紧片 Lock Plate	TJC25030-nYS	PA66 UL94 V-0
条形连接器孔座 Housing	TJC25038-2Y	PA66 UL94 V-0
锁紧片 Lock Plate	TJC25038-2YS	PA66 UL94 V-0
插簧 Contact	TJC3/TJC3-1	Phosphor bronze, Tin plating

4. 相关标准 Related Standards

以下参考文件是本规格书的一个组成部份。若本规格书中的要求与产品图纸发生冲突，则产品图中的要求为优先；若本规格书中的要求与参考文件中的要求冲突，则本规格书为优先。

The following documents form a part of this specification. In the event of conflict between the requirements of this specification and the product drawing, the product drawing shall take precedence. In the event of conflict between the requirements of this specification and the referenced documents, this specification shall take precedence.

- GB/T 2421 电工电子产品环境试验 第一部分 总则
Testing Method for Environmental of Electrical Connectors Class 1: General Principles
- GB/T 2423 电工电子产品环境试验方法
Testing Method for Environmental of Electrical Connectors
- GB/T 2424 电工电子产品环境试验导则
Testing Method for Environmental of Electrical Connectors
- GB/T 5095 电子设备用机电元件基本试验规程及测量方法
Testing procedure/Method for components of electric equipment

产品符合合兴企标 Q/HX J1150001 《产品及所用材料的环保要求》 I类或顾客要求。

The connector should comply with CWB standard Q/HX J1150001 Class I or customer's requests.

5. 参数范围 Parameter Ratings:

额定电流 Rated Current	AWG28 1.5A	AWG26 2A	AWG24 2.5A	AWG22 3A
适用 PCB 板 Applicable P.C.B	Board Thickness: 1.6mm Hole Diameter: 0.9mm-1.0mm			
额定电压 Rated Voltage	250V [AC(有效值 rms)/DC]			
使用温度范围 Operating temperature range	-30°C ~ +105°C			
适用线型 Applicable wires	TJC3-1 插簧	Wire Size: AWG28~AWG26(0.08 mm ² -0.1288 mm ²) Insulation Diameter: 1.2mm~1.3mm		
	TJC3 插簧	Wire Size: AWG24~AWG22(0.2047 mm ² -0.3256 mm ²) Insulation Diameter: 1.4mm~1.6mm		

产品名称 Product Name:	TJC3	编号 Document No.	PS3882	版本号 VersionNo.	6
-----------------------	------	--------------------	--------	-------------------	---

6. 产品性能 Performance

6.1 机械性能 Mechanical

序号 No.	项 目 Item	测试条件 Test Condition	规 格 Requirement			
6.1.1	外观 Appearance	目测 Checking by eye 视力: 1.0 以上 Eyesight: > 1.0 照明: (200~300) lx Lamp: (200~300) lx 目测距离: (0.3~0.5) m Space: (0.3~0.5) m GB/T 5095.1 Method 1a	1. 塑料件表面应无明显疤痕、凹陷、开裂及影响使用的变形。 Plastic part: smooth and flat surface without discolor, broken, crack, and distortion, etc. 2. 金属件表面无锈蚀、氧化、无明显的机械损伤及电镀层脱落等缺陷。 Metal part: bright and even surface without rust, oxide, fog and obvious physical damage, etc.			
6.1.2	端子的插入力和固定力 Retention Force for Contact	固定连接器和/或测力计, 在连接器轴线方向插入和拔出; 速度不大于 25 mm/min Axial Insert and withdraw force on the contact in the housing wafer at a rate of 25 mm per minute. GB/T 5095.8 Method 15a / EIA-364-29B	插入力 (Insertion) Max.	固定力 (Retention) (TJC3 无锁紧片) Min.	固定力 (Retention) (TJC25030 带锁紧片) Min.	
			10N	25N	30N	
6.1.3	针的固定力 Retention Force for Pin	固定连接器/或测力计, 在连接器轴线方向施加推力进行测试, 速度不大于 25mm/min。 Apply thrust force on the pin in the wafer at a rate of 25 mm/min . GB/T 5095.8 Method 15a / EIA-364-29B	10N Min			
6.1.4	插簧与插针的插拔力 Insertion and Withdrawal Force for Pin in the Contact	固定端子和/或测力计, 在连接器轴线方向插入和拔出; 速度不大于 25 mm/min Axial Insert and withdraw force on the pin contact in the socket contact of 25 mm per minute. GB/T 5095.7 Method 13b / EIA-364-13B	插入力 (Insertion) Max.		拔出力 (Withdrawal Force) min.	
			9.8N		0.2N	
6.1.5	成品插入力与拔出力 (去锁扣) Insertion and Withdrawal Force for Connector (without lock)	固定连接器和/或测力计, 在连接器轴线方向插入和拔出; 速度不大于 25mm/min Apply Axial Insert and withdraw force on the connector at a rate of 25 mm per minute. GB/T 5095.7 Method 13b / EIA-364-13B	PIN	首次插入力 (Insertion 1st) MAX	首次拔出力 (Withdrawal 1st) MIN	五十次后拔出力 (Withdrawal 50th) MIN
			2P	29.4N	7.8N	5.9N
			3P	34.3 N	9.8N	7.8N
			4P	39.2N	11.8N	8.8N
			5P	44.1N	11.8N	8.8N
			6P	49.0N	13.7N	9.8N
			7P	53.9N	13.7N	9.8N
			8P	58.8N	15.7N	11.8N
			9P	63.7N	15.7N	11.8N
			10P	68.6N	17.6N	13.7N
			11P	73.5N	17.6N	13.7N
			12P	78.4N	19.6N	15.7N
			13P	83.3N	19.6N	15.7N
			14P	88.2N	21.6N	17.6N
15P	93.1N	23.5N	19.6N			
16P	98.0N	23.5N	19.6N			

产品名称 Product Name:	TJC3	编号 Document No.	PS3882	版本号 VersionNo.	6
-----------------------	------	--------------------	--------	-------------------	---

6.1.6	压着部位抗张强度 Crimping Pull Out Force	<p>在试验装置夹头中固定试验样品，在连接的轴线方向施加张力;速度不大于 25 mm/min</p> <p>Fix the crimped contact, Axial pull out force on the contact in the wire at a rate less than 25 mm per minute.</p> <p>GB/T5095.8-1997 Method 16d / EIA-364-08B</p>	<p>AWG 28#: 10N Min.</p> <p>AWG 26#: 20N Min.</p> <p>AWG 24#: 30N Min.</p> <p>AWG 22#: 40N Min.</p>
6.1.7	机械振动 Random Vibration	<p>插合连接器，串联在一直流电源上,电流100mA;并模拟正常工作状态；振频为（10~55~10）Hz，每个循环时间为1分钟，振幅1.52mm。沿XYZ三轴正反方向各循环2h。</p> <p>Mated connectors subjected to following vibration conditions, for a period of 2 hours in each of 3 mutually perpendicular axes, 100 mA current shall be applied.</p> <p>Frequency: (10~55~10) HZ/minute</p> <p>Amplitude: 1.52mm</p> <p>GB/T 5095.4 Method 6d / EIA-364-28D</p>	<p>外观：无损伤（参照6.1.1）</p> <p>Appearance: No damage.(refer to 6.1.1)</p> <p>接触电阻：0.02Ω Max。</p> <p>Contact resistance: 0.02Ω Max.</p> <p>中断：1μsec Max。</p> <p><1μsec discontinuity</p>
6.1.8	机械冲击 Shock	<p>连接器相配，沿XYZ三轴正反方向各冲击3次(总共18次)，在测试过程中通以100mA电流。</p> <p>冲击强度：490m/s²</p> <p>持续时间：11ms</p> <p>Mated connectors and subject to the following shock conditions, 3times of shock shall be applied for each 6 directions along 3 mutually perpendicular axes, passing DC 100mA current during the test.(Total of 18 shocks) Test Pulse:</p> <p>Half Sine Peak Value: 490m/s²</p> <p>Duration: 11ms</p> <p>GB/T 5095.4 Method 6c / EIA-364-27B</p>	<p>外观：无损伤（参照6.1.1）</p> <p>Appearance: No damage.(refer to 6.1.1)</p> <p>中断：1μsec Max。</p> <p><1μsec discontinuity</p>
6.1.9	机械寿命 Durability of Contact Resistance	<p>以每分钟 10 次的速度插拔 50 次。</p> <p>50 cycles mating and unmating test at the speed 10 cycles per minute</p> <p>GB/T 5095.5 Method 9a / EIA-364-09C</p>	<p>外观：无损伤（参照6.1.1）</p> <p>Appearance: No damage.(refer to 6.1.1)</p> <p>接触电阻：0.02ΩMax</p> <p>Contact Resistance: 0.02ΩMax.</p>

6.2 电气性能 Electrical

序号 No.	项 目 Item	测试条件 Test Condition	规格 Requirement
6.2.1	接触电阻 Low Level Contact Resistance	<p>插配阴阳连接器后,用小功率电路进行测试</p> <p>Mate connectors with dry circuit to test contact resistance</p> <p>GB/T 5096.2 Method 2a / EIA-364-23B</p>	<p>0.01Ω Max (Initial)</p> <p>0.02Ω Max(Final)</p>

产品名称 Product Name:	TJC3	编号 Document No.	PS3882	版本号 VersionNo.	6
-----------------------	------	--------------------	--------	-------------------	---

6.2.2	绝缘电阻 Insulation Resistance	<p>相邻接触件之间或地线之间,用 500V DC 电压进行测试.</p> <p>Apply a voltage of 500 VDC between adjacent contacts and between contacts to ground.</p> <p>GB/T 5096.2 Method 3a / EIA-364-21C</p>	<p>1000 MΩ Min (Initial)</p> <p>500 MΩ Min (Final)</p>
6.2.3	耐电压 Withstand Voltage	<p>相邻接触件之间或地线之间施加 1000V AC (有效值),漏电流 1mA 的电压作用,时间 1min.</p> <p>Apply a voltage of AC 1000 V for 1 minute between adjacent contacts and between contacts to ground.</p> <p>GB/T 5096.2 Method 4a / EIA-364-20B</p>	<p>外观: 无击穿和飞弧现象</p> <p>Appearance: No Breakdown</p>
6.2.4	温升 Temperature Rise	<p>插入连接器, 通以最大允许电流, 测温度的差值</p> <p>Mate connectors and measure the temperature rise of contact when the maximum AC rated current is passed.</p> <p>GB/T 5096.3 Method 5a / EIA-364-70</p>	<p>Δ30°C Max(Δ30K Max)</p>

6.3 环境性能 Environmental

序号 No.	项 目 Item	测试条件 Test Condition	规 格 Requirement
6.3.1	耐高温 Heat Resistance	<p>连接器配合后, 于 105±2°C 的空气中放置 240 小时, 再回到室温中放置 1-2 小时测定</p> <p>Mate connector exposed to the condition of 105±2°C for 240 hours. Recovery time 1~2 hours</p> <p>GB/T 5095.6 Method 11i / EIA-364-17B</p>	<p>外观: 无损伤 (参照6.1.1)</p> <p>Appearance: No damage.(refer to 6.1.1)</p> <p>接触电阻: 0.02Ω Max.</p> <p>Contact resistance: 0.02Ω Max.</p> <p>绝缘电阻: 500 MΩ Min.</p> <p>Insulation Resistance : 500 MΩ Min.</p> <p>耐电压: 1000V Min.</p> <p>Withstand Voltage: 1000V Min.</p>
6.3.2	耐低温 Cold Resistance	<p>连接器配合后, 于 -40±2°C 的空气中放置 96 小时, 再回到室温中放置 1-2 小时测定</p> <p>Mate connector exposed to the condition of -40±2°C for 96 hours. Recovery time 1~2 hours</p> <p>GB/T 5095.6 Method 11j / EIA-364-17B</p>	<p>外观: 无损伤 (参照6.1.1)</p> <p>Appearance: No damage.(refer to 6.1.1)</p> <p>接触电阻: 0.02ΩMax.</p> <p>Contact Resistance: 0.02ΩMax.</p>
6.3.3	恒定湿热 Humidity	<p>温度(40±2)°C, 相对湿度(90~95)% 搁置时间 240h, 取出恢复 (1~2) h 后检查.</p> <p>Mated connector exposed to the condition of +40±2°C and 90~95% Humidity for 240 hours.</p> <p>Recovery time 1~2 hours</p> <p>GB/T 5095.6 Method 11c / EIA-364-31B</p>	<p>外观: 无损伤 (参照6.1.1)</p> <p>Appearance: No damage.(refer to 6.1.1)</p> <p>接触电阻: 0.02ΩMax.</p> <p>Contact Resistance: 0.02ΩMax.</p> <p>绝缘电阻: 500 MΩ Min.</p> <p>Insulation Resistance : 500 MΩ Min.</p> <p>耐电压: 1000V Min;</p> <p>Withstand Voltage:1000V Min.</p>

产品名称 Product Name:	TJC3	编号 Document No.	PS3882	版本号 VersionNo.	6
-----------------------	------	--------------------	--------	-------------------	---

6.3.4	温度循环 Temperature Cycling	<p>把试验样品分别放入高、低温试验箱中，按下列步骤调试温度：</p> <p>a) 在(-55±2)℃的恒温条件下放置 0.5h；</p> <p>b) 在(85±2)℃的恒温条件下放置 0.5h；</p> <p>从 a)到 b)为一个循环周期，周期温度转换时间应不大于 5 分钟，共进行 25 个循环,恢复(1~2)h 后检查。</p> <p>Mate connectors shall be tested under the following conditions</p> <table border="1" data-bbox="411 571 944 772"> <thead> <tr> <th>Temperature</th> <th>℃</th> <th>Duration (Minutes)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-55</td> <td>30</td> </tr> <tr> <td>2</td> <td>+25</td> <td>5Max</td> </tr> <tr> <td>3</td> <td>+85</td> <td>30</td> </tr> <tr> <td>4</td> <td>+25</td> <td>5Max</td> </tr> </tbody> </table> <p>Step 1 to 4 is one cycle, 25 cycles shall be tested. Recovery time 1~2 hours.</p> <p>GB/T 5095.6 method 11d / EIA-364-32C</p>	Temperature	℃	Duration (Minutes)	1	-55	30	2	+25	5Max	3	+85	30	4	+25	5Max	<p>外观：无损伤（参照6.1.1）</p> <p>Appearance: No damage.(refer to 6.1.1)</p> <p>接触电阻：0.02ΩMax.</p> <p>Contact Resistance: 0.02ΩMax.</p> <p>绝缘电阻：500 MΩ Min.</p> <p>Insulation Resistance : 500 MΩ Min.</p> <p>耐电压：1000V Min;</p> <p>Withstand Voltage:1000V Min.</p>
Temperature	℃	Duration (Minutes)																
1	-55	30																
2	+25	5Max																
3	+85	30																
4	+25	5Max																
6.3.5	盐雾 Salt Spray	<p>把试验样品从试验箱顶悬挂下来，采用浓度为(5±1)% (质量百分比)的氯化钠溶液，在(35±2)℃温度下连续雾化 48h, 试验后用流动的蒸馏水轻轻洗去表面沉积物。在常温常湿条件下恢复 (1~2) h</p> <p>48 hours spray, at temp (35±2) °C, NaCl mist concentration (5±1)% 。 After test, wash parts and put it into room ambient for 1~2 hours</p> <p>GB/T 5095.6 Method 11f /EIA-364-26B</p>	<p>外观：无损伤(五金件应无露出底金属的严重锈蚀;使用预镀好的型材，其落料面允许有不影响其性能的轻微腐蚀。)</p> <p>Appearance: No Damage (No erosion with material exposed. And with plating material, slight erosion on the cutting surface is acceptable)</p> <p>接触电阻：0.02Ω Max.</p> <p>Contact resistance: 0.02Ω Max.</p>															
6.3.6	可焊性 Solderability	<p>把试验样品需要焊接的部位浸入焊锡炉中，锡炉温度(245±5)℃；时间(4~5)s</p> <p>Dip solder tails into the molten solder(held at (245±5) °C for (4~5) sec.</p> <p>GB/T 5095.6 Method 12a / EIA-364-52</p>	<p>上锡率≥95%：</p> <p>Solder coverage: ≥95%</p>															
6.3.7	耐焊接热 Resistance to Soldering Heat	<p>1.耐波峰焊热：把试验样品需要焊接的部位浸入焊锡炉中，锡炉温度(260±5)℃；时间(5±1)s 后，在正常条件下恢复 1~2h。</p> <p>Resistance to Wave Soldering Heat : Dip solder tails into the molten solder held at (260±5) °C for (5 ±1) sec., Recovery time 1~2 hours</p> <p>2.手工焊接：温度(350±10)℃，时间(1~2) s</p> <p>Manual soldering : (350±10)°C for (1~2) seconds</p> <p>GB/T 5095.6 Method 12E / EIA-364-56A</p>	<p>外观：无损伤（参照6.1.1）</p> <p>Appearance: No damage.(refer to 6.1.1)</p>															
6.3.8	灼热丝 Glow wire (只针对 GWT750℃产品 Only for GWT750℃ product)	<p>750℃灼热丝顶部接触试验样品，接触时间：(30±1) s</p> <p>接近和离开速率：10mm/s~25mm/s</p> <p>灼热丝进入或贯穿试验样品深度：(7±0.5) mm</p> <p>750℃glow wire contacts with mated connector, Contact Time: (30±1)s</p> <p>Speed of closing to and leaving from: 10mm/s~25mm/s</p> <p>Depth that glow wire penetrates mated connector: (7±0.5) mm</p> <p>GB/T 5169.10</p>	<p>1.试验样品燃烧时间不超过2s。</p> <p>The time that mated connector burns should be not more than 2s.</p> <p>2、灼热丝离开后的30s内样件无火焰或灼热情况，且无滴落物或滴落物不燃烧。</p> <p>Thirty seconds after glow wire leaves mated connector, it does not burn or have no incandescence and it does not fall something, or the falling thing does not burn.</p>															

产品名称 Product Name:	TJC3	编号 Document No.	PS3882	版本号 VersionNo.	6
-----------------------	------	--------------------	--------	-------------------	---



产品规格书




PRODUCT SPECIFICATION

7. 测试分组 Test Sequences (Samples: 5PCS)


测试组 GROUP NUMBER	A	B	C	D	C	D	E	F	G	H	I	J	K	L	M	N
外观 Appearance	1	1	1	1	1	1,5	1,5	1,7	1	1,5	1,5	1,7	1,7	1,5	1,3	1,3
端子插入力和固定力 Retention Force for Contact	2															
针的固定力 Pin Retention Force		2														
插簧与插针插拔力 Insertion and Withdrawal Force for Pin in the Contact			2													
成品插入力与拔出力（去锁扣） Insertion and Withdrawal Force For Connector				2												
压着部位抗张强度 Crimping Pull Out Force					2											
机械振动 Random Vibration						3										
机械冲击 Shock							3									
机械寿命 Durability of Contact Resistance								6								
接触电阻 Low Level Contact Resistance						2,4	2,4	2,5		2,4	2,4	2,4	2,4	2,4		
绝缘电阻 Insulation Resistance								3				5	5			
耐电压 Withstand Voltage								4				6	6			
温升 Temperature Rise									2							
耐高温 Heat Resistance										3						
耐低温 Cold Resistance											3					
恒定湿热 Humidity												3				
温度循环 Temperature Cycling													3			
盐雾 Salt Spray														3		
可焊性 Solderability															2	
耐焊接热 Resistance to Soldering Heat																2

产品名称 Product Name:	TJC3	编号 Document No.	PS3882	版本号 VersionNo.	6
-----------------------	------	--------------------	--------	-------------------	---

General Tolerance			
Dimension	Tolerance	Rev. No	Location
0~3	±0.13		
3~18	±0.16		
18~50	±0.31		
≥50	±0.55		

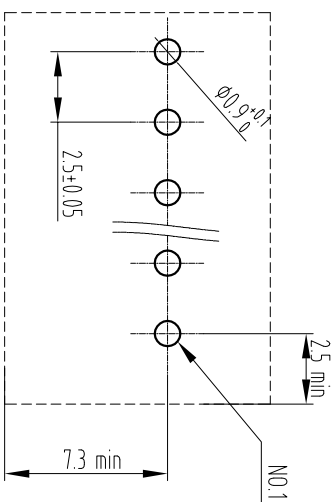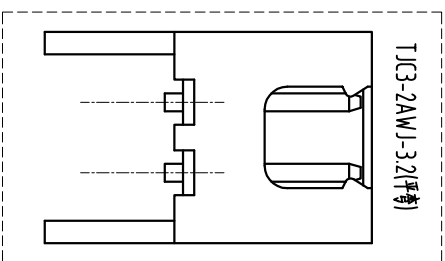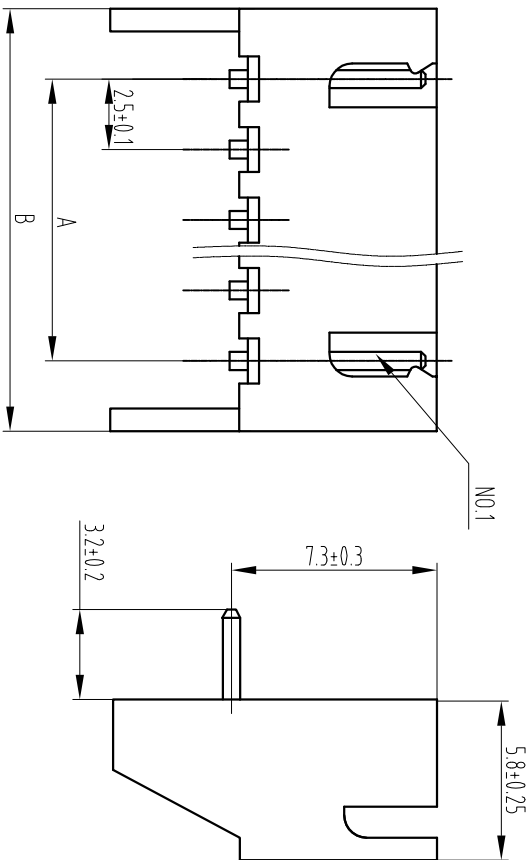

Assembly View
(DIM FY2)

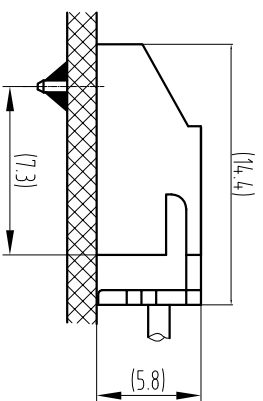

Notes:

- 1.Material: PA66 UL94 V-0 / PA66 UL94 V-2;
- 2.Matched Housing: TJC3-nY/TJC25030-nY;
- 3.Packaging: Packing bag;
- 4.Compliant To The Current Rohs.




Part No.	Part No.	Dimensions
16	TJC3-16AWJ-3.2(平衡)	37.5 42.5
15	TJC3-15AWJ-3.2(平衡)	35 40
14	TJC3-14AWJ-3.2(平衡)	32.5 37.5
13	TJC3-13AWJ-3.2(平衡)	30 35
12	TJC3-12AWJ-3.2(平衡)	27.5 32.5
11	TJC3-11AWJ-3.2(平衡)	25 30
10	TJC3-10AWJ-3.2(平衡)	22.5 27.5
9	TJC3-9AWJ-3.2(平衡)	20 25
8	TJC3-8AWJ-3.2(平衡)	17.5 22.5
7	TJC3-7AWJ-3.2(平衡)	15 20
6	TJC3-6AWJ-3.2(平衡)	12.5 17.5
5	TJC3-5AWJ-3.2(平衡)	10 15
4	TJC3-4AWJ-3.2(平衡)	7.5 12.5
3	TJC3-3AWJ-3.2(平衡)	5 10
2	TJC3-2AWJ-3.2(平衡)	2.5 7.5

CUSTOMER DRAWING

Title: 2.5mm Pitch WT8

Drawn	Unit	Scale	Size	Edition	Part No.:
Uqm 2008.05.14	mm	4:1	A4	B	TJC3-nAWJ-3.2(平衡)
Checked	Sheet No.	1 Of 1	Document No.: CP-DWG-00666		
Approved					Specification No.: PS3882






General Tolerance				Revision		
Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
0~3	±0.13		△	To update the content	XiaoYong Yang	2017.12.04
3~18	±0.16		△	To update the content	XiaoYong Yang	2018.01.05
18~50	±0.31					
≥50	±0.55					

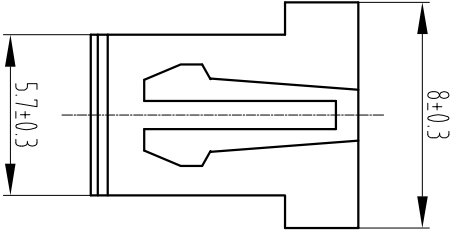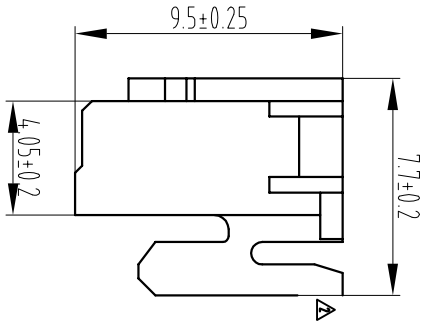

- Notes:
1. Material: PA66 UL94 V-0 ;
 2. Matched Header: TJC3-2ADS ;
 3. Matched Contact: TJC3;
 4. Packaging: Packing bag;
 5. Compliant To The Current RoHS.

CUSTOMER DRAWING				Title:				
Drawn	XiaoYong Yang	2017.10.10	Unit	Scale	Size	Edition	Part No.:	25mm Pitch WTB Housing
Checked			mm	1:1	A4	B	Document No.:	TJC25038-2Y
Approved			Sheet No.	1 OF 1			Specification No.:	CP-DWG-00568
			CWB 浙江森兴电子元件有限公司 CWB Electronics (Zhejiang) Co., Ltd.					

General Tolerance		Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
0~3	±0.13					To update the content	Xuoyang Yang	2017.09.30
3~18	±0.16							
18~50	±0.31							
≥50	±0.55							

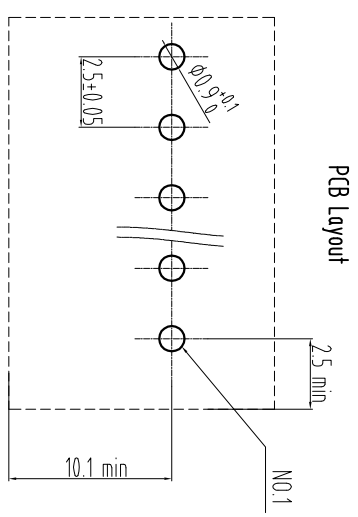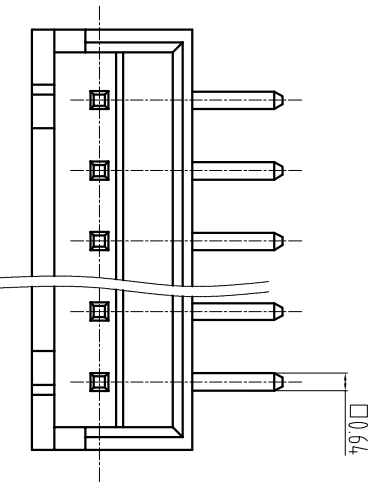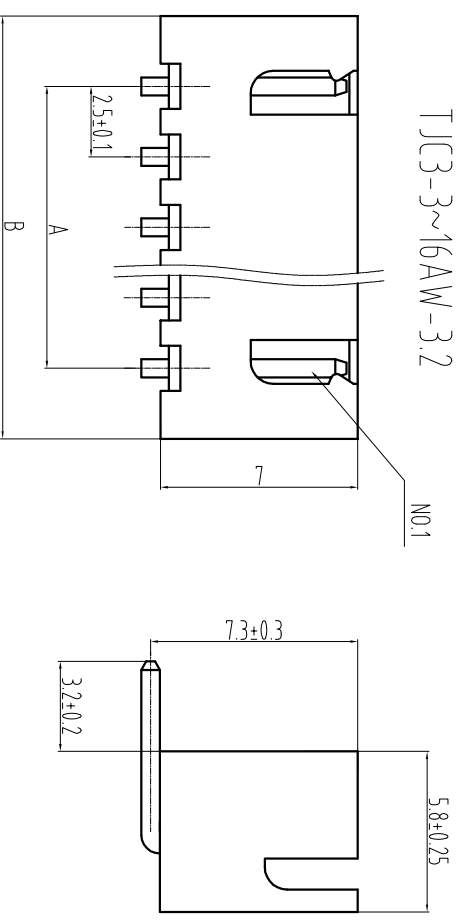

Part No.	Dimensions
16	TJC3-16AW-3.2 37.5 42.5
15	TJC3-15AW-3.2 35 4.0
14	TJC3-14AW-3.2 32.5 37.5
13	TJC3-13AW-3.2 30 35
12	TJC3-12AW-3.2 27.5 32.5
11	TJC3-11AW-3.2 25 30
10	TJC3-10AW-3.2 22.5 27.5
9	TJC3-9AW-3.2 20 25
8	TJC3-8AW-3.2 17.5 22.5
7	TJC3-7AW-3.2 15 20
6	TJC3-6AW-3.2 12.5 17.5
5	TJC3-5AW-3.2 10 15
4	TJC3-4AW-3.2 7.5 12.5
3	TJC3-3AW-3.2 5 10
2	TJC3-2AW-3.2 2.5 7.5

- Notes:
1. Material: PA66 UL94-V-0 / PA66 UL94-V-2;
 2. Matched Housing: TJC3-nY/TJC25030-nY; ▲
 3. Packaging: Packing bag;
 4. Compliant To The Current RoHS.






Brass, Tin over nickel plating;

CUSTOMER DRAWING

Drawn	Liqm	2016.06.08	Unit	mm	Scale	4:1	Size	A4	Edition	B	Part No.:	TJC3-nAW-3.2
Checked			Sheet No.				1 of 1				Document No.:	CP-DWG-00241
Approved			 CWB 浙江合兴电子元件有限公司 CWB Electronics (Zhejiang) Co., Ltd.								Specification No.:	PS3082

Title: 2.5mm Pitch WTB Header


General Tolerance		Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
0~3	±0.13							
3~18	±0.16					Update the content	Xuoyong Yang	2017.09.30
18~50	±0.31							
≥50	±0.55							

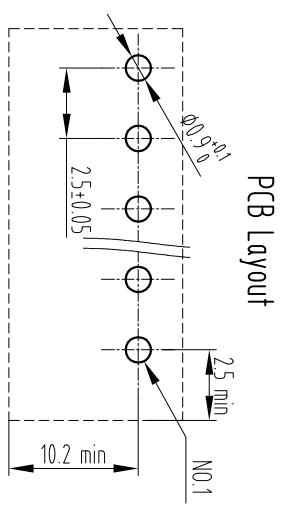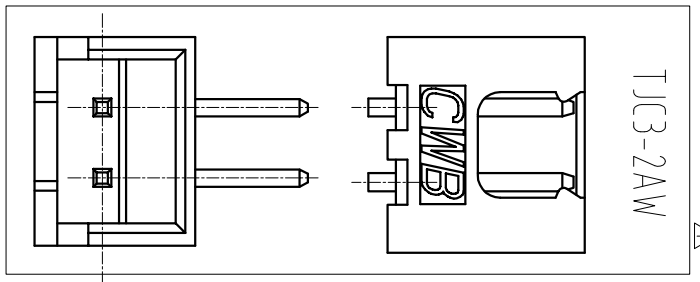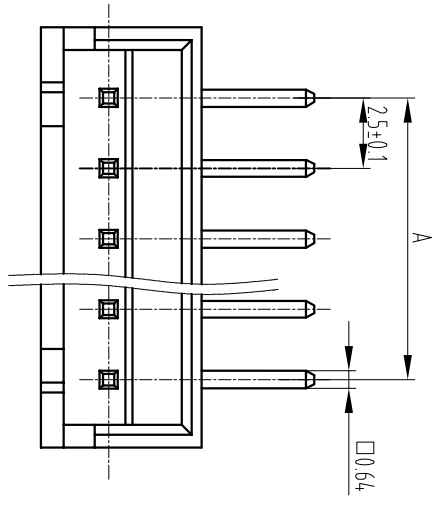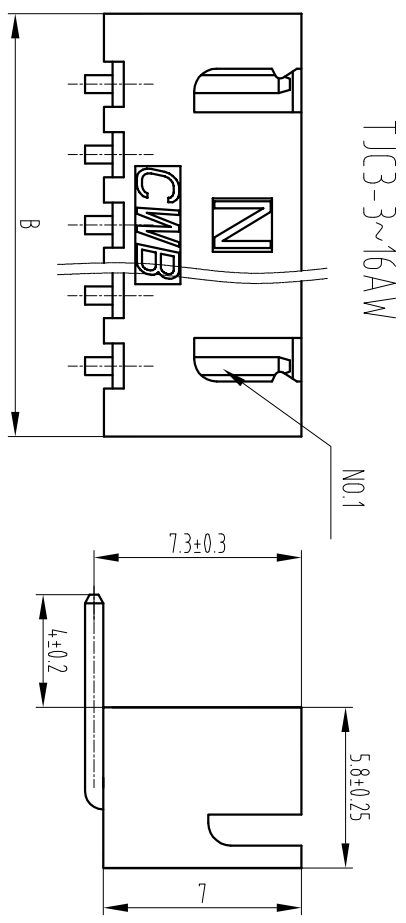



16	TJC3-16AW	37.5	42.5
15	TJC3-15AW	35	40
14	TJC3-14AW	32.5	37.5
13	TJC3-13AW	30	35
12	TJC3-12AW	27.5	32.5
11	TJC3-11AW	25	30
10	TJC3-10AW	22.5	27.5
9	TJC3-9AW	20	25
8	TJC3-8AW	17.5	22.5
7	TJC3-7AW	15	20
6	TJC3-6AW	12.5	17.5
5	TJC3-5AW	10	15
4	TJC3-4AW	7.5	12.5
3	TJC3-3AW	5	10
2	TJC3-2AW	2.5	7.5
(Ckts/n)	Part No.	A	B
		Dimensions	

- Notes:
- 1.Material: PA66 UL94, V-0 / PA66 UL94, V-2;
Brass, Tin over nickel plating;
 - 2.Matched Housing: TJC3-nY/TJC25030-nY ; ▲
 - 3.Packaging: Packing bag;
 - 4.Compliant To The Current RoHS.





CUSTOMER DRAWING				Title:				
Drawn	Liqm	2016.06.08	Unit	Scale	Size	Edition	Part No.:	TJC3-1AW
Checked			mm	4:1	A4	B	Document No.:	CP-DWG-00190
Approved			Sheet No.	1 of 1			Specification No.:	PS3882

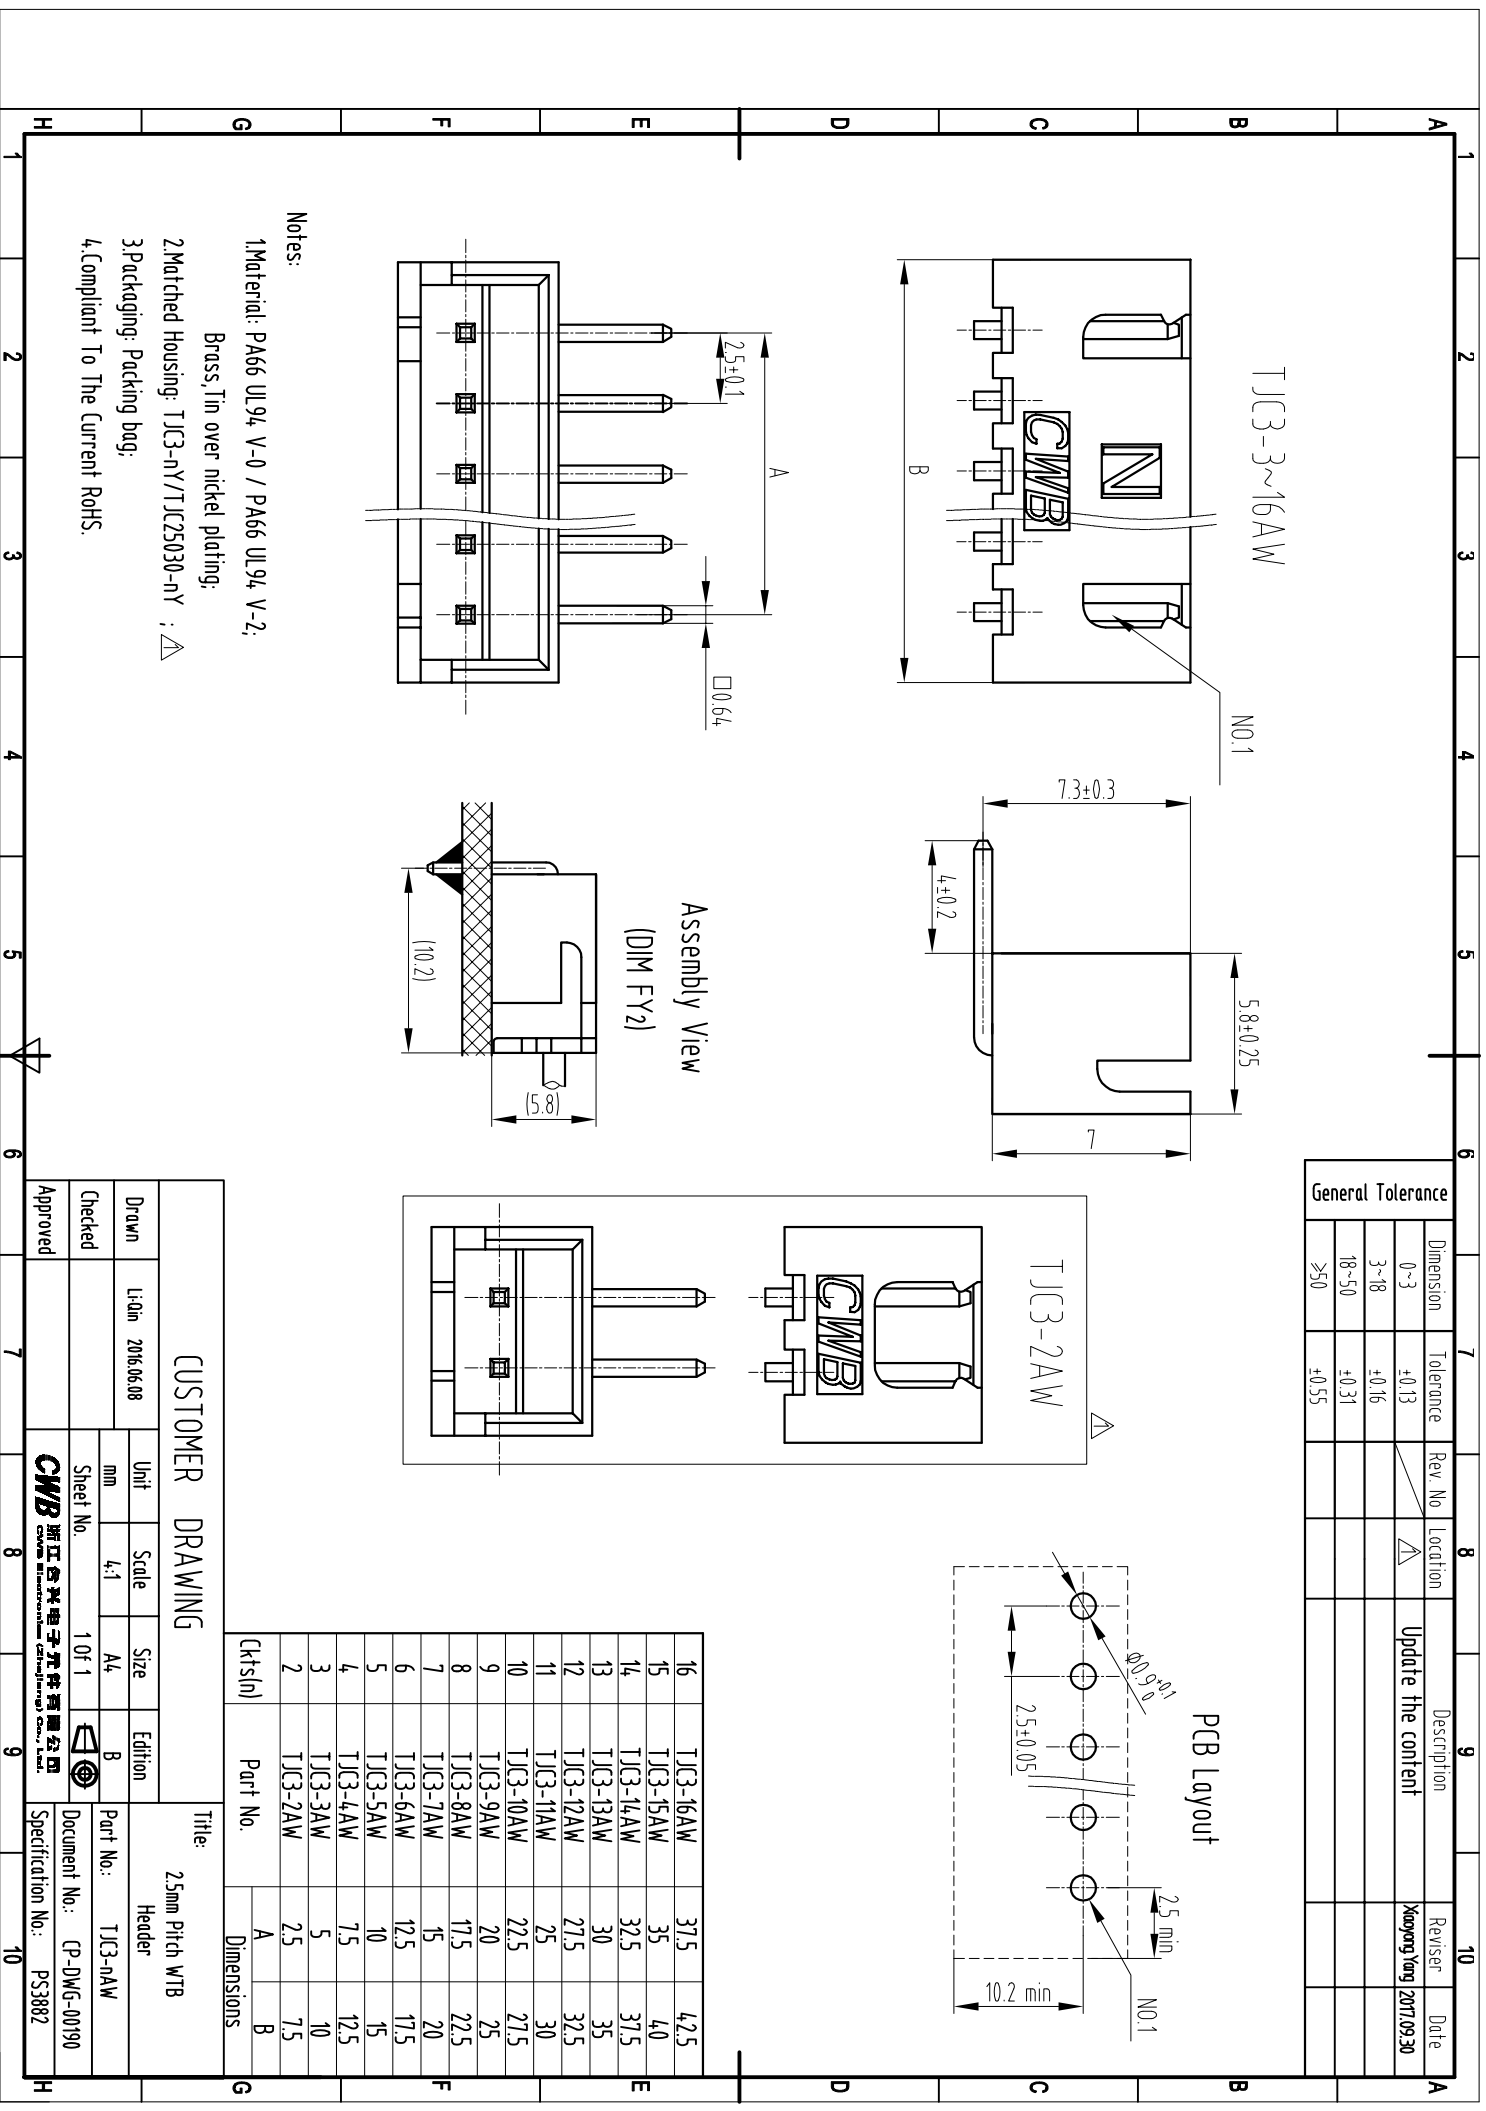

Dimension	Tolerance	Rev	Location	Description	Reviser	Date
0~3	±0.13			To update the content	Xiaoyang Yang	2017.09.30
3~18	±0.16					
18~50	±0.31					
≥50	±0.55					

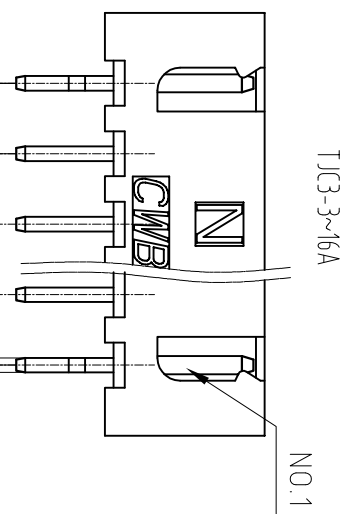

Assembly View
(DIM FY2)

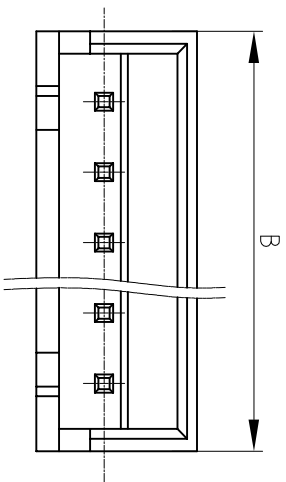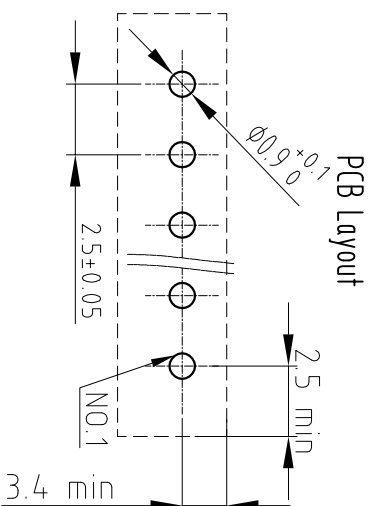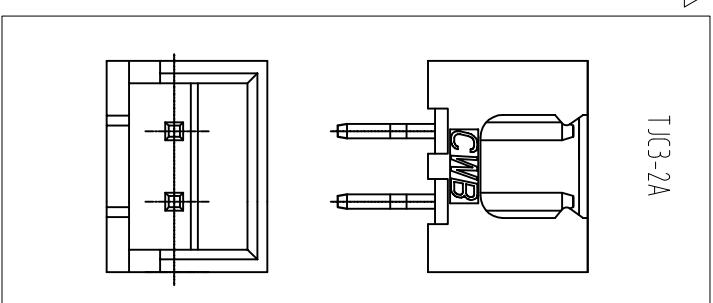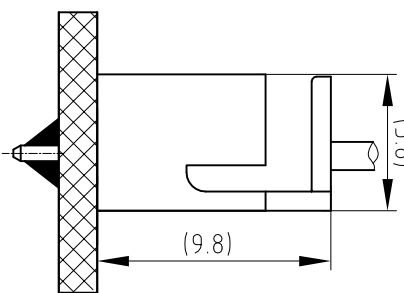

- Notes:
1. Material: PA66 UL94 V-0 / PA66 UL94 V-2 / PBT UL94 V-0 / PA6 UL94 V-0; Brass, Tin over nickel plating;
 2. Matched Housing: TJC3-nY/TJC25030-nY; △
 3. Packaging: Packing bag;
 4. Compliant To The Current RoHS.

Part No.	Dimensions
16 TJC3-16A	37.5 42.5
15 TJC3-15A	35 4.0
14 TJC3-14A	32.5 37.5
13 TJC3-13A	30 35
12 TJC3-12A	27.5 32.5
11 TJC3-11A	25 30
10 TJC3-10A	22.5 27.5
9 TJC3-9A	20 25
8 TJC3-8A	17.5 22.5
7 TJC3-7A	15 20
6 TJC3-6A	12.5 17.5
5 TJC3-5A	10 15
4 TJC3-4A	7.5 12.5
3 TJC3-3A	5 10
2 TJC3-2A	2.5 7.5







CUSTOMER DRAWING

Title: 2.5mm Pitch WTB Header

Drawn	Li Qin	2016.06.08	Unit	mm	Scale	4:1	Size	A4	Edition	B	Part No.:	TJC3-11A
Checked			Sheet No.	1 of 1							Document No.:	GP-DWG-00191
Approved			CWB		浙江合兴电子有限公司 CWB Electronics (Zhejiang) Co., Ltd.						Specification No.:	PS3882

General Tolerance				Revision		Date	
Dimension	Tolerance	Rev. No	Location	Reviser	Date		
0~3	±0.13			Xuoyong Yang	2017.09.30		
3~18	±0.16						
18~50	±0.31						
≥50	±0.55						

TJC3-3~16AD

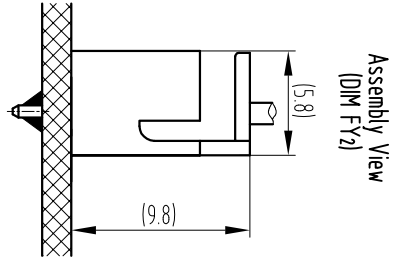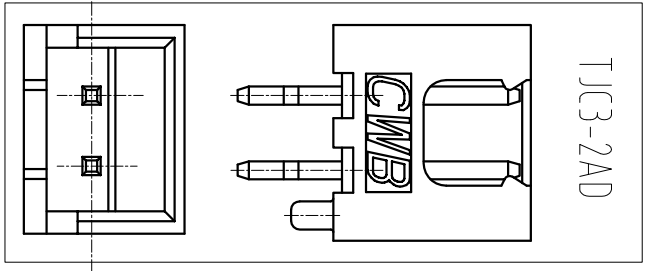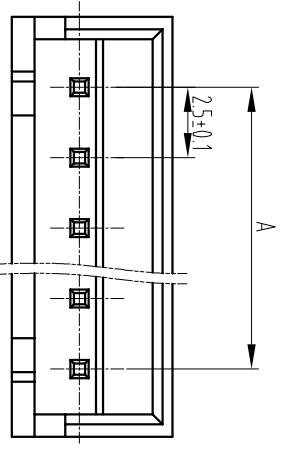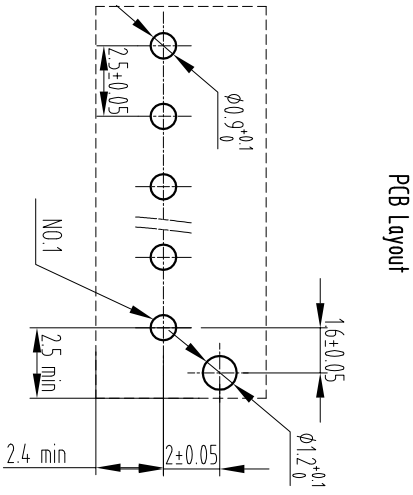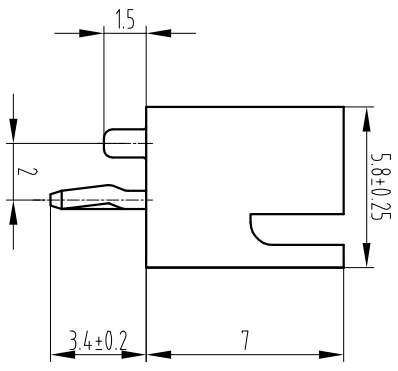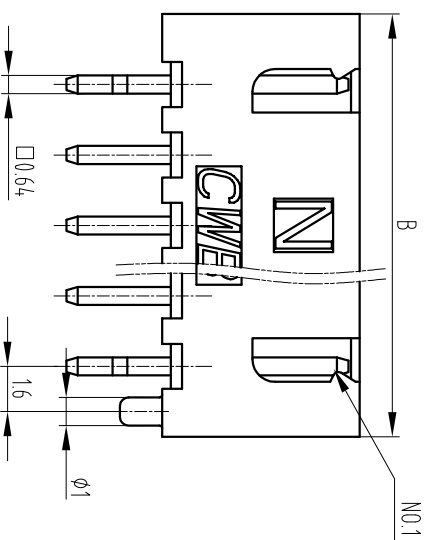

Part No.	Dimensions
16	TJC3-16AD 37.5 42.5
15	TJC3-15AD 35 40
14	TJC3-14AD 32.5 37.5
13	TJC3-13AD 30 35
12	TJC3-12AD 27.5 32.5
11	TJC3-11AD 25 30
10	TJC3-10AD 22.5 27.5
9	TJC3-9AD 20 25
8	TJC3-8AD 17.5 22.5
7	TJC3-7AD 15 20
6	TJC3-6AD 12.5 17.5
5	TJC3-5AD 10 15
4	TJC3-4AD 7.5 12.5
3	TJC3-3AD 5 10
2	TJC3-2AD 2.5 7.5




- Notes:
1. Material: PA66 UL94 V-0 / PA66 UL94 V-2;
 2. Matched Housing: TJC3-nY/TJC25030-nY; ▲
 3. Packaging: Packing bag;
 4. Compliant To The Current RoHS.

CUSTOMER DRAWING
Title: 2.5mm Pitch WTB Header




Drawn	LiQin	2016.06.08	Unit	mm	Scale	4:1	Size	A4	Edition	B	Part No.:	TJC3-nAD
Checked			Sheet No.								Document No.:	CP-DWG-00192
Approved											Specification No.:	PS3082



General Tolerance				7	8	9	10
Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date	
0~3	±0.13		△	To update the content	Xuanyong Yang	2017/09/30	
3~18	±0.16						
18~50	±0.31						
≥50	±0.55						

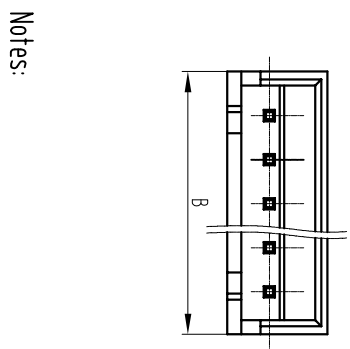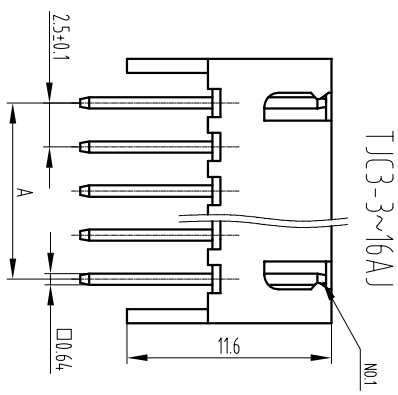

Assembly View
(DIM FY2)

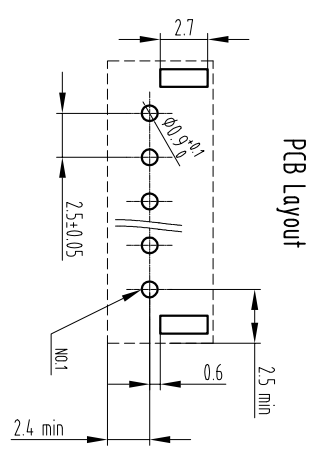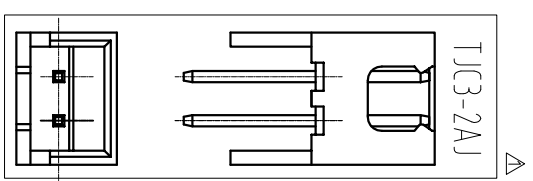



Part No.	Dimensions
16	TJC3-16AJ 37.5 42.5
15	TJC3-15AJ 35 4.0
14	TJC3-14AJ 32.5 37.5
13	TJC3-13AJ 30 35
12	TJC3-12AJ 27.5 32.5
11	TJC3-11AJ 25 30
10	TJC3-10AJ 22.5 27.5
9	TJC3-9AJ 20 25
8	TJC3-8AJ 17.5 22.5
7	TJC3-7AJ 15 20
6	TJC3-6AJ 12.5 17.5
5	TJC3-5AJ 10 15
4	TJC3-4AJ 7.5 12.5
3	TJC3-3AJ 5 10
2	TJC3-2AJ 2.5 7.5


- Notes:
1. Material: PA66 UL94 V-2 / PA66 UL94 V-0;
Brass, Tin over nickel plating;
 2. Matched Housing: TJC3-nY/TJC25030-nY; △
 3. Packaging: Packing bag;
 4. Compliant To The Current RoHS.

CUSTOMER DRAWING				Title: 2.5mm Pitch WTB Header	
Drawn	Li Qin 2016.06.08	Unit	mm	Scale	2.5:1
Checked		Sheet No.	1 of 1	Size	A4
Approved		Part No.	TJC3-nAJ	Revision	B
			Document No.	CP-DWG-00193	
			Specification No.	PS3082	



General Tolerance			
Dimension	Tolerance	Rev. No	Location
0~3	±0.13		
3~18	±0.16		
18~50	±0.31		
≥50	±0.55		

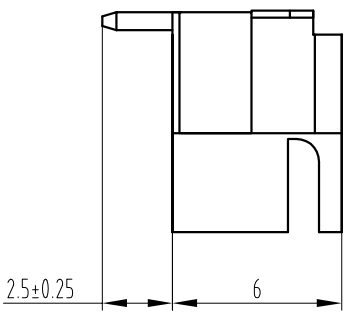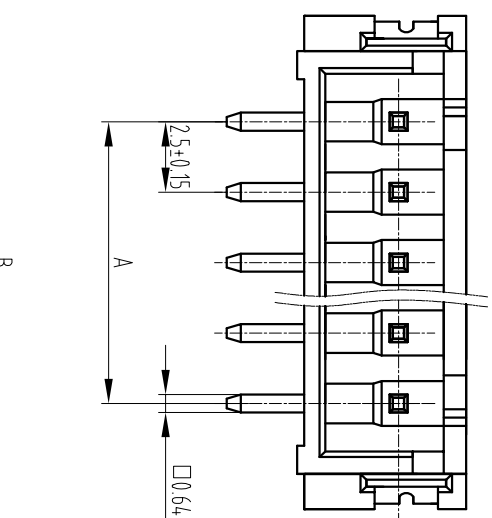

Assembly View
(DIM FV2)

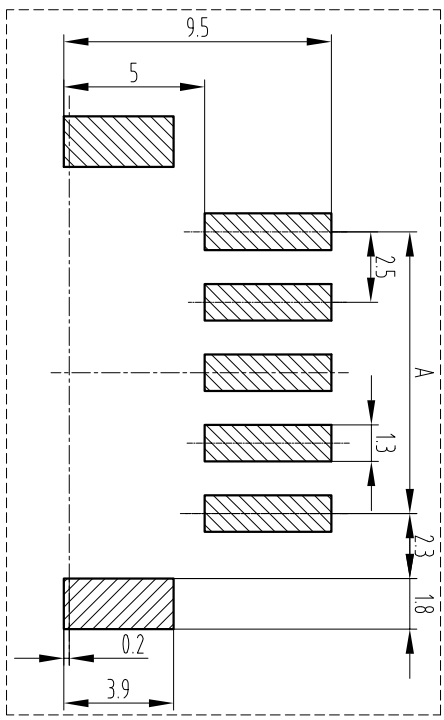

PCB Layout

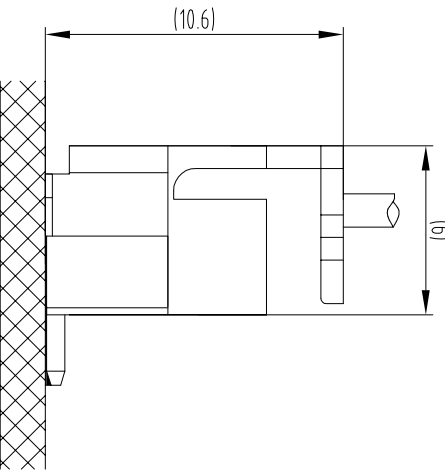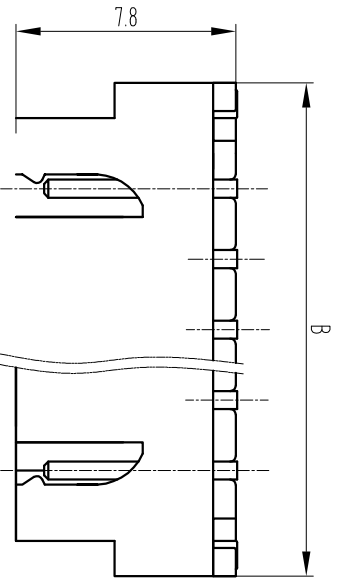

Notes:

- 1.Material: LCP UL94 V-0 ;
- Brass, Tin plating;
- Phosphor bronze, Tin plating;
- 2.Matched Housing: TJC3-nY/TJC25030-nY ;
- 3.Packaging: Packing bag;
- 4.Compliant To The Current RoHS.






	Part No.	Dimensions
16	TJC3-16AB	37.5 4.5
15	TJC3-15AB	35 4.25
14	TJC3-14AB	32.5 4.0
13	TJC3-13AB	30 3.75
12	TJC3-12AB	27.5 3.5
11	TJC3-11AB	25 3.25
10	TJC3-10AB	22.5 3.0
9	TJC3-9AB	20 2.75
8	TJC3-8AB	17.5 2.5
7	TJC3-7AB	15 2.25
6	TJC3-6AB	12.5 2.0
5	TJC3-5AB	10 1.75
4	TJC3-4AB	7.5 1.5
3	TJC3-3AB	5 1.25
2	TJC3-2AB	2.5 1.0
		A
		B

CUSTOMER DRAWING

Title: 2.5mm Pitch WTB Header

Drawn	Liqin 2016.06.08	Unit	mm	Scale	4:1	Size	A4	Edition	B	Part No.:	TJC3-nAB
Checked	Guoying Wang 2016.06.18	Sheet No.	1 OF 1		CWB 浙江合兴电子元件有限公司 CWB Electronics Co., Ltd.		Document No.:	CP-DWG-00102			
Approved	Dongxuliu 2016.06.22	Specification No.:		PS3082							

General Tolerance		Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
0~3	±0.13					To update the content	Xiaoyong Yang	2017.09.30
3~18	±0.16							
18~50	±0.31							
≥50	±0.55							

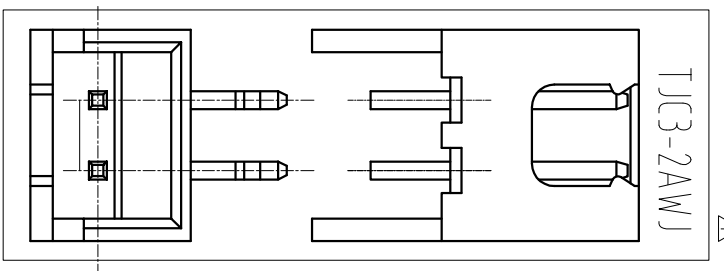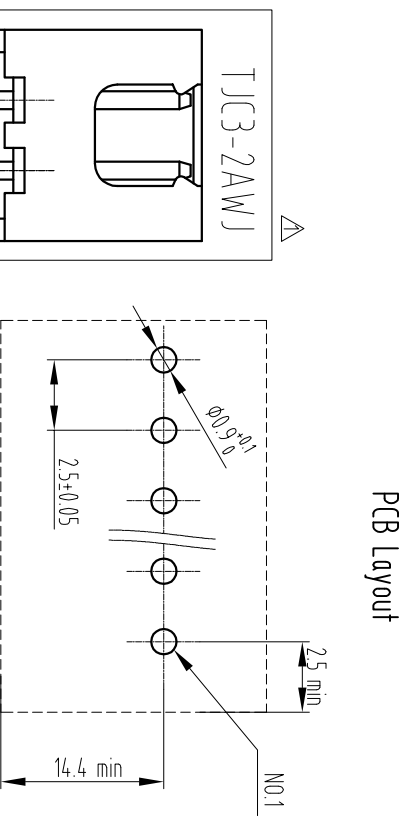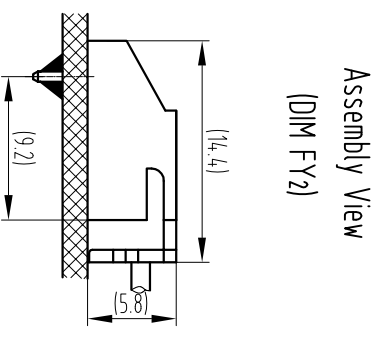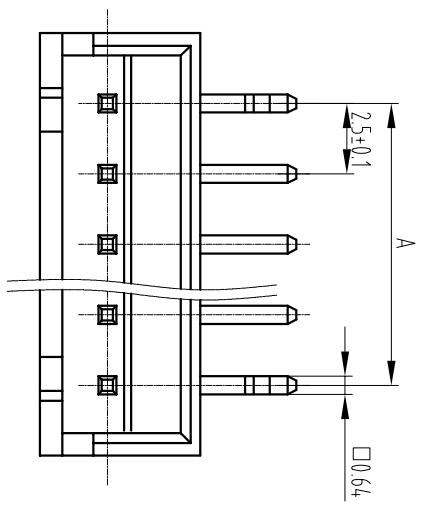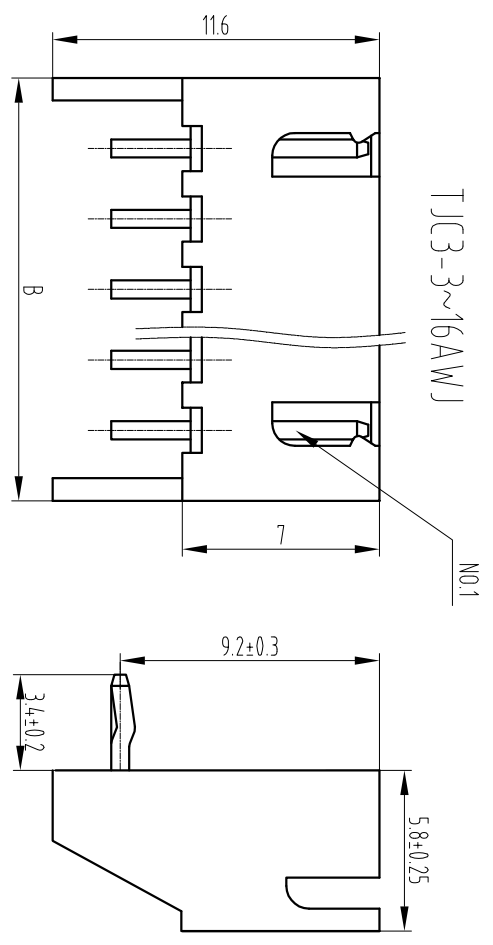

No.	Part No.	Dimensions
16	TJ(C3-16AWJ)	37.5 42.5
15	TJ(C3-15AWJ)	35 40
14	TJ(C3-14AWJ)	32.5 37.5
13	TJ(C3-13AWJ)	30 35
12	TJ(C3-12AWJ)	27.5 32.5
11	TJ(C3-11AWJ)	25 30
10	TJ(C3-10AWJ)	22.5 27.5
9	TJ(C3-9AWJ)	20 25
8	TJ(C3-8AWJ)	17.5 22.5
7	TJ(C3-7AWJ)	15 20
6	TJ(C3-6AWJ)	12.5 17.5
5	TJ(C3-5AWJ)	10 15
4	TJ(C3-4AWJ)	7.5 12.5
3	TJ(C3-3AWJ)	5 10
2	TJ(C3-2AWJ)	2.5 7.5

Notes:
 1.Material: PA66 UL94 V-0 / PA66 UL94 V-2 / PBT UL94 V-0;
 Brass, Tin over nickel plating;
 2.Matched Housing: TJ(C3-n)/TJ(C25030-n)Y; ▲
 3.Packaging: Packing bag;
 4.Compliant To The Current RoHS.



CUSTOMER DRAWING

Drawn	LiQin	2016.06.08	Unit	mm	Scale	4:1	Size	A4	Edition	B	Part No.:	TJ(C3-nAWJ)
Checked			Sheet No.								Document No.:	CP-DWG-00236
Approved											Specification No.:	PS3082


CWB 浙江合兴电子元件有限公司
 CWB Electronics (Zhejiang) Co., Ltd.

Title: 2.5mm Pitch 90° WTB Header



General Tolerance			
Dimension	Tolerance	Rev. No	Location
0~3	±0.13		
3~18	±0.16		
18~50	±0.31		
≥50	±0.55		

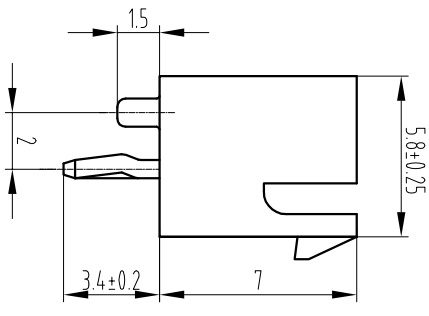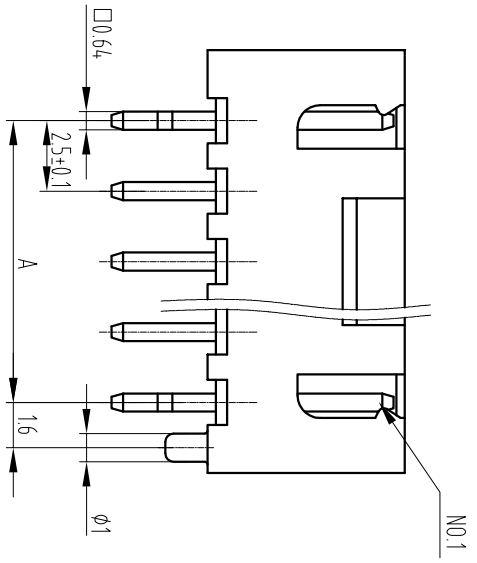

Assembly View
(DIM FY2)

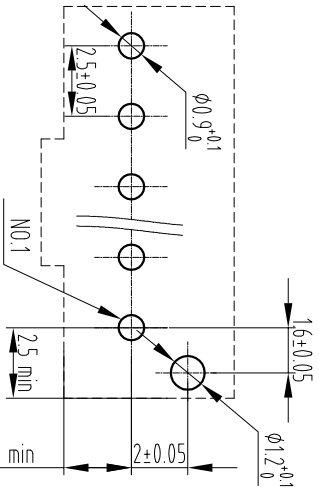

PCB Layout

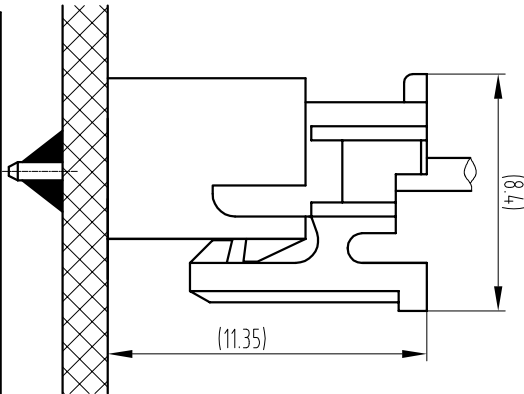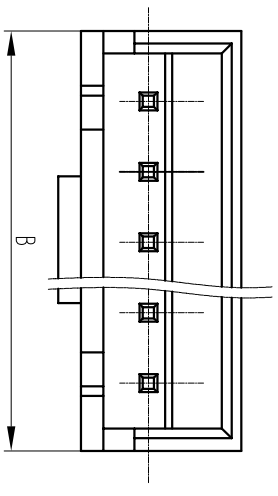

16	TJC3-16ADS	37.5	42.5
15	TJC3-15ADS	35	40
14	TJC3-14ADS	32.5	37.5
13	TJC3-13ADS	30	35
12	TJC3-12ADS	27.5	32.5
11	TJC3-11ADS	25	30
10	TJC3-10ADS	22.5	27.5
9	TJC3-9ADS	20	25
8	TJC3-8ADS	17.5	22.5
7	TJC3-7ADS	15	20
6	TJC3-6ADS	12.5	17.5
5	TJC3-5ADS	10	15
4	TJC3-4ADS	7.5	12.5
3	TJC3-3ADS	5	10
	Part No.	A	B
	Dimensions		

Notes:








1. Material: PA66 UL94-V-0 / PA66 UL94-V-2;
Brass, Tin over nickel plating;
2. Matched Housing: TJC25030-nY;
3. Packaging: Packing bag;
4. Compliant To The Current RoHS.

CUSTOMER DRAWING

Title: 2.5mm Pitch WTB header

Drawn	LiQin	2016.06.08	Unit	mm	Scale	4:1	Size	A4	Edition	B	Part No.:	TJC3-nADS
Checked	Guoying Wang	2016.06.18	Sheet No.	1 OF 1		1 OF 1		1 OF 1		Document No.:	CP-DWG-00238	
Approved	Dongxuliu	2016.06.22	CWB 浙江合兴电子元件有限公司		CWB ELECTRONIC COMPONENTS CO., LTD.		Specification No.:		PS3882			

General Tolerance			
Dimension	Tolerance	Rev	Location
0~3	±0.13		
3~18	±0.16		
18~50	±0.31		
≥50	±0.55		

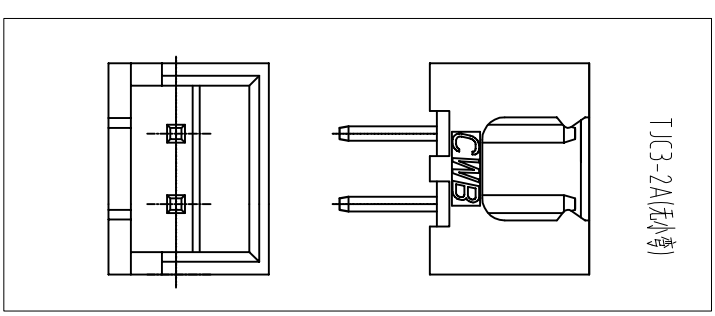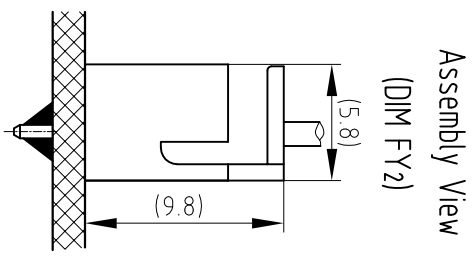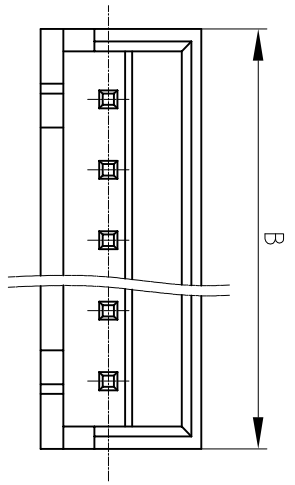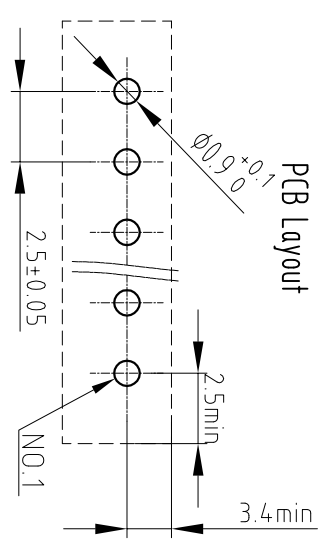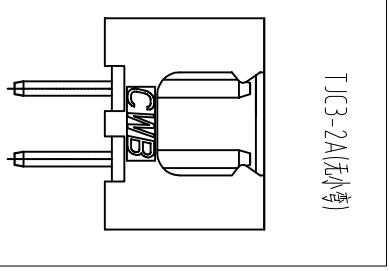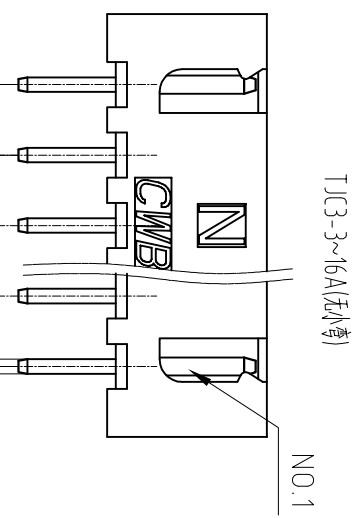

16	TJC3-16A(无小弯)	37.5	42.5
15	TJC3-15A(无小弯)	35	4.0
14	TJC3-14A(无小弯)	32.5	37.5
13	TJC3-13A(无小弯)	30	35
12	TJC3-12A(无小弯)	27.5	32.5
11	TJC3-11A(无小弯)	25	30
10	TJC3-10A(无小弯)	22.5	27.5
9	TJC3-9A(无小弯)	20	25
8	TJC3-8A(无小弯)	17.5	22.5
7	TJC3-7A(无小弯)	15	20
6	TJC3-6A(无小弯)	12.5	17.5
5	TJC3-5A(无小弯)	10	15
4	TJC3-4A(无小弯)	7.5	12.5
3	TJC3-3A(无小弯)	5	10
2	TJC3-2A(无小弯)	2.5	7.5
Ckts(In)	Part No.	A	B
		Dimensions	




- Notes:
1. Material: PA66 UL94 V-0 / PA66 UL94 V-2 / PBT UL94 V-0 / PA6 UL94 V-0; Brass, Tin over nickel plating;
 2. Matched Housing: TJC3-nY/TJC25030-nY;
 3. Packaging: Packing bag;
 4. Compliant To The Current RoHS.

CUSTOMER DRAWING




Title: 2.5mm Pitch WTB Header

Drawn	Xinyong Yang 2017.09.30	Unit	mm	Scale	5:1	Size	A4	Edition	B	Part No.:	TJC3-nA(无小弯)
Checked		Sheet No.:	1 of 1							Document No.:	CP-DWG-00556
Approved		 CWB 浙江合兴电子元件有限公司 CWB Electronics (Zhejiang) Co., Ltd.								Specification No.:	PS3882

General Tolerance		Dimension	Tolerance	Rev. No.	Location	Description	Reviser	Date
0~3	±0.13				△	To update the content	Xiangyang Kong	2017.09.30
3~18	±0.16							
18~50	+0.31							
>50	+0.55							

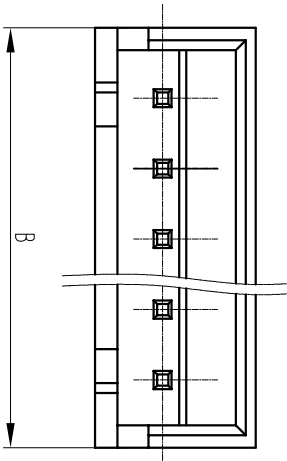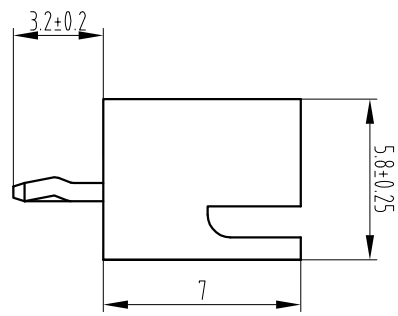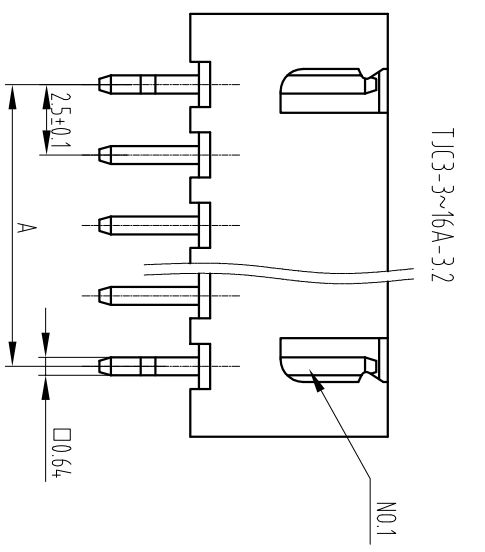

Assembly View
(DIM FV2)

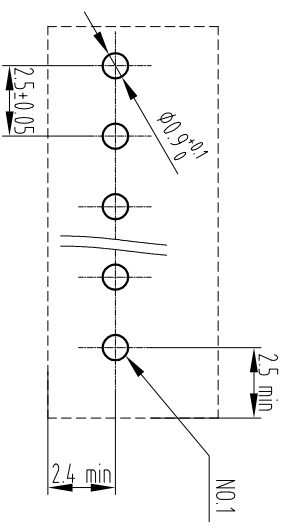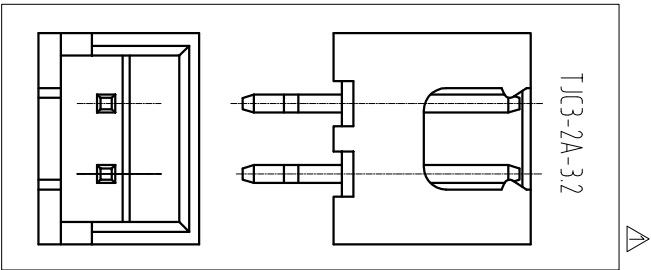

PCB Layout

16	TJC3-16A-3.2	37.5	42.5
15	TJC3-15A-3.2	35	40
14	TJC3-14A-3.2	32.5	37.5
13	TJC3-13A-3.2	30	35
12	TJC3-12A-3.2	27.5	32.5
11	TJC3-11A-3.2	25	30
10	TJC3-10A-3.2	22.5	27.5
9	TJC3-9A-3.2	20	25
8	TJC3-8A-3.2	17.5	22.5
7	TJC3-7A-3.2	15	20
6	TJC3-6A-3.2	12.5	17.5
5	TJC3-5A-3.2	10	15
4	TJC3-4A-3.2	7.5	12.5
3	TJC3-3A-3.2	5	10
2	TJC3-2A-3.2	2.5	7.5
	Ckts(In)	Part No.	Dimensions
			A
			B

Notes:





1. Material: PA66 UL94 V-0 / PA66 UL94 V-2 / PA6 UL94 V-0;
Brass, Tin over nickel plating
2. Matched Housing: TJC3-nY/TJC25030-nY; △
3. Packaging: Packing bag;
4. Compliant To The Current RoHS.

CUSTOMER DRAWING

Title: 25mm Pitch WTB Header

Drawn	LiJin	2016.06.08	Unit	mm	Scale	4:1	Size	A4	Edition	B	Part No.	TJC3-16A-3.2
Checked			Sheet No.	1 of 1							Document No.	CP-DWG-00237
Approved			 浙江睿兴电子有限公司 CWB Electronics (Zhejiang Ruixing Electronics Co., Ltd.)								Specification No.	PS3882

General Tolerance		Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
0~3	±0.13					To update the content	Xueyong Yang	2017.09.30
3~18	±0.16							
18~50	±0.31							
≥50	±0.55							

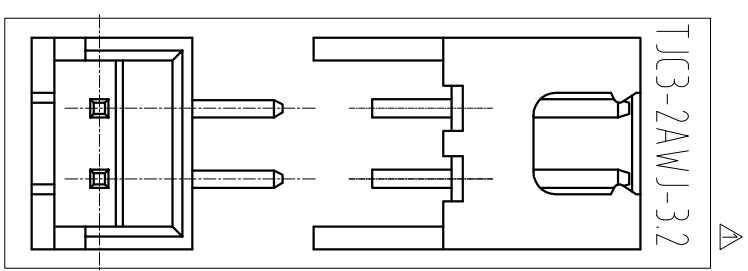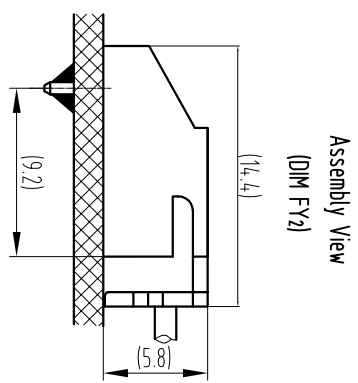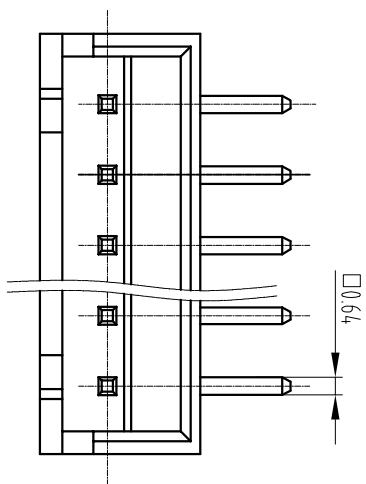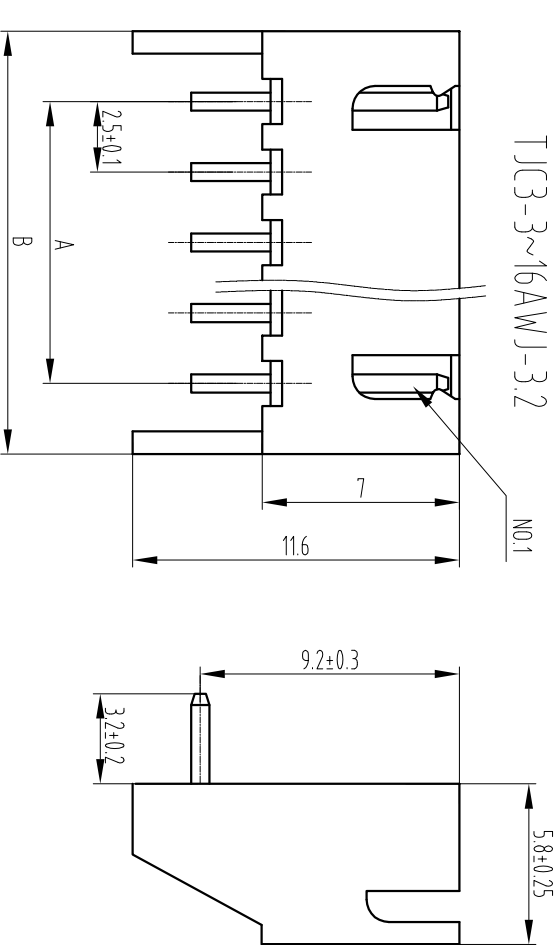

Part No.	Part No.	Dimensions
16	TJC-16AWJ-3.2	37.5 42.5
15	TJC-15AWJ-3.2	35 4.0
14	TJC-14AWJ-3.2	32.5 37.5
13	TJC-13AWJ-3.2	30 35
12	TJC-12AWJ-3.2	27.5 32.5
11	TJC-11AWJ-3.2	25 30
10	TJC-10AWJ-3.2	22.5 27.5
9	TJC-9AWJ-3.2	20 25
8	TJC-8AWJ-3.2	17.5 22.5
7	TJC-7AWJ-3.2	15 20
6	TJC-6AWJ-3.2	12.5 17.5
5	TJC-5AWJ-3.2	10 15
4	TJC-4AWJ-3.2	7.5 12.5
3	TJC-3AWJ-3.2	5 10
2	TJC-2AWJ-3.2	2.5 7.5






- Notes:
1. Material: PA66 UL94, V-0 / PA66 UL94, V-2;
 2. Matched Housing: TJC-nY/TJC25030-nY; ▲
 3. Packaging: Packing bag;
 4. Compliant To The Current RoHS.

CUSTOMER DRAWING

Drawn	Li Qin	2016.06.08	Unit	mm	Scale	4:1	Size	A4	Edition	B	Part No.:	TJC-nAWJ-3.2
Checked			Sheet No.			1 Of 1					Document No.:	CP-DWG-00242
Approved			CWB 浙江众兴电子元件有限公司		CWB ELECTRONIC COMPONENTS CO., LTD.						Specification No.:	PS3082

Title: 2.5mm Pitch WTB Header

General Tolerance		Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
0~3	±0.13							
3~18	±0.16							
18~50	±0.31							
≥50	±0.55							

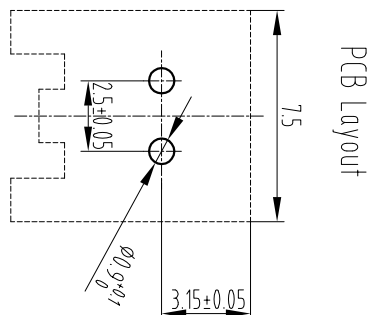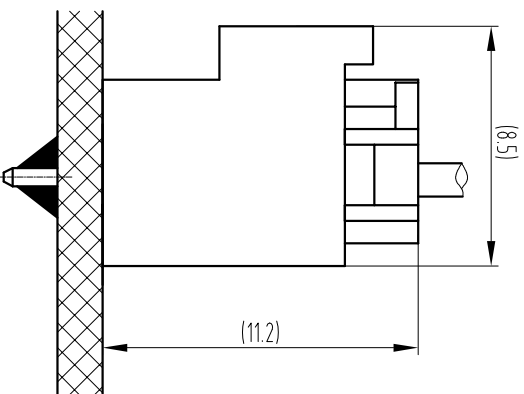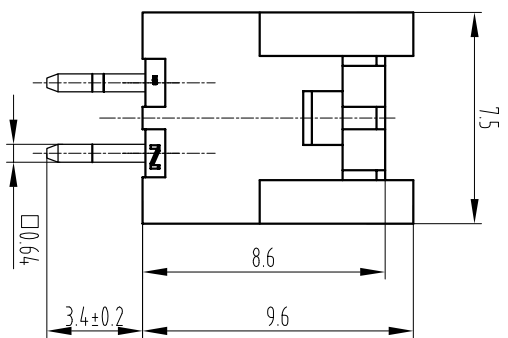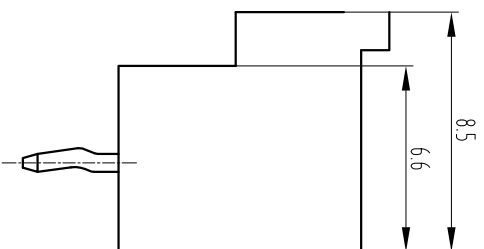


- Notes:
1. Material: PA66 UL94 V-2 / PA66 UL94 V-0;
Brass, Tin over nickel plating;
 2. Matched Housing: TJC25038-2Y;
 3. Packaging: Packing bag;
 4. Compliant To The Current RoHS.

CUSTOMER DRAWING


Title: 2.5mm Pitch WTB Header

Drawn	Liqin 2016.06.08	Unit	mm	Scale	4:1	Size	A4	Edition	B	Part No.:	TJC3-2ADS
Checked	Guoying Wang 2016.06.18	Sheet No.	1 OF 1	CWB 浙江鑫兴电子元件有限公司 CWB Electronics (China) Co., Ltd.		Document No.:		CP-DWG-00244	Specification No.:	PS3882	
Approved	Dongxuliu 2016.06.22										



General Tolerance				7	8	9	10
Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date	
0~3	±0.13						
3~18	±0.16						
18~50	±0.31						
≥50	±0.55						

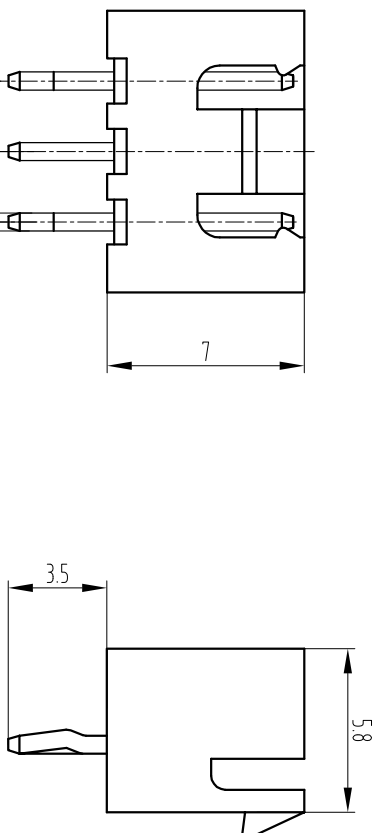

Assembly View
(DIM FY2)

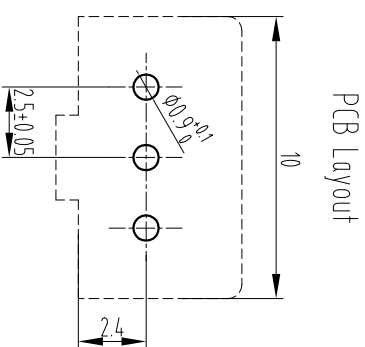

PCB Layout

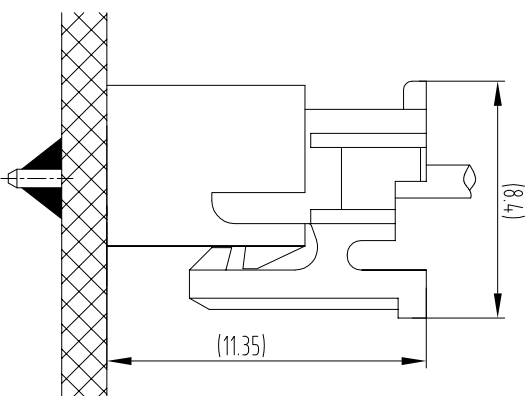

Notes:



- 1. Material: PA66 UL94 V-0;
- Brass, Tin over nickel plating;
- 2. Matched Housing: TJC25030-3Y;
- 3. Packaging: Packing bag;
- 4. Compliant To The Current RoHS.

CUSTOMER DRAWING



Title: 2.5mm Pitch WTB Header

Drawn	Liqin 2016.06.08	Unit	mm	Scale	4:1	Size	A4	Edition	B	Part No.:	TJC3-3AS
Checked	Guoying Wang 2016.06.18	Sheet No.	1 OF 1							Document No.:	CP-DWG-00240
Approved	Dongxuliu 2016.06.22	 CWB 浙江睿其电子有限公司 Zhejiang Ruqi Electronics Co., Ltd.								Specification No.:	PS3882

General Tolerance				Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
	0~3	±0.13								
	3~18	±0.16								
	18~50	±0.31								
	≥50	±0.55								

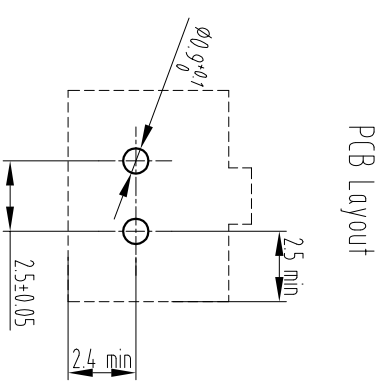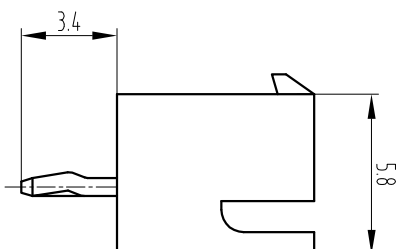




Assembly View
(DIM FY2)

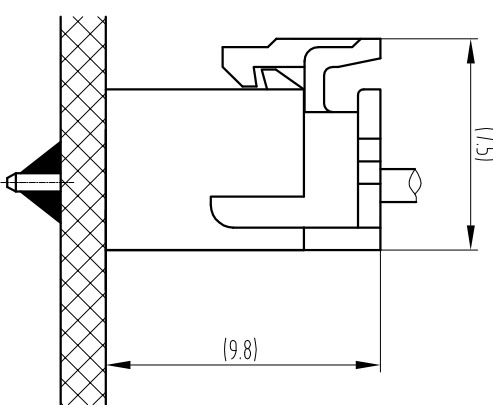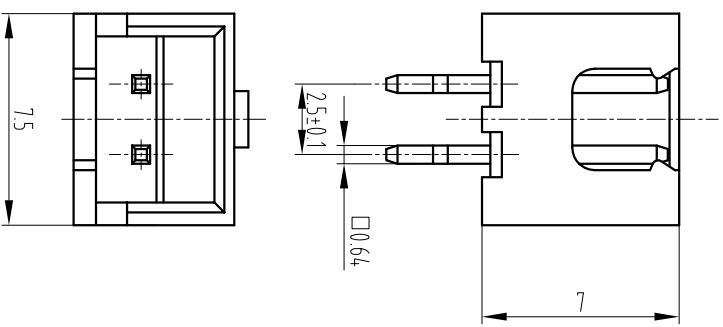

- Notes:
1. Material: PA66 UL94 V-2 / PA66 UL94 V-0;
Brass, Tin over nickel plating;
 2. Matched Housing: TJC3-2Y-S;
 3. Packaging: Packing bag;
 4. Compliant To The Current RoHS.

CUSTOMER DRAWING				Title:						
Drawn	Liqin	2016.06.08	Unit	Scale	Size	Edition	Part No.:	2.5mm Pitch WTB Header		
Checked	Guoying Wang	2016.06.18	mm	4:1	A4	B	Document No.:	CP-DWG-00239		
Approved	Dongxuliu	2016.06.22	Sheet No.	1 OF 1			Specification No.:	PS3882		
 浙江台兴电子元件有限公司 ZHEJIANG TAIXING ELECTRONIC COMPONENTS CO., LTD.										

General Tolerance				7	8	9	10
Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date	
0~3	±0.13						
3~18	±0.16						
18~50	±0.31						
≥50	±0.55						

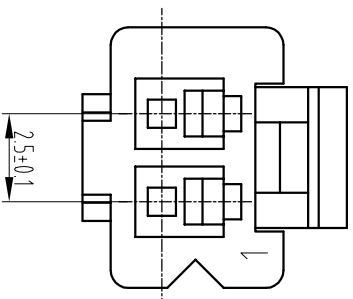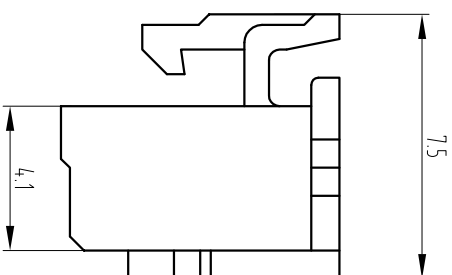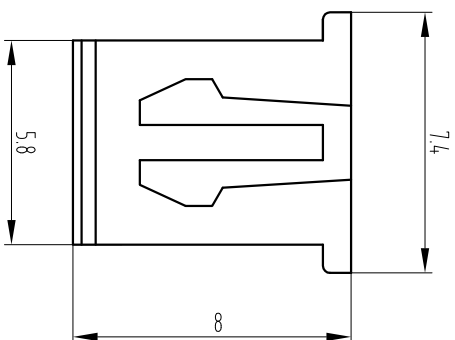


Notes:

1. Material: PA66 UL94 V-2 / PA66 UL94 V-0;
2. Matched Header: TJC3-2A-S;
3. Matched Contact: TJC3;
4. Packaging: Packing bag;
5. Compliant To The Current RoHS.

CUSTOMER DRAWING				Title:	
Drawn	Liqin 2016.06.08	Unit	mm	Scale	5:1
Checked	Guoying Wang 2016.06.18	Size	A4	Edition	B
Approved	Dongxuliu 2016.06.22	Sheet No.	1 OF 1	Part No.:	TJC3-2Y-S
				Document No.:	CP-DWG-00243
				Specification No.:	PS3882



General Tolerance		Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
	0~3	±0.13	△	C2	Update the content	Ruiwen.Gu	2018.9.22	
	3~18	±0.16						
	18~50	±0.31						
	≥50	±0.55						




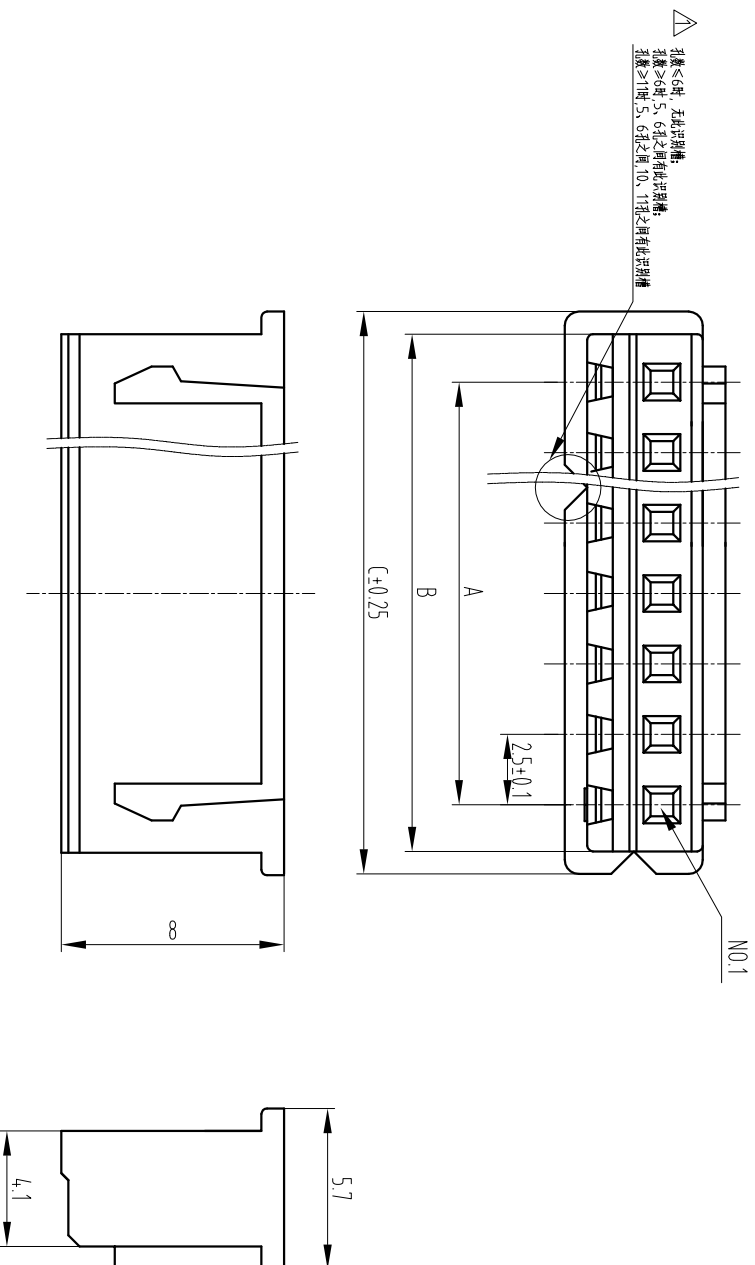


Notes:
 1.Material: PA66 UL94 V-0 / PA66 UL94 V-2 / PA6 UL94 V-0,
 2.Matched Header: TJC3 Series Header;
 3.Matched Contact: TJC3;
 4.Packaging: Packing bag;
 5.Compliant To The Current RoHS.

CUSTOMER DRAWING

Drawn		LiQin	2016.06.08	Unit	Scale	Size	Edition	Title:	
Checked		Guoying.Meng	2016.06.18	mm	4:1	A4	B	25mm Pitch WTB Housing	
Approved		Dongxuliu	2016.06.22	Sheet No.	1 OF 1			Part No.:	TJC3-1Y
				CWB 浙江合兴电子元件有限公司		CP-DWG-00194		Document No.:	
				CWB Electronics (Zhejiang) Co., Ltd.		PS3882		Specification No.:	

General Tolerance				Dimension	Tolerance	Rev No	Location	Description	Reviser	Date
	0~3	±0.13		△	To update the content			Xiaocong Yang	2017.10.10	
	3~18	±0.16								
	18~50	±0.31								
	≥50	±0.55								

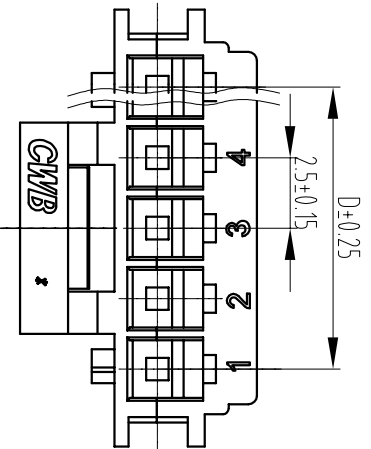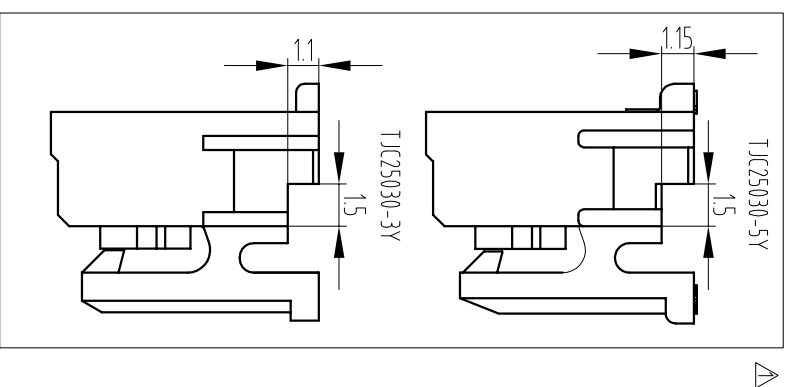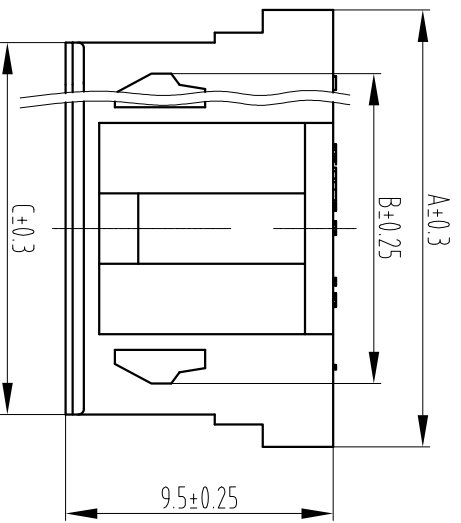

Part No.	Dimensions
9	TJC25030-9Y 25.5 21 23.2 20.0
8	TJC25030-8Y 23 18.5 20.7 17.5
7	TJC25030-7Y 20.5 16 18.2 15.0
6	TJC25030-6Y 18 13.5 15.7 12.5
5	TJC25030-5Y 15.5 10.8 13.2 10.0
4	TJC25030-4Y 13 8.5 10.7 7.5
3	TJC25030-3Y 10.4 6.1 8.2 5.0





CUSTOMER DRAWING

Drawn	Berjietu	2015.08.27	Unit	mm	Scale	1:1	Size	A4	Edition	B	Part No.	TJC25030-nY	Title:	25mm Pitch WTB Housing
Checked			Sheet No.	1 of 1							Document No.	CP-DWG-00041		
Approved											Specification No.	PS3858/PS3882		

- Notes:
- 1.Material: PA66 UL94 V-0 ;
 - 2.Matched Header: TJC3/TJC25025 Series Header;
 - 3.Matched Contact: TJC3;
 - 4.Packaging: Packing bag;
 - 5.Compliant To The Current RoHS.

H 1 2 3 4 5 6 7 8 9 10

General Tolerance		Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
0~3	±0.13					To update the content	Xiangyang	2017.09.30
3~18	±0.16					To update the content	Zhenfenghu	2017.09.30
18~50	±0.31							
≥50	±0.55							

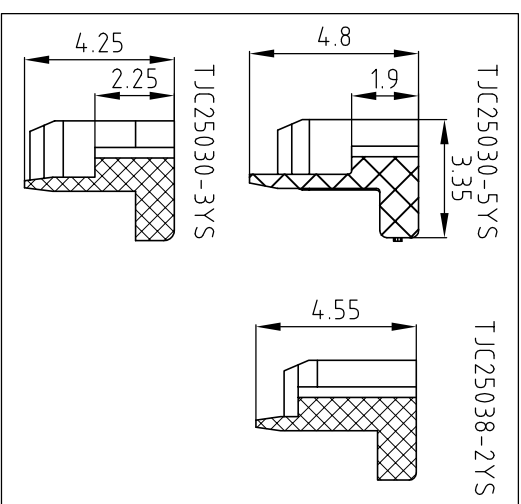

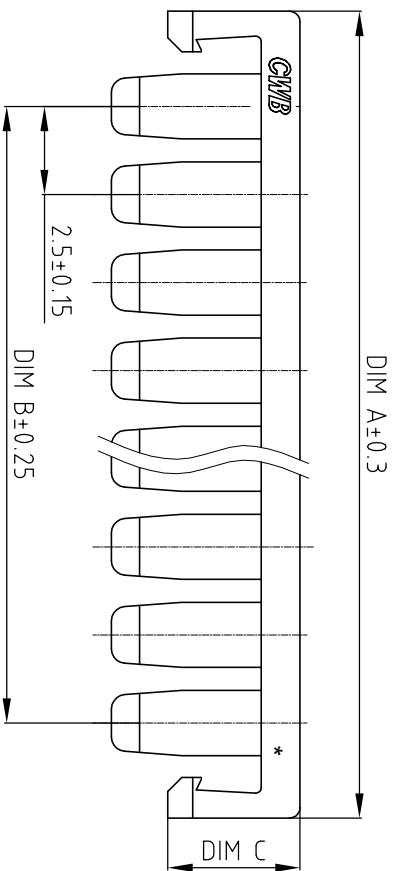
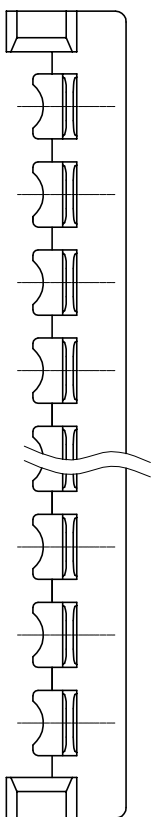


Ckts	Part No.	Dimensions		
		A	B	C
9	TJC25030-9YS	25.4	20.0	3.75
8	TJC25030-8YS	22.9	17.5	3.75
7	TJC25030-7YS	20.4	15.0	3.75
6	TJC25030-6YS	17.9	12.5	3.75
5	TJC25030-5YS	15.4	10.0	4
4	TJC25030-4YS	12.9	7.5	3.75
3	TJC25030-3YS	10.4	5.0	4.1
2	TJC25038-2YS	7.9	2.5	3.75



- Notes:
1. Material: PA66 UL94 V-0;
 2. Matched Housing: TJC25030-nY;
 3. Packaging: Packing bag;
 4. Compliant To The Current RoHS.

CUSTOMER DRAWING				Title:	
Drawn	Benjiehu 20150827	Unit	Scale	Size	Edition
Checked		mm	1:1	A4	B
Approved		Sheet No.	1 Of 1	Part No.: TJC25030-nYS Lock Plate	
 浙江合兴电子元件有限公司 CWB Electronics (Zhejiang) Co., Ltd.				Document No.:	CP-DWG-00044
				Specification No.:	PS3856/PS3802

General Tolerance		Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
	0~3	± 0.13			Δ	To update the content	Xuyong Yang	2017.10.10
	3~18	± 0.16			Δ	To update the Notes	Yadao Li	2018.7.21
	18~50	± 0.31			Δ	To update the Notes	Zhenfang Hu	2019.12
	≥ 50	± 0.55						

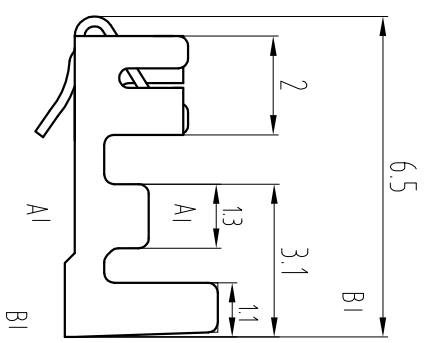

Contact View
1:2

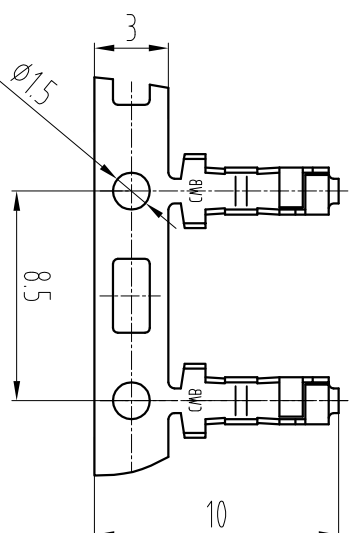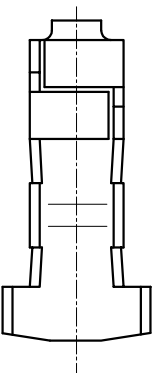

Notes:

1.Material: Phosphor bronze, Thickness=0.2mm;

2.Surface Finish: Tin Plating;

3.Matched Housing: TJC25030-nY/TJC3-nY/TJC25038-2Y
/TJC25057-nY/TJC25020-nY;

4.Conductor Size: TJC3 AWG22# AWG24#;
TJC3-1 AWG26#

5.Packaging: Paper disc;

6.Compliant To The Current RoHS.

CUSTOMER DRAWING

Title: 2.5mm Pitch WTB

Product Name: Contact

Product No.	Product Name	Remark	Drawn	Lingling Zhang	2016.3.10
422.6028.1	TJC3 Contact	Plating Before Stamping	Checked		
422.6269.0	TJC3 Contact	Stamping Before Plating	Approved		

Part No.	DIM A	DIM B	DIM C	DIM D
TJC3-1	175	13	25	2.1
TJC3	19	15	3	3.1

Unit: mm

Scale: 1:1

Size: A4

Edition: B2

Sheet No.: 1 of 1


Document No.: CP-DWG-00195

Specification No.: F5267/F5388/F5389/F5390/F5391/F5392/F5393/F5394/F5395/F5396/F5397/F5398/F5399


CWB 浙江台兴电子有限公司
CWB Electronics (Zhejiang) Co., Ltd.

General Tolerance		Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
0~3	±0.13				To update the content	kaoyong yao	2017.10.10	
3~18	±0.16							
18~50	±0.31							
≥50	±0.55							

Packing bag

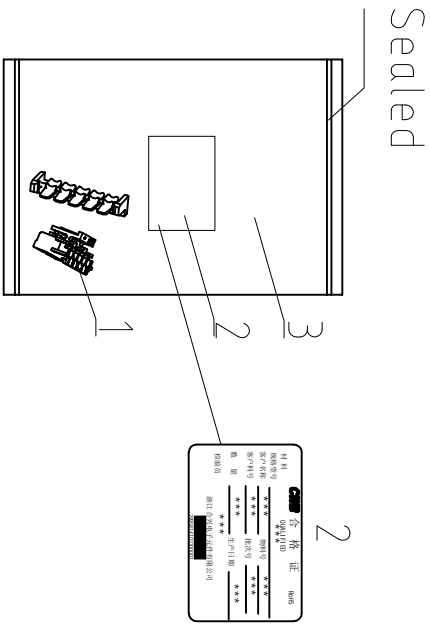


Packing box

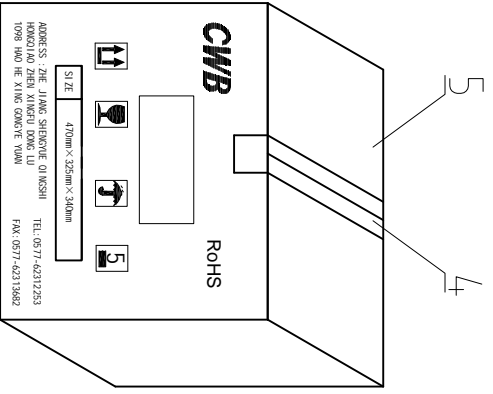

Number	Designation	Part No.	Pcs/bag	Remarks	Part No.	Pcs/bag	Remarks
1	TJC25030-nY/nYS Series	TJC25038-2Y	1000		TJC25030-9YS	1000	
2	Certification	TJC25030-3Y	1000		TJC25030-8YS	1000	
3	Packing bag	TJC25030-4Y	1000		TJC25030-7YS	1000	
4	Gummed tape	TJC25030-6Y	1000		TJC25030-6YS	1000	
5	Packing box	TJC25030-7Y	1000		TJC25030-5YS	1000	

CUSTOMER DRAWING



Drawn	Berjietu	2015.08.27	Unit	mm	Scale	/	Size	A4	Edition	B	Part No.:	TJC25030-nY/nYS
Checked			Sheet No.	1	Of	1	Title:		Packaging Specification of 2.5mm Pitch WTB Housing			
Approved			CWB 浙江合兴电子元件有限公司		CWB Electronics (Zhejiang) Co., Ltd.		Document No.:	BZ-DWG-00049		Specification No.:	PS3858/PS3887	

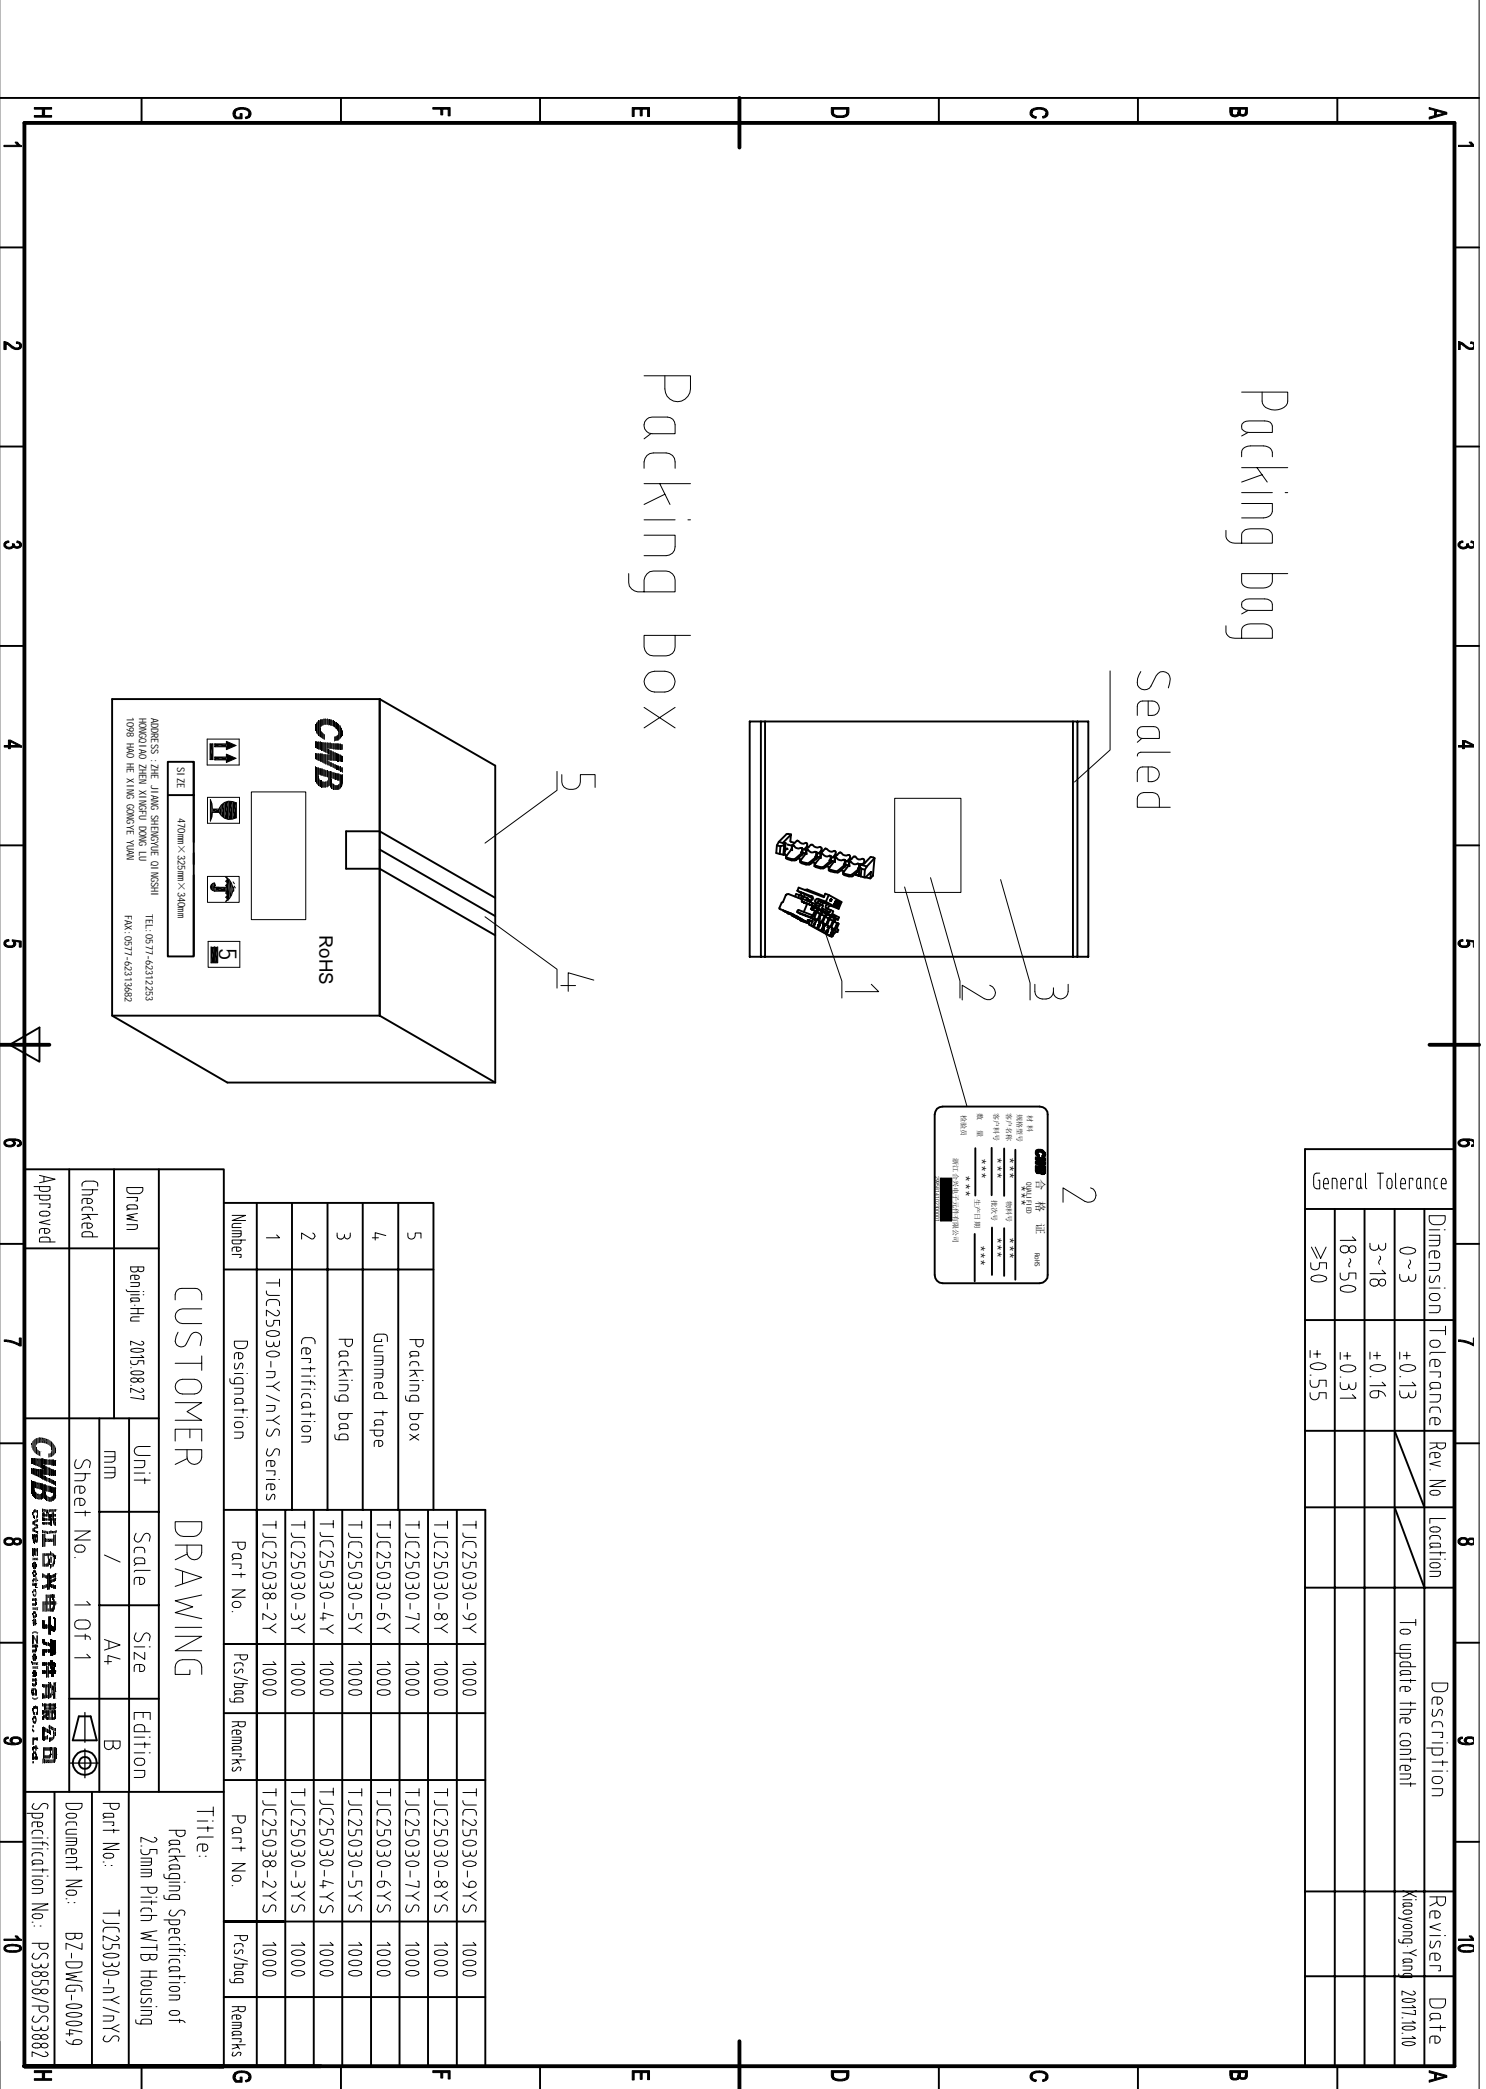


Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
0~3	±0.13			To update the content	Xinyong Yang	2017.10.10
3~18	±0.16					
18~50	±0.31					
≥50	±0.55					

Packing bag

Sealed

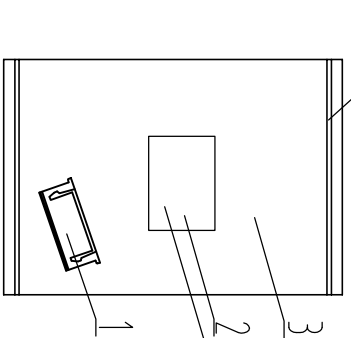


Packing box

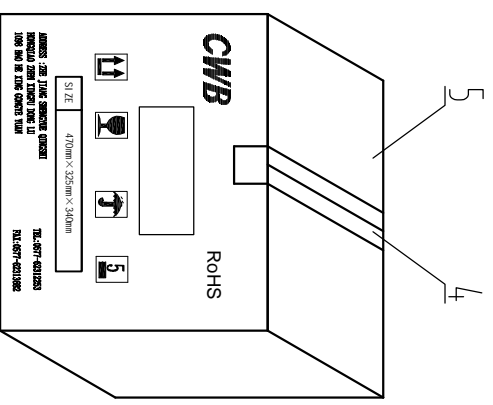

Number	Designation	Part No.	Pcs/bag	Remarks
1	TJ3 Series Housing	TJ3-2Y	1000	
2	Certificate	TJ3-3Y	1000	
3	Packing bag	TJ3-4Y	1000	
4	Gummed tape	TJ3-5Y	1000	
5	Packing box	TJ3-6Y	1000	
		TJ3-7Y	1000	
		TJ3-8Y	1000	
		TJ3-9Y	1000	
		TJ3-10Y	1000	
		TJ3-11Y	1000	
		TJ3-12Y	1000	
		TJ3-13Y	1000	
		TJ3-14Y	1000	
		TJ3-15Y	1000	
		TJ3-16Y	1000	



CUSTOMER DRAWING

Title: Packaging Specification of 25mm Pitch WTB Housing	
Drawn: L10in 2016.06.08	Unit: mm
Checked:	Scale: /
Approved:	Size: A4
	Edition: B
Sheet No.: 1 OF 1	
Part No.: TJ3-nY	
Document No.: BZ-DWG-00131	
Specification No.: PS3082/PS3975	

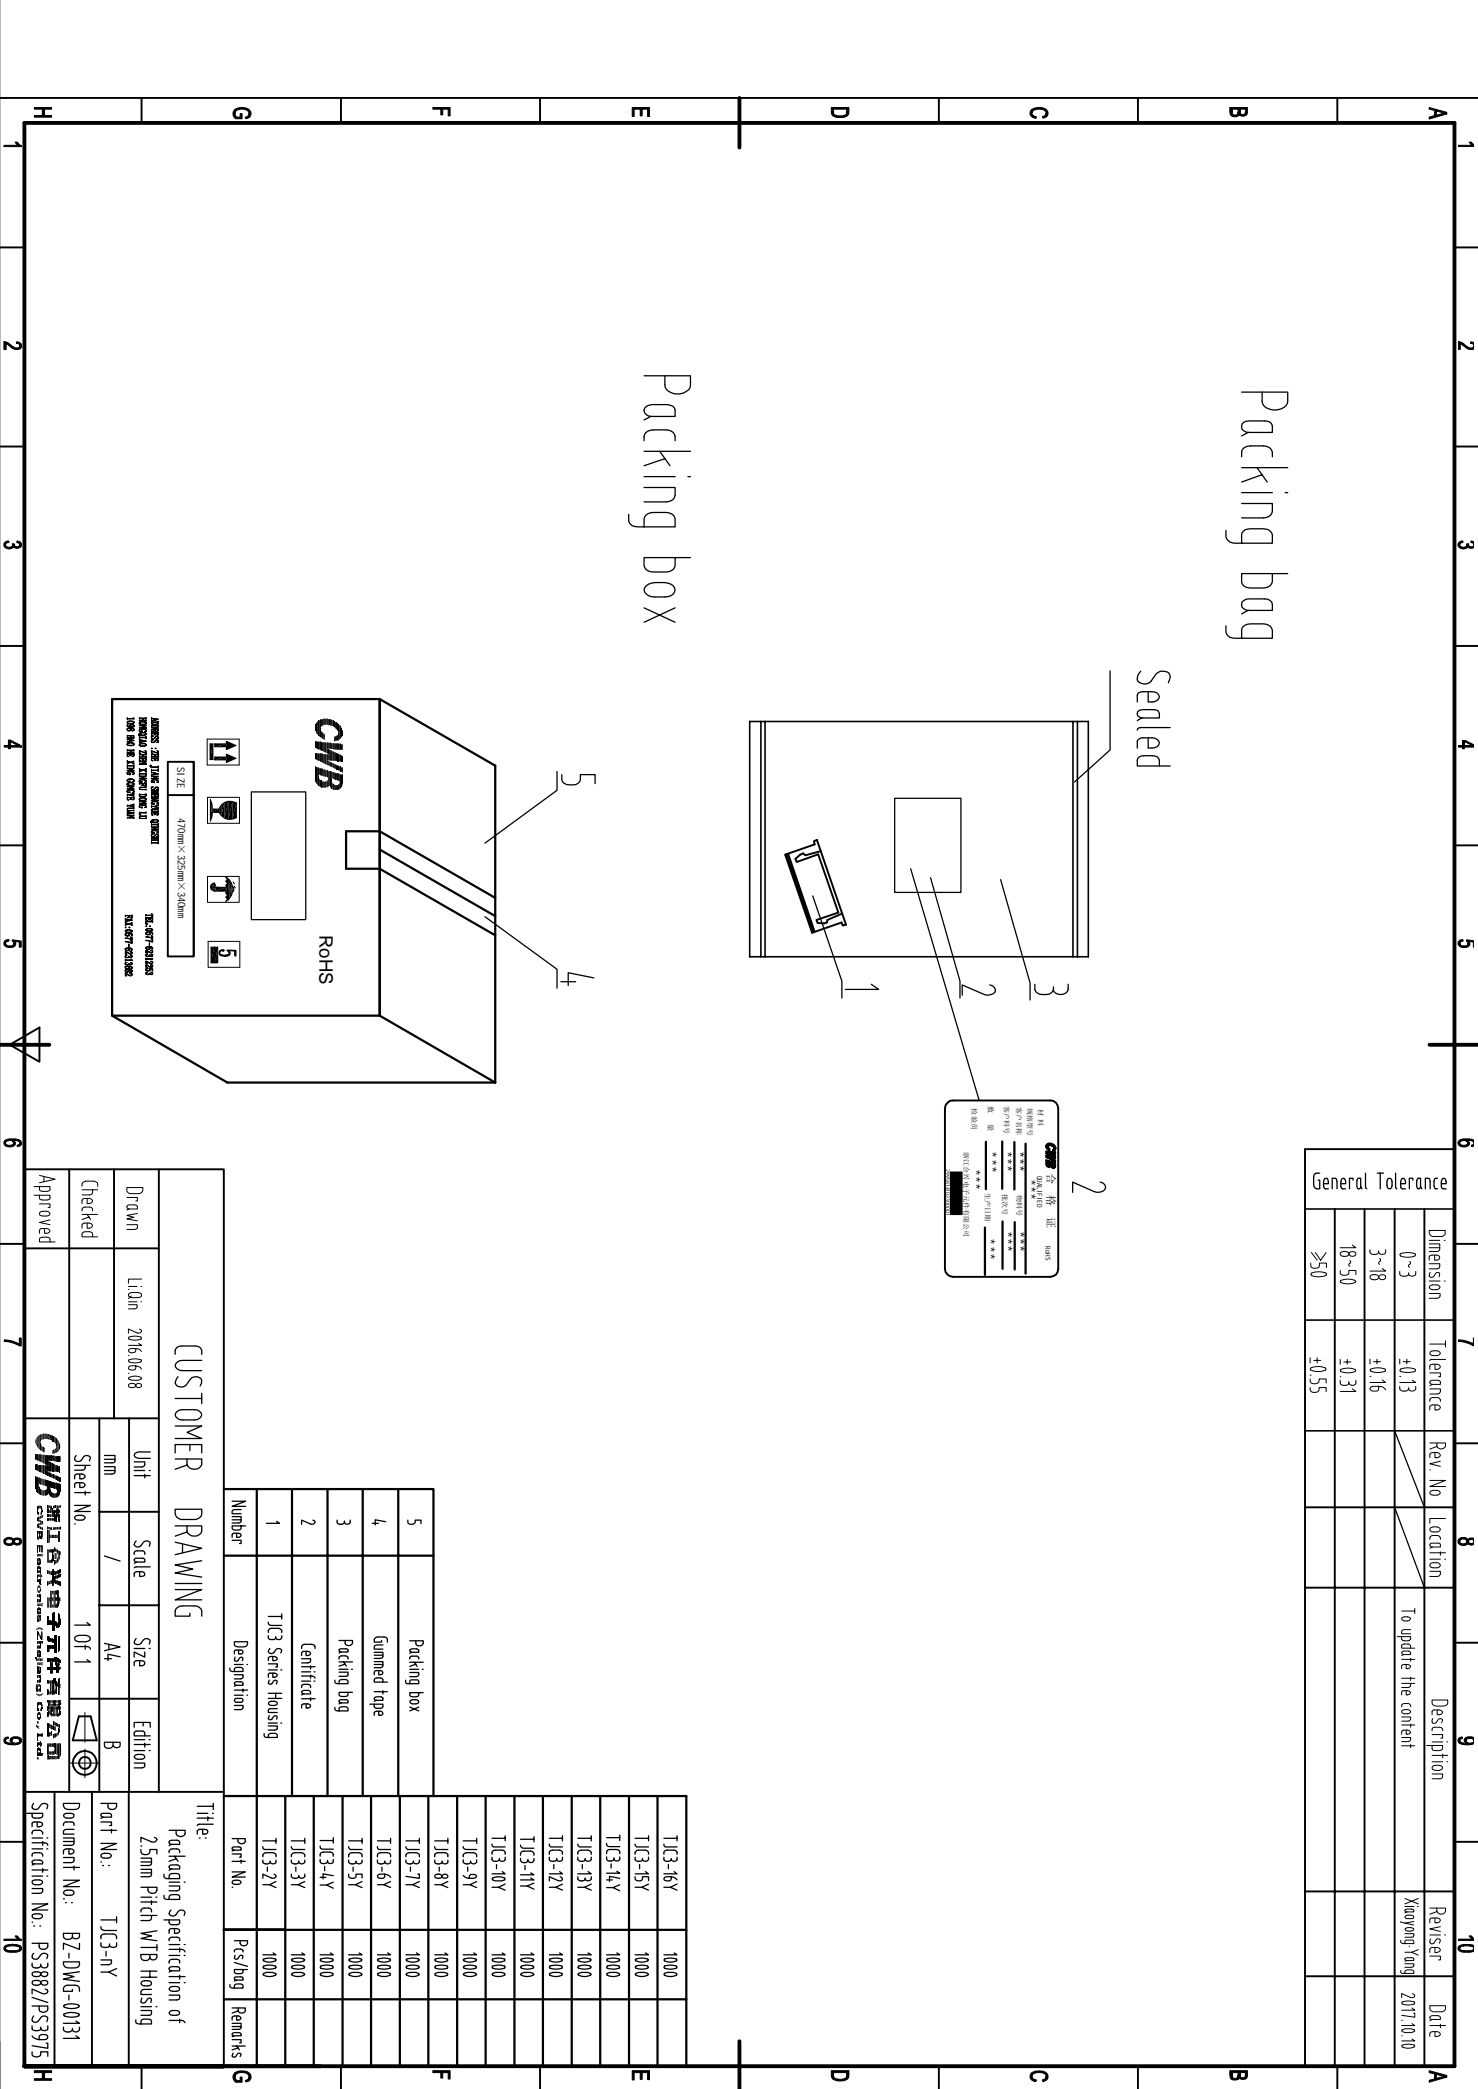


Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
0~3	±0.13					
3~18	±0.16					
18~50	±0.31					
≥50	±0.55					

Packing bag

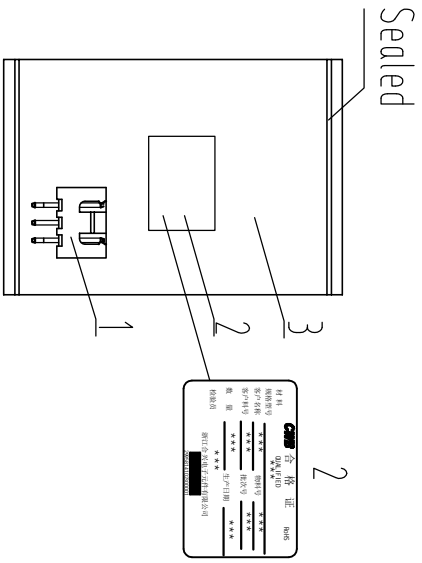

Packing box

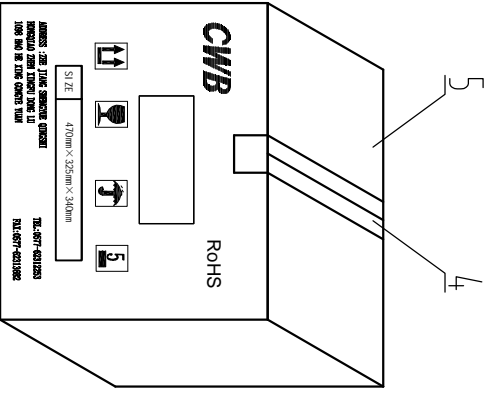

Number	Designation	Remarks
5	Packing box	
4	Gummed tape	
3	Packing bag	
2	Certificate	
1	TJC-3AS	1000kps/bag


CUSTOMER DRAWING				Title:	
Drawn	LiJin	2016.06.08	Unit	Scale	Size
Checked	Guoying Wang	2016.06.18	mm	/	A4
Approved	Dongxuliu	2016.06.22	Sheet No.	1 of 1	B
			Edition		
			Part No.:		TJC-3AS
			Document No.:		BZ-DWG-00143
			Specification No.:		PS3882

CWB 浙江长兴电子元件有限公司
CWB Electronics (Zhejiang) Co., Ltd.



General Tolerance		Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
	0~3	±0.13						
	3~18	±0.16						
	18~50	±0.31						
	≥50	±0.55						

Packing bag

Sealed

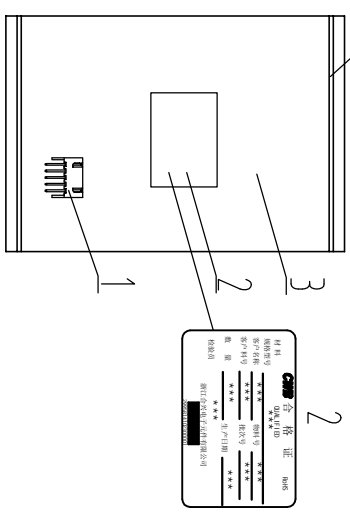

Packing box

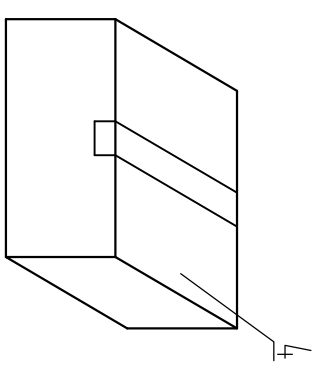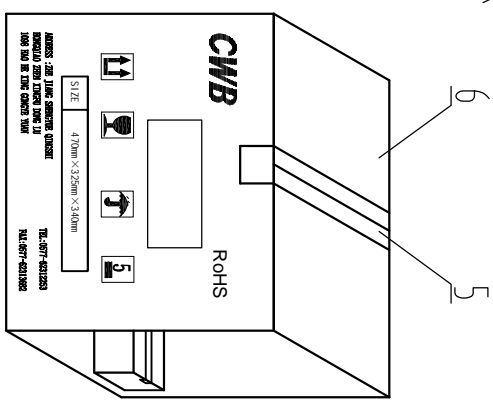


Number	Designation	Part No.	Pcs/bag	Remarks
6	Outer Packing box	TJG-9AJ	1000	
5	Gummy tape	TJG-8AJ	1000	
4	Inner Packing box	TJG-7AJ	1000	
3	Packing bag	TJG-6AJ	1000	
2	Certificate	TJG-5AJ	1000	
1	TJG-nAJ Series Header	TJG-4AJ	1000	
		TJG-3AJ	1000	
		TJG-2AJ	1000	



CUSTOMER DRAWING

Drawn	LiQin	2016.06.08	Unit	mm	Scale	/	Size	A4	Edition	B	Part No.:	TJG-nAJ
Checked	Guoying Wang	2016.06.18	Sheet No.	1 OF 1							Document No.:	BZ-DWG-00146
Approved	Dongxuliu	2016.06.22	CWB 浙江众兴电子元件有限公司		CWB Electronics (Zhejiang) Co., Ltd.						Specification No.:	P33882

Title: Packaging Specification of 25mm Pitch WRB Header

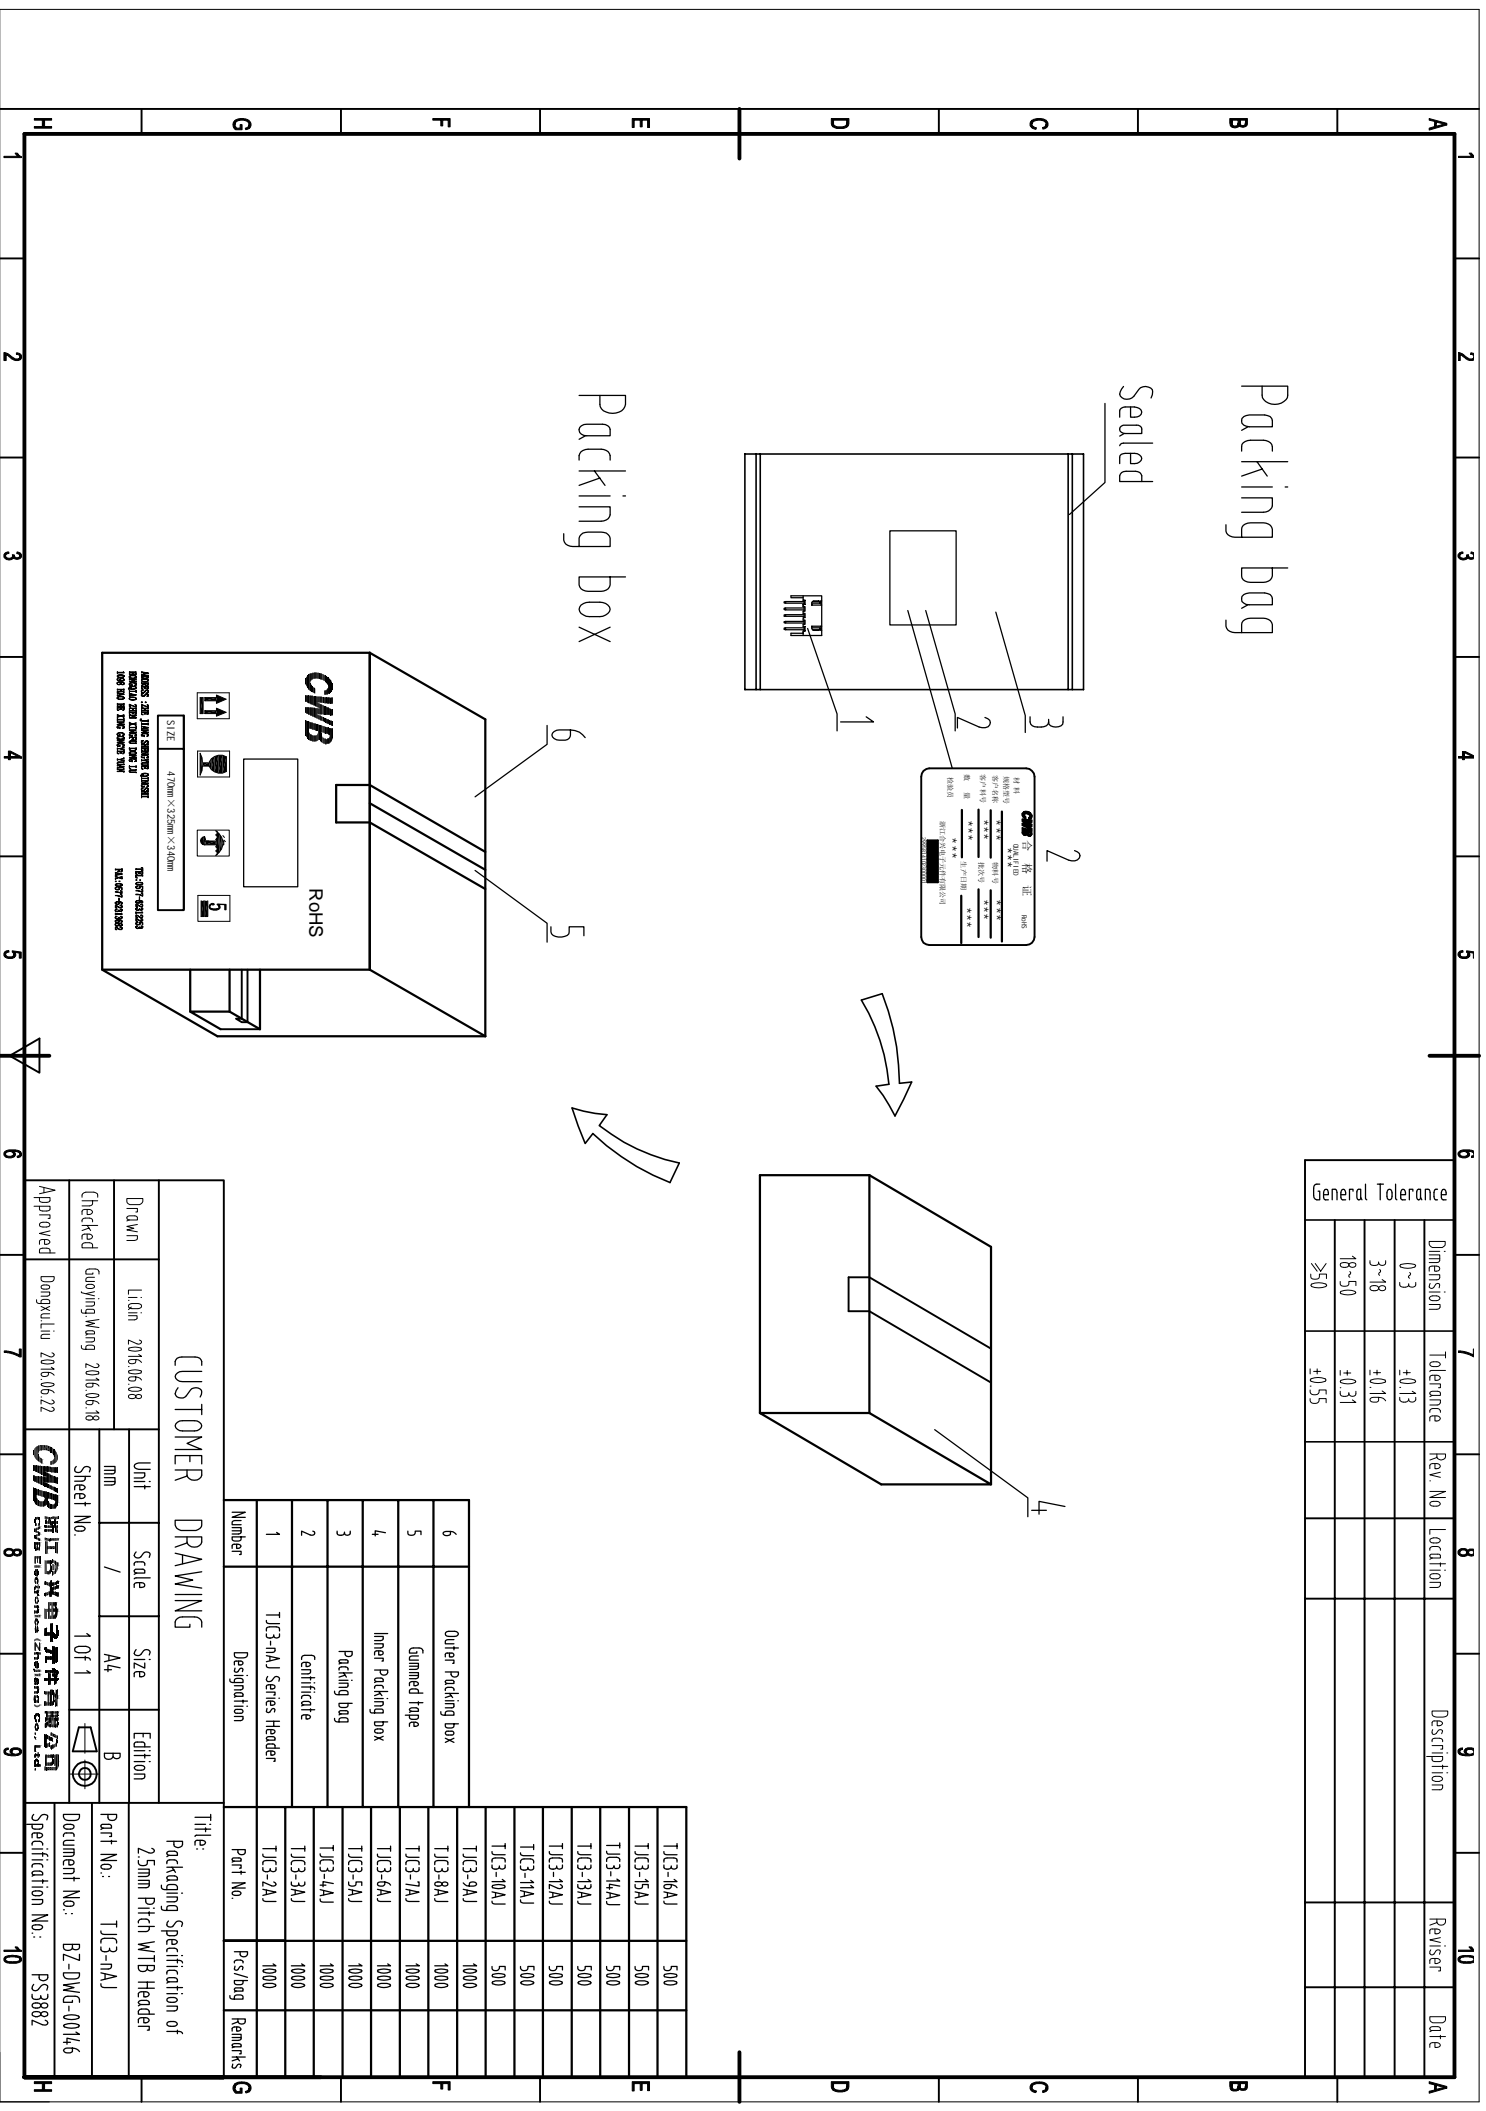

General Tolerance				Revision		Description		Reviser		Date	
Dimension	Tolerance	Rev. No	Location								
0~3	±0.13		△			New Specification No.		Xinyong Yang			2016.08.25
3~18	±0.16		△			To update the content		Xinyong Yang			2017.10.10
18~50	±0.31										
≥50	±0.55										

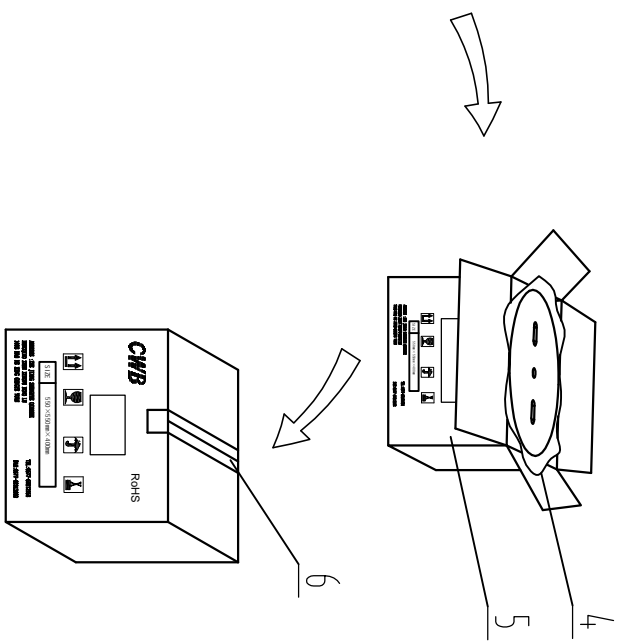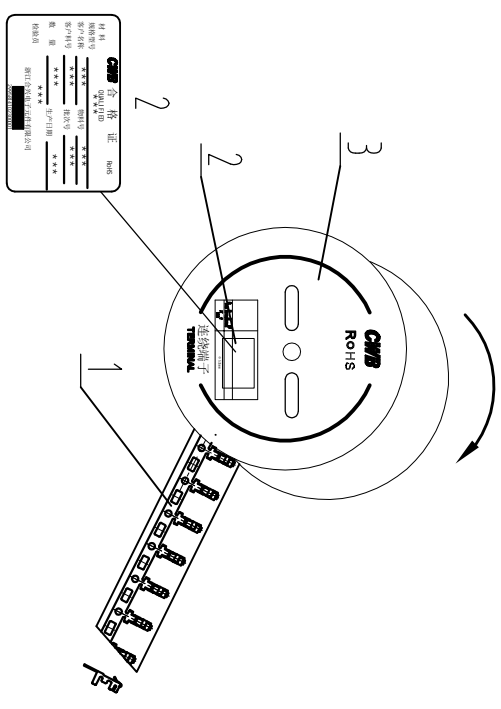


Number	Designation	Remarks
1	TJ3 Terminal	
2	Certificate	
3	Reel	7000PCS/disc
4	Packing bag	105000PCS/bag
5	Packing box	105000PCS/box
6	Gummed tape	

CUSTOMER DRAWING


Title: Packaging Specification of 25mm Pitch WTB Socket Terminal		Edition: B		Part No.: TJ3/TJ3-1△	
Drawn: Lingling Zhang 2016.3.10	Unit: mm	Scale: /	Size: A4	Sheet No.: 1 of 1	Document No.: BZ-DWG-00110
Checked:	CMB 浙江合兴电子元件有限公司				
Approved:	CMB EVBS Electronics (Zhejiang) Co., Ltd.				
Specification No.: JZS29U/CS388/CS388/CS395△			Revision: 1.0		

Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
0~3	±0.13					
3~18	±0.16					
18~50	±0.31					
≥50	±0.55					

Packing bag

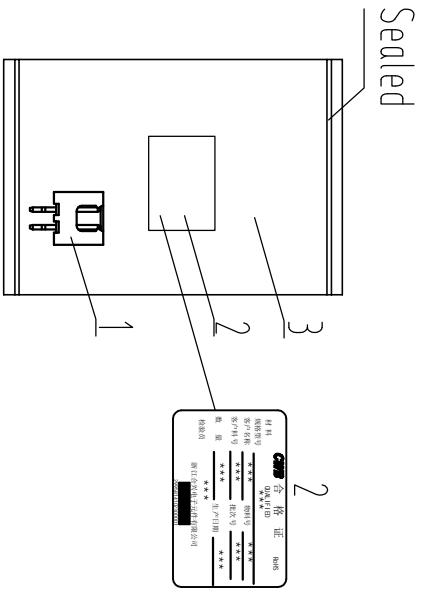

Packing box

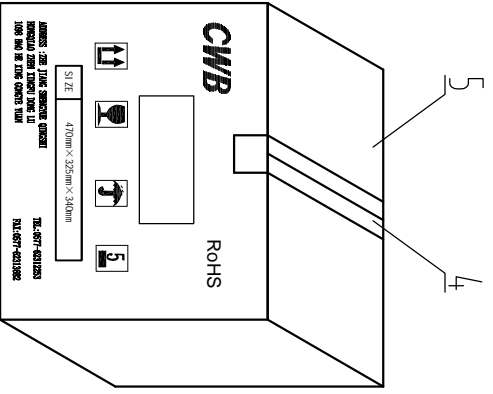

Number	Designation	Remarks
5	Packing box	
4	Gummed tape	
3	Packing bag	
2	Certificate	
1	TJC3-2A-S	1000kps/bag

CUSTOMER DRAWING




Drawn	LiuLin	2016.06.08	Unit	mm	Scale	/	Size	A4	Edition	B	Part No.:	TJC3-2A-S
Checked	Guoying Wang	2016.06.18	Sheet No.	1 OF 1							Document No.:	BZ-DWG-00141
Approved	Dongxuliu	2016.06.22									Specification No.:	PS3882

CWB 浙江合兴电子元件有限公司
CWB Electronics (Zhejiang) Co., Ltd.


Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
0~3	±0.13					
3~18	±0.16					
18~50	±0.31					
≥50	±0.55					

Packing bag

Sealed

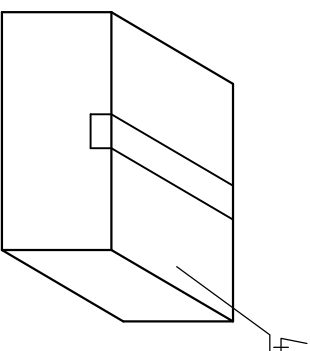

Packing box

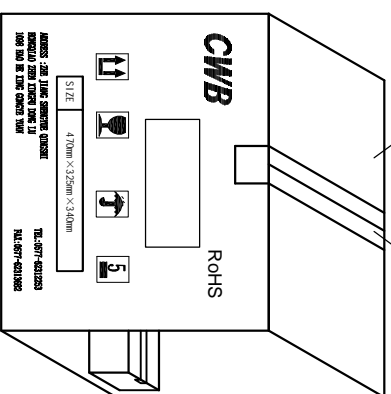


Number	Designation	Part No.	Pcs/bag	Remarks	Part No.	Pcs/bag	Remarks
1	TJC3-nAW/nAW-3.2 Series Header	TJC3-2AW	1000		TJC3-2AW-3.2	1000	
2	Certificate	TJC3-3AW	1000				
3	Packing bag	TJC3-4AW	1000		TJC3-3AW-3.2	1000	
4	Inner Packing box	TJC3-5AW	1000		TJC3-4AW-3.2	1000	
5	Guimmed tape	TJC3-6AW	1000		TJC3-5AW-3.2	1000	
6	Outer Packing box	TJC3-7AW	1000		TJC3-6AW-3.2	1000	
		TJC3-8AW	1000		TJC3-7AW-3.2	1000	
		TJC3-9AW	500		TJC3-8AW-3.2	1000	
		TJC3-10AW	500		TJC3-9AW-3.2	500	
		TJC3-11AW	500		TJC3-10AW-3.2	500	
		TJC3-12AW	500		TJC3-11AW-3.2	500	
		TJC3-13AW	500		TJC3-12AW-3.2	500	
		TJC3-14AW	500		TJC3-13AW-3.2	500	
		TJC3-15AW	500		TJC3-14AW-3.2	500	
		TJC3-16AW	500		TJC3-15AW-3.2	500	



CUSTOMER DRAWING

Drawn	LiJin	2016.06.08	Unit	mm	Scale	/	Size	A4	Edition	B	Title	Packaging Specification of 2.5mm Pitch WRB Header
Checked	Guoying Wang	2016.06.18	Sheet No.	1 OF 1		CWB		浙江合兴电子有限公司 CWB Electronics (Zhejiang) Co., Ltd.		Document No.:	BZ-DWG-00147	
Approved	Dongxuliu	2016.06.22	Part No.:		TJC3-nAW/TJC3-nAW-3.2		Specification No.:		P33882			

Packing bag

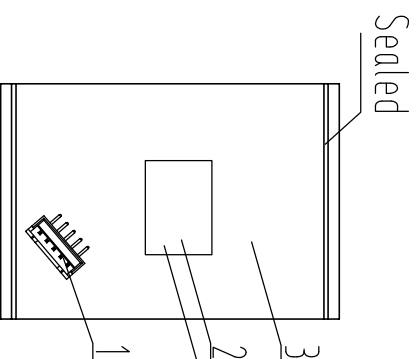

Packing box

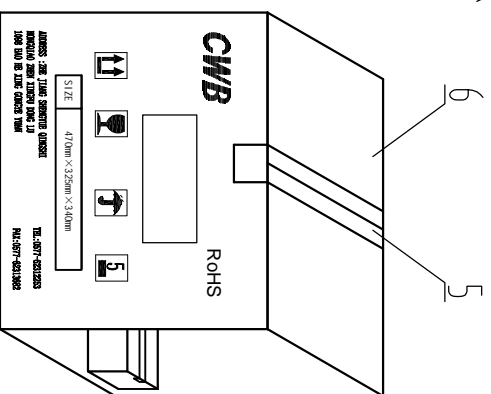

General Tolerance		Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
	0~3	±0.13			△	Update the content PS3982	Xinyong Yang	2018.01.05
	3~18	±0.16			△	Update the content	Xinyong Yang	2018.05.13
	18~50	±0.31						
	≥50	±0.55						


1	TJC3-1AWJ/nAWJ-3/2 Series Header	1000	TJC3-2AWJ	1000	TJC3-2AWJ-3/2	1000	TJC3-2AWJ-3/2	1000
2	Certificate	1000	TJC3-3AWJ	1000	TJC3-4AWJ-3/2	1000	TJC3-3AWJ-3/2	1000
3	Packing bag	1000	TJC3-5AWJ	1000	TJC3-5AWJ-3/2	1000	TJC3-4AWJ-3/2	1000
4	Inner Packing box	1000	TJC3-6AWJ	1000	TJC3-6AWJ-3/2	1000	TJC3-5AWJ-3/2	1000
5	Gummed tape	1000	TJC3-7AWJ	1000	TJC3-7AWJ-3/2	1000	TJC3-6AWJ-3/2	1000
6	Outer Packing box	1000	TJC3-8AWJ	1000	TJC3-8AWJ-3/2	1000	TJC3-7AWJ-3/2	1000
		500	TJC3-9AWJ	500	TJC3-9AWJ-3/2	500	TJC3-8AWJ-3/2	500
		500	TJC3-10AWJ	500	TJC3-10AWJ-3/2	500	TJC3-9AWJ-3/2	500
		500	TJC3-11AWJ	500	TJC3-11AWJ-3/2	500	TJC3-10AWJ-3/2	500
		500	TJC3-12AWJ	500	TJC3-12AWJ-3/2	500	TJC3-11AWJ-3/2	500
		200	TJC3-13AWJ	200	TJC3-13AWJ-3/2	200	TJC3-12AWJ-3/2	200
		200	TJC3-14AWJ	200	TJC3-14AWJ-3/2	200	TJC3-13AWJ-3/2	200
		200	TJC3-15AWJ	200	TJC3-15AWJ-3/2	200	TJC3-14AWJ-3/2	200
		200	TJC3-16AWJ	200	TJC3-16AWJ-3/2	200	TJC3-15AWJ-3/2	200

CUSTOMER DRAWING


CUSTOMER DRAWING				Title: Packaging Specification of 2.5mm Pitch WRB Header						
Drawn	LiQin	2016.06.08	Unit	mm	Scale	/	Size	A4	Edition	B
Checked	Guoying Wang	2018.05.14	Sheet No.	1 OF 1		1 OF 1				
Approved	Dongxuliu	2018.05.14	Document No.: BZ-DWG-00130		Specification No.: PS3882/PS3982					

Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
0~3	±0.13					
3~18	±0.16					
18~50	±0.31					
≥50	±0.55					

Packing bag

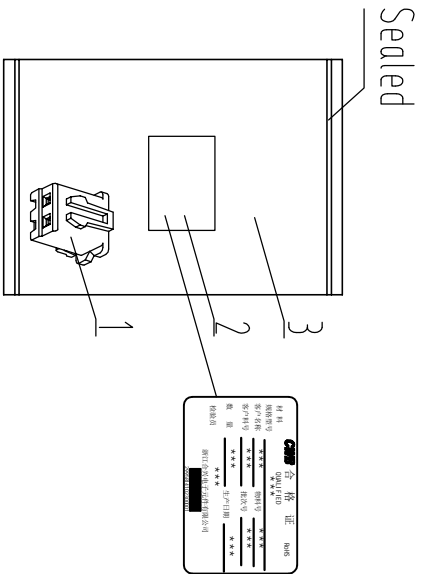

Packing box

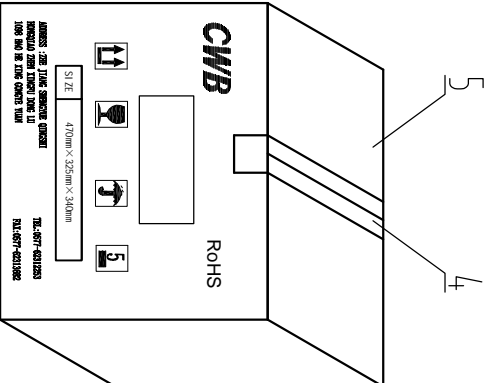

Number	Designation	Remarks
5	Packing box	
4	Gummed tape	
3	Packing bag	
2	Certificate	
1	TJC3-2Y-S	1000kps/bag



CUSTOMER DRAWING				Title:	
Drawn	LiJin	2016.06.08	Unit	Scale	Size
Checked	Guoying Wang	2016.06.18	mm	/	A4
Approved	Dongxuliu	2016.06.22	Sheet No.	1 of 1	B
			Edition		
			Part No.:		TJC3-2Y-S
			Document No.:		BZ-DWG-00142
			Specification No.:		PS3882

CWB 浙江合兴电子元件有限公司
CWB Electronics (Zhejiang) Co., Ltd.


Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
0~3	±0.13					
3~18	±0.16					
18~50	±0.31					
≥50	±0.55					

Packing bag

Sealed

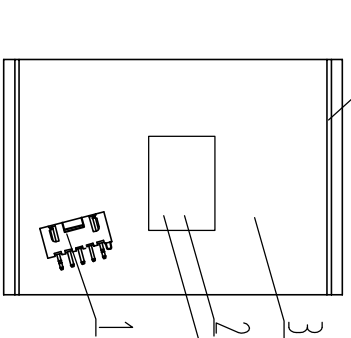

Packing box

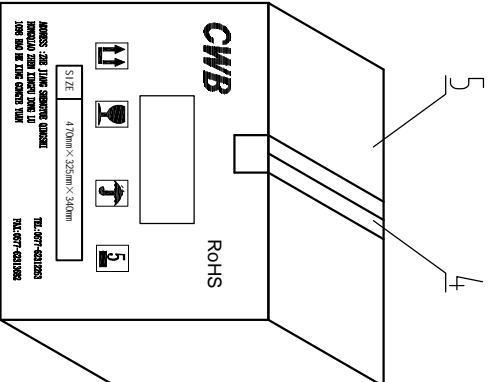


Number	Designation	Part No.	Pcs/bag	Remarks	Part No.	Pcs/bag	Remarks
1	TJG3-nAD/nADS Series Header	TJG3-2AD	1000		TJG3-2ADS	1000	
2	Certificate	TJG3-3AD	1000				
3	Packing bag	TJG3-4AD	1000		TJG3-4ADS	1000	
4	Gummed tape	TJG3-6AD	1000		TJG3-6ADS	1000	
5	Packing box	TJG3-7AD	1000		TJG3-7ADS	1000	
		TJG3-8AD	1000		TJG3-8ADS	1000	
		TJG3-9AD	1000		TJG3-9ADS	1000	
		TJG3-10AD	1000		TJG3-10ADS	1000	
		TJG3-11AD	500		TJG3-11ADS	500	
		TJG3-12AD	500		TJG3-12ADS	500	
		TJG3-13AD	500		TJG3-13ADS	500	
		TJG3-14AD	500		TJG3-14ADS	500	
		TJG3-15AD	500		TJG3-15ADS	500	
		TJG3-16AD	500		TJG3-16ADS	500	


CUSTOMER DRAWING

Drawn	LiLin	2016.06.08	Unit	mm	Scale	/	Size	A4	Edition	B	Title	Packaging Specification of 2.5mm Pitch WRB Header
Checked	Guoying Wong	2016.3.24	Sheet No.				1 OF 1				Part No.:	TJG3-nAD/TJG3-nADS
Approved	Dongxuliu	2016.3.24	 浙江合兴电子有限公司 Zhejiang HeXing Electronics Co., Ltd.								Document No.:	BZ-DWG-00145
											Specification No.:	P33882


Packing bag

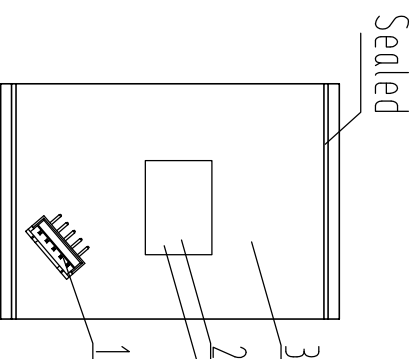

Packing box

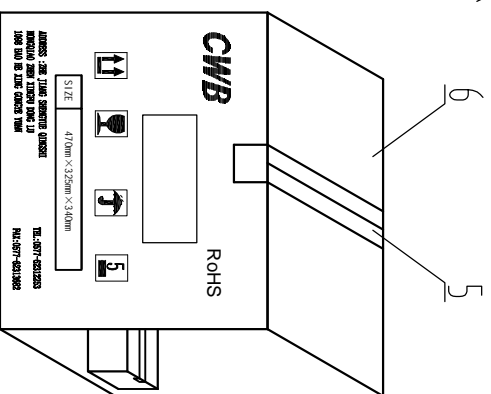

General Tolerance		Dimension	Tolerance	Rev. No	Location	Description	Reviser	Date
		0~3	±0.13		△	Update the content PS3982	Xinyong Yang	2018.01.05
		3~18	±0.16		△	Update the content	Xinyong Yang	2018.05.13
		18~50	±0.31					
		≥50	±0.55					



Number	Designation	Part No.	Pre/bag	Part No.	Pre/bag	Part No.	Pre/bag
1	TIC3-nAW/nAWJ-32 Series Header	TIC3-2AWJ	1000	TIC3-2AWJ-32	1000	TIC3-2AWJ-32	1000
2	Certificate	TIC3-3AWJ	1000	TIC3-3AWJ-32	1000	TIC3-3AWJ-32	1000
3	Packing bag	TIC3-4AWJ	1000	TIC3-4AWJ-32	1000	TIC3-4AWJ-32	1000
4	Inner Packing box	TIC3-5AWJ	1000	TIC3-5AWJ-32	1000	TIC3-5AWJ-32	1000
5	Gummed tape	TIC3-6AWJ	1000	TIC3-6AWJ-32	1000	TIC3-6AWJ-32	1000
6	Outer Packing box	TIC3-7AWJ	1000	TIC3-7AWJ-32	1000	TIC3-7AWJ-32	1000
		TIC3-8AWJ	1000	TIC3-8AWJ-32	1000	TIC3-8AWJ-32	1000
		TIC3-9AWJ	500	TIC3-9AWJ-32	500	TIC3-9AWJ-32	500
		TIC3-10AWJ	500	TIC3-10AWJ-32	500	TIC3-10AWJ-32	500
		TIC3-11AWJ	500	TIC3-11AWJ-32	500	TIC3-11AWJ-32	500
		TIC3-12AWJ	500	TIC3-12AWJ-32	500	TIC3-12AWJ-32	500
		TIC3-13AWJ	200	TIC3-13AWJ-32	200	TIC3-13AWJ-32	200
		TIC3-14AWJ	200	TIC3-14AWJ-32	200	TIC3-14AWJ-32	200
		TIC3-15AWJ	200	TIC3-15AWJ-32	200	TIC3-15AWJ-32	200
		TIC3-16AWJ	200	TIC3-16AWJ-32	200	TIC3-16AWJ-32	200

CUSTOMER DRAWING

CUSTOMER DRAWING		Title:	
Drawn	Liam 2016.06.08	Packaging Specification of 2.5mm Pitch WRB Header	
Checked	Guoying Wang 2018.05.14	Part No:	TIC3-nAWJ/TIC3-nAWJ-32
Approved	Dongxuliu 2018.05.14	Document No.:	BZ-DWG-00130
		Specification No.:	PS3882/PS3982

