




技术参数 (SPECIFICATIONS)


适用线规 (Applicable wires) : AWG#26~AWG#24
 适应基板厚度 (Applicable PC board thickness) : 1.2~1.6 mm
 温度范围 (Temperature range) : -25℃~85℃
 额定电压 (Voltage rating) : 250V AC/DC
 额定电流 (Current rating) : 2A
 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
 耐压 (Withstand voltage) : 1000V AC/minute
 认证 (STANDARDS) : E200881

端子 TERMINAL

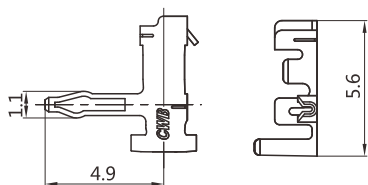


型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm ²	AWG#	
CZ-SCNC	0.13 ~ 0.2	26 ~ 24	1.3 ~ 1.4
材质 · 表面处理 Material and Finish			
磷青铜 镀锡 Phos · bronze Tin · Plated			

壳体 HOUSING

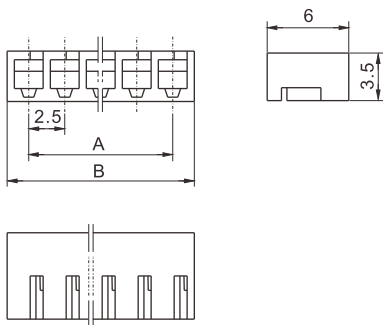


线数 Poles	型号 Type	尺寸 Dimensions(mm)		线数 Poles	型号 Type	尺寸 Dimensions(mm)	
		A	B			A	B
2	SCN-2AW	2.5	5.5	10	SCN-10AW	22.5	25.5
3	SCN-3AW	5.0	8.0	11	SCN-11AW	25.0	28.0
4	SCN-4AW	7.5	10.5	12	SCN-12AW	27.5	30.5
5	SCN-5AW	10.0	13.0	13	SCN-13AW	30.0	33.0
6	SCN-6AW	12.5	15.5	14	SCN-14AW	32.5	35.5
7	SCN-7AW	15.0	18.0	15	SCN-15AW	35.0	38.0
8	SCN-8AW	17.5	20.5	16	SCN-16AW	37.5	40.5
9	SCN-9AW	20.0	23.0				
材质 · 表面处理 Material and Finish				PA66 UL94V-0/PA66 UL94V-2			

安装尺寸 MOUNTING MEASUREMENT

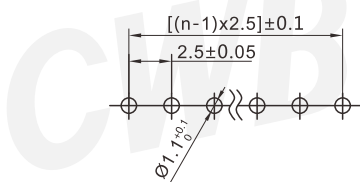

PCB Layout



Assembly View (DIM FYI)