

TJC1 型条形连接器
TJC1 Bar Connector


间距 (space) :10-8...8mm



技术参数 (SPECIFICATIONS)


适用线规 (Applicable wires) : AWG#24~AWG#20
适应基板厚度 (Applicable PC board thickness) : 1.2 ~ 1.6 mm
温度范围 (Temperature range) : -25℃~85℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 3A
接触电阻 (Contact resistance) : $\leq 0.03\Omega$
绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
耐压 (Withstand voltage) : 1000V AC/minute
认证 (STANDARDS) :  E200881

端子 TERMINAL

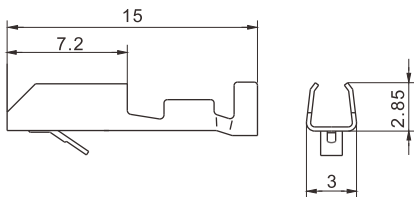

型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm ²	AWG#	
CH-TJC1	0.22~0.5	24~20	1.4~1.8
材质・表面处理 Material and Finish			
磷青铜 镀锡 Phos・bronze Tin・Plated			

阴连接器 HOUSING

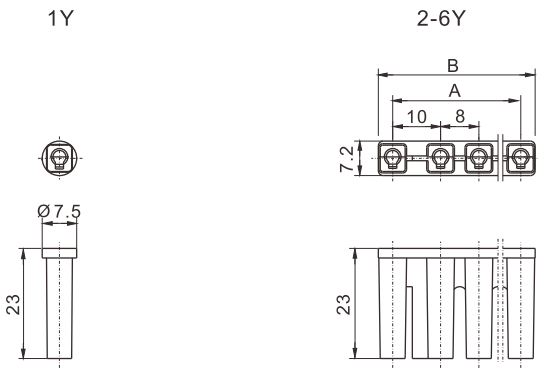


线数 Poles	型号 Type	尺寸 Dimensions(mm)	
		A	B
1	TJC1-1Y	/	/
2	TJC1-2Y	10.0	16.0
3	TJC1-3Y	18.0	24.0
4	TJC1-4Y	26.0	32.0
5	TJC1-5Y	34.0	40.0
6	TJC1-6Y	42.0	48.0
材质・表面处理 Material and Finish		PA66 UL94V-0 PA66 UL94V-2	

TJC1 型条形连接器
TJC1 Bar Connector


间距 (space) :10-8...8mm

阳连接器 HEADER

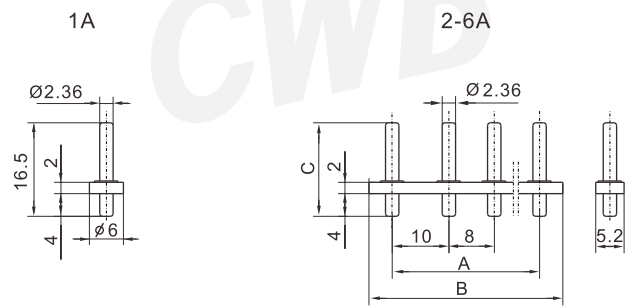


线数 Poles	型号 Type	尺寸 Dimensions(mm)		
		A	B	C
1	TJC1-1A	/	/	16.5
2	TJC1-2A	10.0	18.0	16.5
3	TJC1-3A	18.0	26.0	16.5
4	TJC1-4A	26.0	34.0	16.5
4	TJC1-4A(针长 18.5mm)	26.0	34.0	18.5
5	TJC1-5A	34.0	42.0	16.5
6	TJC1-6A	42.0	50.0	16.5
材质・表面处理 Material and Finish PBT UL94V-0・White; 黄铜 Brass Tin・Plated				

安装尺寸 MOUNTING MEASUREMENT



PCB Layout

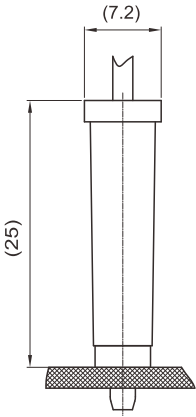

Assembly View (DIM FYI)