





技术参数 (SPECIFICATIONS)

适用线规 (Applicable wires) : AWG#20~AWG#16
 温度范围 (Temprature range) : -25℃~85℃
 额定电压 (Voltage rating) : 250V AC/DC
 额定电流 (Current rating) : 5A
 接触电阻 (Contact resistance) : ≤0.01Ω
 绝缘电阻 (Insulation resistance) : ≥1000MΩ
 耐压 (Withstand voltage) : 1500V AC/minute


认证 (STANDARDS) :  E200881

阳连接器端子 MALE CRIMP TERMINAL




型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm ²	AWG#	
CZ-TJC10	0.52~1.31	20~16	1.8~2.35
材质 · 表面处理 Material and Finish			
磷青铜 镀锡 Phos · bronze Tin · Plated			

阴连接器端子 FEMALE CRIMP TERMINAL

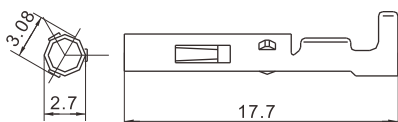


型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm ²	AWG#	
CH-TJC10	0.52~1.31	20~16	1.8~2.35
材质 · 表面处理 Material and Finish			
磷青铜 镀锡 Phos · bronze Tin · Plated			

阳连接器 HEADER

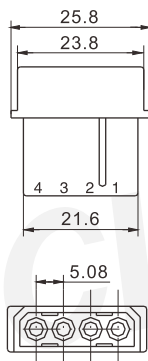

线数 Poles	型号 Type
4	TJC10-4AR
材质 · 表面处理 Material and Finish PA66 UL94V-2	

阴连接器 HOUSING



线数 Poles	型号 Type
4	TJC10-4Y
材质 · 表面处理 Material and Finish PA66 UL94V-2	

安装尺寸 MOUNTING MEASUREMENT

