

TJC10018 型条形连接器
TJC10018 Bar Connector


间距 (space) :1.0mm



技术参数 (Specifications)


适应基板厚度 (Applicable PC board thickness) : 0.8~1.6 mm
温度范围 (Temperature range) : -55℃~+110℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 0.8A
接触电阻 (Contact resistance) : ≤20mΩ
绝缘电阻 (Insulation resistance) : ≥1000MΩ
耐电压 (Withstand voltage) : 250V AC/minute

阳连接器 (立式, 表面装贴) Header (V, SMT)

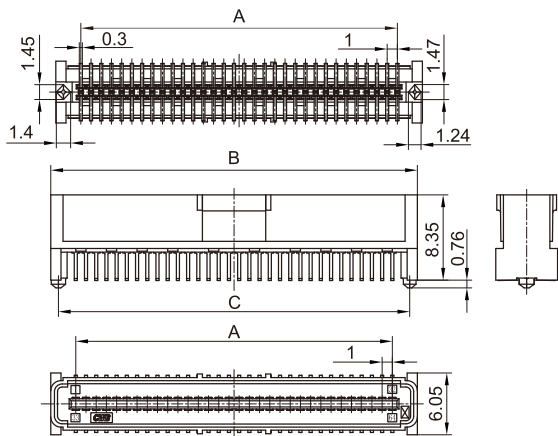


线数 Poles	型号Type	尺寸Dimensions (mm)		
		A	B	C
64	TJC10018-2×32ABD	31	35.9	34.4
材质・表面处理 Material and Finish				
LCP+GF UL94V-0 磷铜 镀金 Copper alloy Au-Plated				

安装尺寸 Mounting Measurement

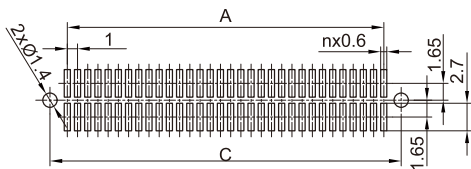

阴连接器 (立式, 表面装贴) Plug (V, SMT)

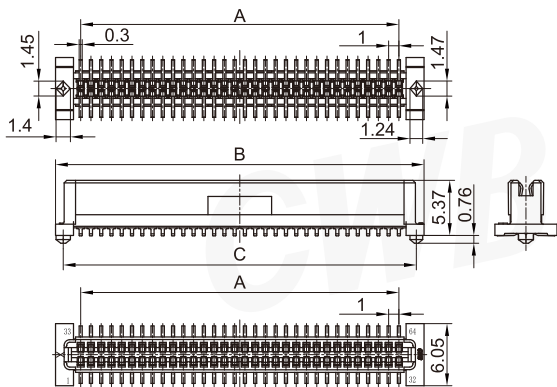

线数 Poles	型号Type	尺寸Dimensions (mm)		
		A	B	C
64	TJC10018-2×32YBD	31	35.9	34.4
材质・表面处理 Material and Finish				
LCP+GF UL94V-0 磷铜 镀金 Copper alloy Au-Plated				

安装尺寸 Mounting Measurement

