

TJC1003 型扁平电缆连接器
TJC1003 Flat Cable Connector

间距 (space) :1.0mm




技术参数 (SPECIFICATIONS)


适用线缆 (Useable wire range) : 厚度 0.3mm 柔性扁平电缆
适用基板厚度 (Applicable PCB thickness) : 1.2~1.6mm
温度范围 (Voltage rating) : -25℃~85℃
额定电压 (Voltage rating) : 50V AC/DC
额定电流 (Current rating) : 0.5A
接触电阻 (Insulation resistance) : $\leq 0.03 \Omega$
绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
耐压 (Withstand voltage) : 500V AC/minute

认证 (STANDARDS) :  E200881

阳连接器 (直式) HEADER (180°)

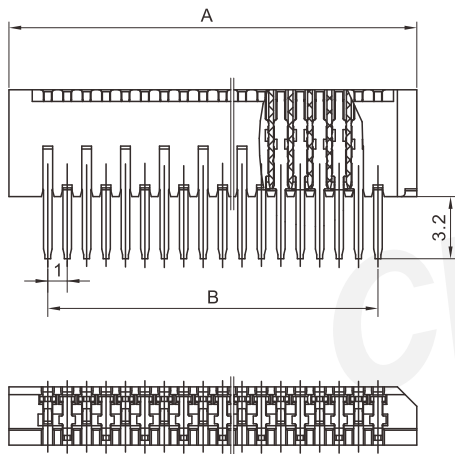

阳连接器 (弯式) HEADER (90°)

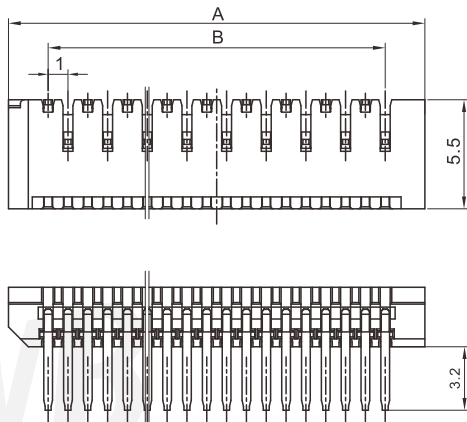

TJC1003 型扁平电缆连接器
TJC1003 Flat Cable Connector

间距 (space) :1.0mm

线数 Poles	型号 Type		尺寸Dimensions (mm)		线数 Poles	型号 Type		尺寸Dimensions (mm)	
	直式 (180°)	弯式 (90°)	A	B		直式 (180°)	弯式 (90°)	A	B
3	TJC1003-3FC	TJC1003-3FWC	6	2	17	TJC1003-17FC	TJC1003-17FWC	20	16
4	TJC1003-4FC	TJC1003-4FWC	7	3	18	TJC1003-18FC	TJC1003-18FWC	21	17
5	TJC1003-5FC	TJC1003-5FWC	8	4	19	TJC1003-19FC	TJC1003-19FWC	22	18
6	TJC1003-6FC	TJC1003-6FWC	9	5	20	TJC1003-20FC	TJC1003-20FWC	23	19
7	TJC1003-7FC	TJC1003-7FWC	10	6	21	TJC1003-21FC	TJC1003-21FWC	24	20
8	TJC1003-8FC	TJC1003-8FWC	11	7	22	TJC1003-22FC	TJC1003-22FWC	25	21
9	TJC1003-9FC	TJC1003-9FWC	12	8	23	TJC1003-23FC	TJC1003-23FWC	26	22
10	TJC1003-10FC	TJC1003-10FWC	13	9	24	TJC1003-24FC	TJC1003-24FWC	27	23
11	TJC1003-11FC	TJC1003-11FWC	14	10	25	TJC1003-25FC	TJC1003-25FWC	28	24
12	TJC1003-12FC	TJC1003-12FWC	15	11	26	TJC1003-26FC	TJC1003-26FWC	29	25
13	TJC1003-13FC	TJC1003-13FWC	16	12	27	TJC1003-27FC	TJC1003-27FWC	30	26
14	TJC1003-14FC	TJC1003-14FWC	17	13	28	TJC1003-28FC	TJC1003-28FWC	31	27
15	TJC1003-15FC	TJC1003-15FWC	18	14	29	TJC1003-29FC	TJC1003-29FWC	32	28
16	TJC1003-16FC	TJC1003-16FWC	19	15	30	TJC1003-30FC	TJC1003-30FWC	33	29
材质 · 表面处理 Material and Finish									
PPS UL94V-0; 磷青铜 镀锡 Phos · bronze Tin · Plating									

安装尺寸 MOUNTING MEASUREMENT

