


TJC10031 型扁平电缆连接器
TJC10031 Flat Cable Connector


间距 (space) :1.0mm



技术参数 (Specifications)


适用FPC软板 (Useable FPC Board range) : Thickness=0.3mm
适应基板厚度 (Applicable PC board thickness) : 1.6 mm
温度范围 (Temperature range) : -40℃~+85℃
额定电压 (Voltage rating) : 50V AC/DC
额定电流 (Current rating) : 0.5A
接触电阻 (Contact resistance) : $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance) : $\geq 100\text{M}\Omega$
耐电压 (Withstand voltage) : 500V AC/minute

FPC/FFC连接器 (卧式，表面装贴) FPC/FFC Conn.(H, SMT)

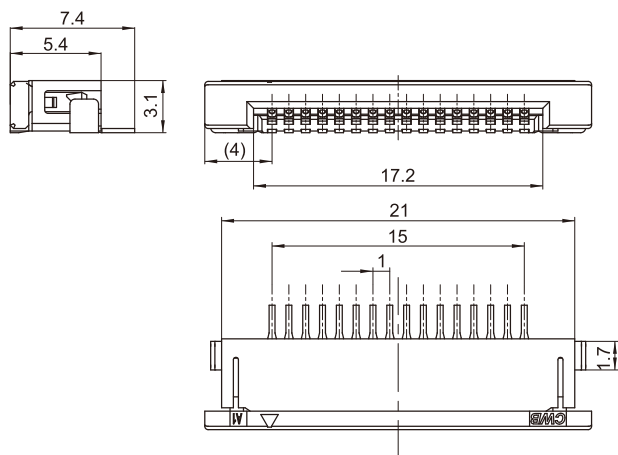


线数 Poles	型号 Type
16	TJC10031-16FWB
材质・表面处理 Material and Finish	
PA10T+GF UL94V-0; 磷青铜 局部镀金 Phos bronze Gold・Plated	

安装尺寸 Mounting Measurement

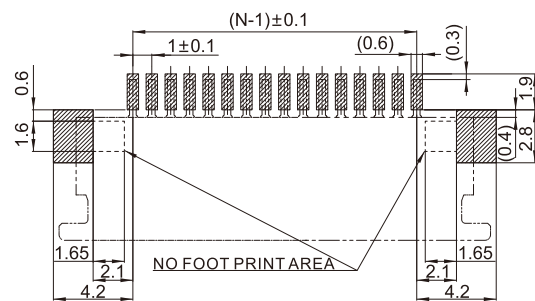

RECOMMENDED PCB LAYOUT(TOP VIEW)
PCB THINCKNESS:1.6mm TOLERANCE :±0.05

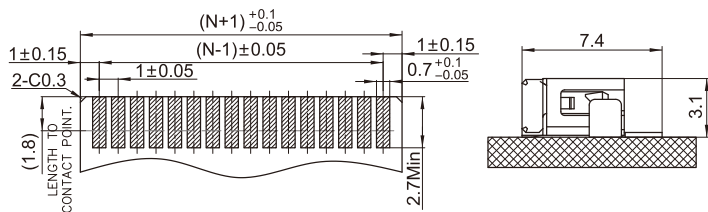

APPLICABLE FPC RECOMMENDED DIMENSION
THICKNESS: 0.3±0.05