

间距 (space) :1.25mm



温度范围 (Temperature range) : $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$

额定电压 (Voltage rating) : 200V AC/DC

额定电流 (Current rating) : 1A

接触电阻 (Contact resistance) : $\leq 0.03 \Omega$

绝缘电阻 (Insulation resistance) : $\geq 500\text{M}\Omega$

耐压 (Withstand voltage) : 500V AC/minute


认证 (STANDARDS) :  E200881

线数 Poles	型号 Type	尺寸 Dimensions (mm)		线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B			A	B
4	TJC1256-4FK	8.55	3.75	23	TJC1256-23FK	32.30	30.15
5	TJC1256-5FK	9.80	5.00	24	TJC1256-24FK	33.55	31.40
6	TJC1256-6FK	11.05	6.25	25	TJC1256-25FK	34.80	32.65
7	TJC1256-7FK	12.30	7.50	26	TJC1256-26FK	36.05	33.90
8	TJC1256-8FK	13.55	8.75	27	TJC1256-27FK	37.30	35.15
9	TJC1256-9FK	14.80	10.00	28	TJC1256-28FK	38.55	36.40
10	TJC1256-10FK	16.05	11.25	29	TJC1256-29FK	39.80	37.65
11	TJC1256-11FK	17.30	12.50	30	TJC1256-30FK	41.05	38.90
12	TJC1256-12FK	18.55	13.75	31	TJC1256-31FK	42.30	40.15
13	TJC1256-13FK	19.80	15.00	32	TJC1256-32FK	43.55	41.40
14	TJC1256-14FK	21.05	16.25	33	TJC1256-33FK	44.80	42.65
15	TJC1256-15FK	22.30	17.50	34	TJC1256-34FK	46.05	43.90
16	TJC1256-16FK	23.55	18.75	35	TJC1256-35FK	47.30	45.15
17	TJC1256-17FK	24.80	20.00	36	TJC1256-36FK	48.55	46.40
18	TJC1256-18FK	26.05	21.25	37	TJC1256-37FK	49.80	47.65
19	TJC1256-19FK	27.30	22.50	38	TJC1256-38FK	51.05	48.90
20	TJC1256-20FK	28.55	23.75	39	TJC1256-39FK	52.30	50.15
21	TJC1256-21FK	29.80	25.00	40	TJC1256-40FK	53.55	51.40
22	TJC1256-22FK	31.05	26.25				
材质・表面处理 Material and Finish PA UL94V-0							
磷青铜 镀锡 Phos・bronze Tin・Plated							

TJC1256 型条形连接器
TJC1256 Bar Connector


间距 (space) :1.25mm

阴连接器 HOUSING (90°)

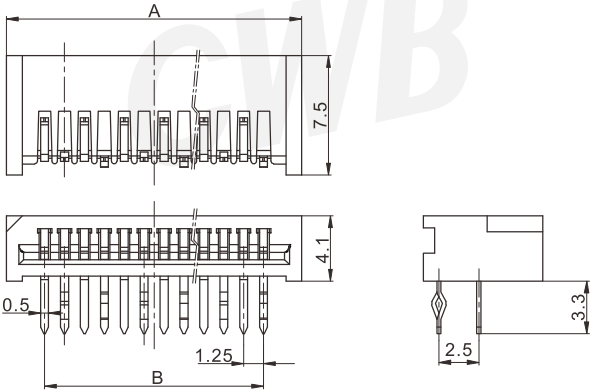


线数 Poles	型号 Type	尺寸 Dimensions (mm)		线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B			A	B
4	TJC1256-4FWK	8.55	3.75	23	TJC1256-23FWK	32.30	30.15
5	TJC1256-5FWK	9.80	5.00	24	TJC1256-24FWK	33.55	31.40
6	TJC1256-6FWK	11.05	6.25	25	TJC1256-25FWK	34.80	32.65
7	TJC1256-7FWK	12.30	7.50	26	TJC1256-26FWK	36.05	33.90
8	TJC1256-8FWK	13.55	8.75	27	TJC1256-27FWK	37.30	35.15
9	TJC1256-9FWK	14.80	10.00	28	TJC1256-28FWK	38.55	36.40
10	TJC1256-10FWK	16.05	11.25	29	TJC1256-29FWK	39.80	37.65
11	TJC1256-11FWK	17.30	12.50	30	TJC1256-30FWK	41.05	38.90
12	TJC1256-12FWK	18.55	13.75	31	TJC1256-31FWK	42.30	40.15
13	TJC1256-13FWK	19.80	15.00	32	TJC1256-32FWK	43.55	41.40
14	TJC1256-14FWK	21.05	16.25	33	TJC1256-33FWK	44.80	42.65
15	TJC1256-15FWK	22.30	17.50	34	TJC1256-34FWK	46.05	43.90
16	TJC1256-16FWK	23.55	18.75	35	TJC1256-35FWK	47.30	45.15
17	TJC1256-17FWK	24.80	20.00	36	TJC1256-36FWK	48.55	46.40
18	TJC1256-18FWK	26.05	21.25	37	TJC1256-37FWK	49.80	47.65
19	TJC1256-19FWK	27.30	22.50	38	TJC1256-38FWK	51.05	48.90
20	TJC1256-20FWK	28.55	23.75	39	TJC1256-39FWK	52.30	50.15
21	TJC1256-21FWK	29.80	25.00	40	TJC1256-40FWK	53.55	51.40
22	TJC1256-22FWK	31.05	26.25				
材质・表面处理 Material and Finish				PA UL94V-0			
磷青铜 镀锡 Phos・bronze Tin・Plated							

安装尺寸 MOUNTING MEASUREMENT

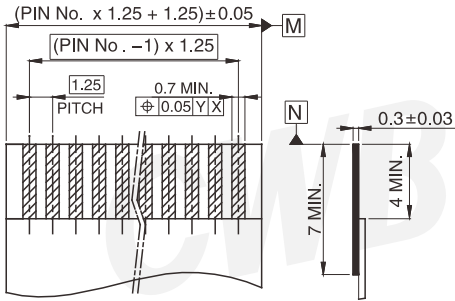

RECOMMENDED FPC LAYOUT

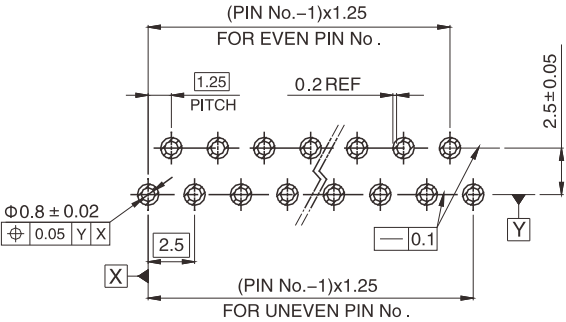

RECOMMENDED PCB LAYOUT

RECOMMENDED PCB THICKNESS: 1.6mm