


TJC1501 型条形连接器
TJC1501 Bar Connector


间距 (space) :1.5mm

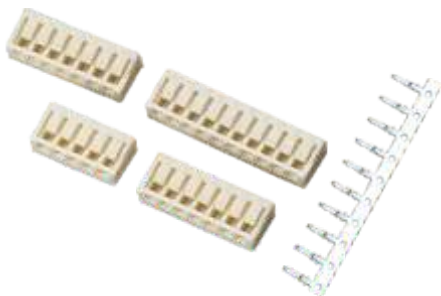

技术参数 (SPECIFICATIONS)


- 适用线规 (Applicable wires) : AWG#30~AWG#26
- 温度范围 (Temprature range) : -25℃~85℃
- 适应基板厚度 (Applicable PC board thickness) : 1.2~1.6mm
- 额定电压 (Voltage rating) : 50V AC/DC
- 额定电流 (Current rating) : 0.7A
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstand voltage) : 500V AC/minute
- 认证 (STANDARDS) :  E200881

端子 TERMINAL




型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm ²	AWG#	
CZ-TJC1501	0.05 ~ 0.13	30 ~ 26	1.15~1.3
材质・表面处理 Material and Finish			
磷青铜 镀锡 Phos・bronze Tin・Plated			

壳体 HOUSING

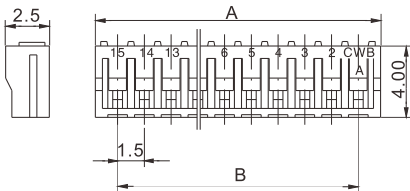

线数 Poles	型号 Type	尺寸 Dimensions(mm)	
		A	B
2	TJC1501-2A	4.0	3.0
3	TJC1501-3A	5.5	4.5
4	TJC1501-4A	7.0	6.0
5	TJC1501-5A	8.5	7.5
6	TJC1501-6A	10.0	9.0
7	TJC1501-7A	11.5	10.5
8	TJC1501-8A	13.0	12.0
9	TJC1501-9A	14.5	13.5
10	TJC1501-10A	16.0	15.0
11	TJC1501-11A	17.5	16.5
12	TJC1501-12A	19.0	18.0
13	TJC1501-13A	20.5	19.5
14	TJC1501-14A	22.0	21.0
15	TJC1501-15A	23.5	22.5
材质・表面处理 Material and finish		PA66 UL94V-0	

安装尺寸 MOUNTNG MEASUREMENT



PCB Layout