


TJC16 (WTW) 型条形连接器
TJC16 (WTW) Bar Connector


间距 (space) :4.2mm

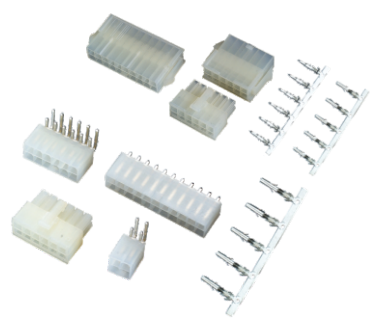

技术参数 (Specifications)


适用线规 (Applicable wires) : AWG#28~AWG#18
适应基板厚度 (Applicable PC board thickness) : 0.8~1.6 mm
温度范围 (Temperature range) : -25℃~85℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 5A
接触电阻 (Contact resistance) : ≤10mΩ
绝缘电阻 (Insulation resistance) : ≥1000MΩ
耐压 (Withstand voltage) : 2200V AC/minute
认证 (Standards) :  E200881

插簧 Contact

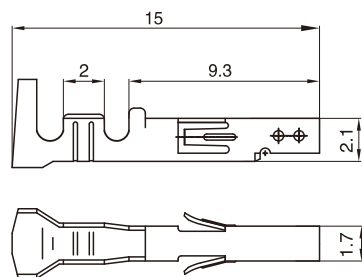


型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm ²	AWG#	
CH-TJC16	0.08 ~ 0.83	28 ~ 18	1.2 ~ 2.05
材质 · 表面处理 Material and Finish			
磷青铜镀锡 Phos · bronze Tin · Plated			

插针 Pin contact

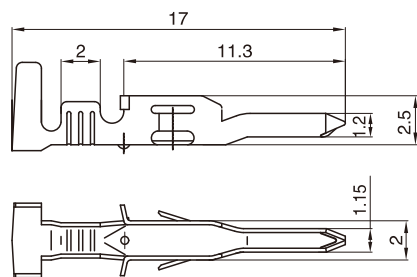

型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm ²	AWG#	
CZ-TJC16	0.08 ~ 0.83	28 ~ 18	1.2 ~ 2.05
材质 · 表面处理 Material and Finish			
磷青铜镀锡 Phos · bronze Tin · Plated			


针座 (面板安装) Receptacle housing (Panel mount)

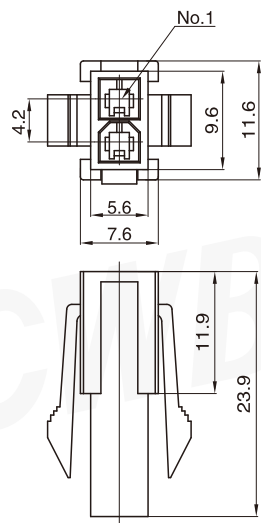

线数 Poles	型号 Type
2	TJC16-2x1ARP
材质 Material	
PA66 UL94V-0	

TJC16 (WTW) 型条形连接器
TJC16 (WTW) Bar Connector


间距 (space) :4.2mm

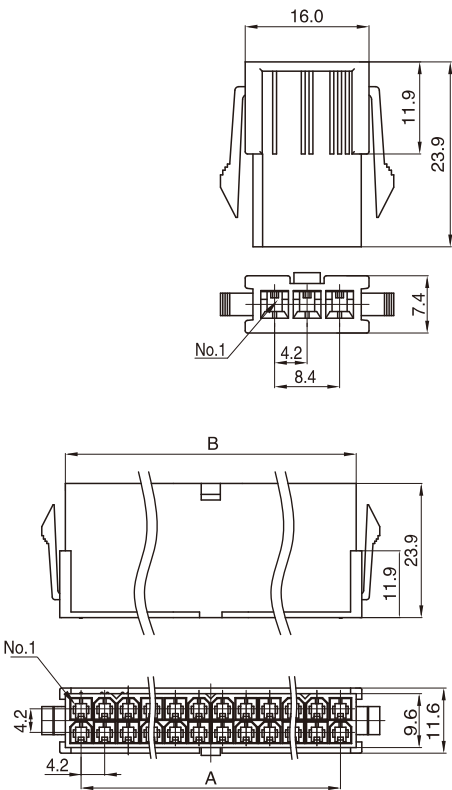

线数 Poles	型号 Type
3	TJC16-3ARP
材质 Material	
PA66 UL94V-0	

线数 Poles	型号 Type	尺寸Dimensions(mm)		线数 Poles	型号 Type	尺寸Dimensions(mm)	
		A	B			A	B
4	TJC16-2x2ARP	4.2	9.8	16	TJC16-2x8ARP	29.4	35.0
6	TJC16-2x3ARP	8.4	14.0	18	TJC16-2x9ARP	33.6	39.2
8	TJC16-2x4ARP	12.6	18.2	20	TJC16-2x10ARP	37.8	43.4
10	TJC16-2x5ARP	16.8	22.4	22	TJC16-2x11ARP	42.0	47.6
12	TJC16-2x6ARP	21.0	26.6	24	TJC16-2x12ARP	46.2	51.8
14	TJC16-2x7ARP	25.2	30.8				
材质 Material		PA66 UL94V-0					

孔座 Housing

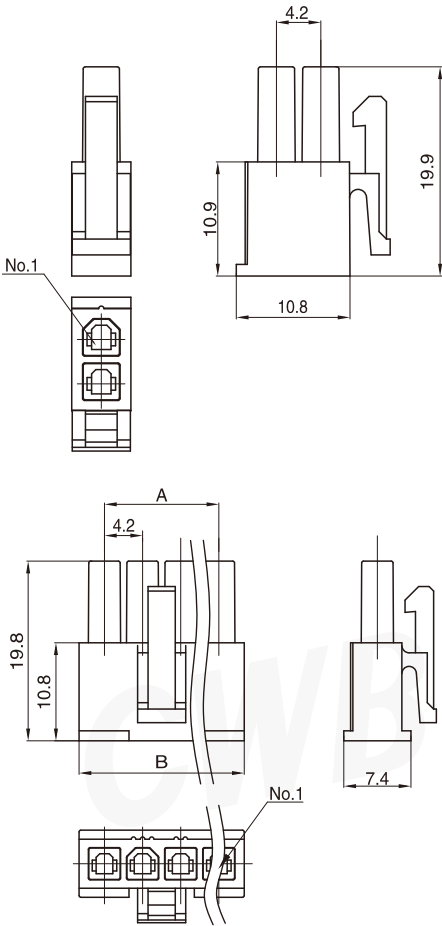


线数 Poles	型号 Type
2	TJC16-2x1Y
材质 Material	
PA66 UL94V-0	

线数 Poles	型号 Type	尺寸Dimensions(mm)	
		A	B
3	TJC16-3Y	8.4	14
4	TJC16-4Y	12.6	18.2
材质 Material		PA66 UL94V-0	


TJC16 (WTW) 型条形连接器
TJC16 (WTW) Bar Connector

间距 (space) :4.2mm

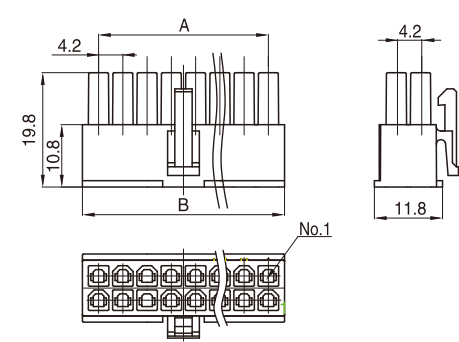


线数 Poles	型号 Type	尺寸Dimensions(mm)		线数 Poles	型号 Type	尺寸Dimensions(mm)	
		A	B			A	B
4	TJC16-2x2Y	4.2	9.8	16	TJC16-2x8Y	29.4	35.0
6	TJC16-2x3Y	8.4	14.0	18	TJC16-2x9Y	33.6	39.2
8	TJC16-2x4Y	12.6	18.2	20	TJC16-2x10Y	37.8	43.4
10	TJC16-2x5Y	16.8	22.4	22	TJC16-2x11Y	42.0	47.6
12	TJC16-2x6Y	21.0	26.6	24	TJC16-2x12Y	46.2	51.8
14	TJC16-2x7Y	25.2	30.8				
材质 Material				PA66 UL94V-0			

锁紧片 Retainer

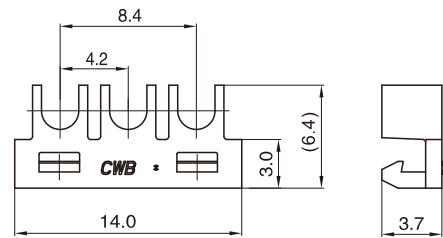


线数 Poles	型号 Type
3	TJC16B-3AS
材质 Material	
PA66 UL94 V-0	

孔座 (含锁紧片保持结构) Housing (W/Retainer)

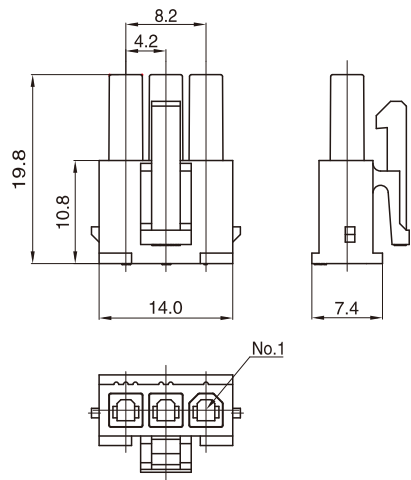

线数 Poles	型号 Type
3	TJC16B-3Y
材质 Material	
PA66 UL94 V-0	

锁紧片 Retainer

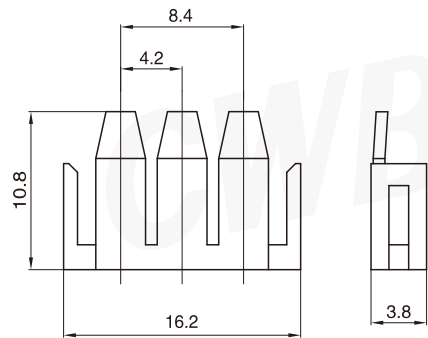


线数 Poles	型号 Type
3	TJC16B-2x3YS
材质 Material	
PA66 UL94V-0	

TJC16 (WTW) 型条形连接器
TJC16 (WTW) Bar Connector


间距 (space) :4.2mm

孔座 (含锁紧片保持结构) Housing (W/Retainer)

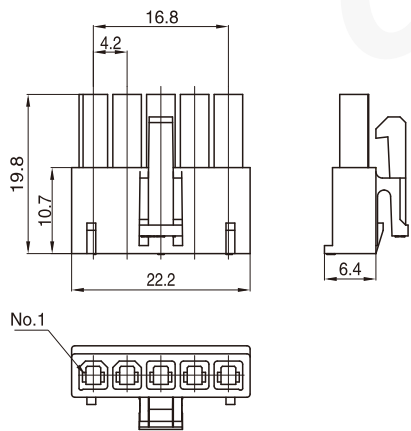


线数 Poles	型号 Type
5	TJC16B-5Y
材质 Material	
PA66 UL94V-0	

锁紧片 Retainer

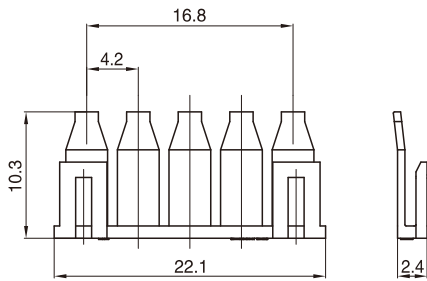

线数 Poles	型号 Type
5	TJC16B-5YS
材质 Material	
PA66 UL94 V-0	


孔座 (含锁紧片保持结构) Housing (W/Retainer)

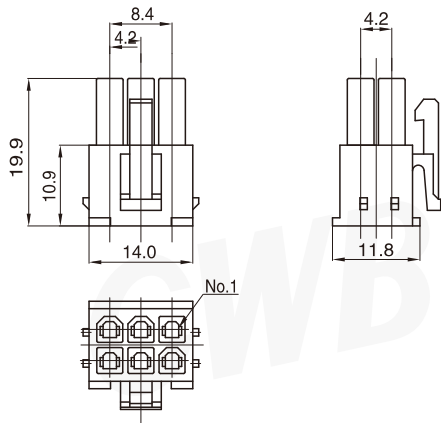


线数 Poles	型号 Type
6	TJC16B-2x3Y
材质 Material	
PA66 UL94V-0	

安装尺寸 Mounting Measurement

TJC16-2xnARP

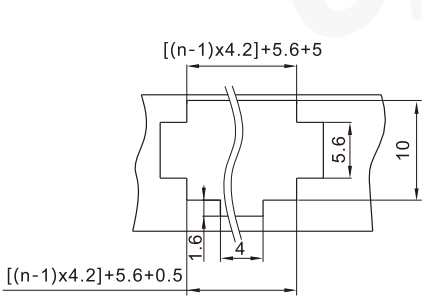

Panel Layout



Assembly View (DIM FYI)