

TJC2 型条形连接器
TJC2 Bar Connector


间距 (space) :7.5-5...5mm



技术参数 (SPECIFICATIONS)


适用线规 (Applicable wires) : AWG#26~AWG#20
适应基板厚度 (Applicable PC board thickness) : 1.6mm
温度范围 (Temprature range) : -25℃~85℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 3A
接触电阻 (Contact resistance) : ≤0.01Ω
绝缘电阻 (Insulation resistance) : ≥1000MΩ
耐压 (Withstand voltage) : 1500V AC/minute
认证 (STANDARDS) :  E200881

端子 TERMINAL



型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm²	AWG#	
CH-TJC2	0.13~0.5	26~20	1.3~1.8
材质 · 表面处理 Material and Finish			
磷青铜 镀锡 Phos · bronze Tin · Plated			

阴连接器 HOUSING

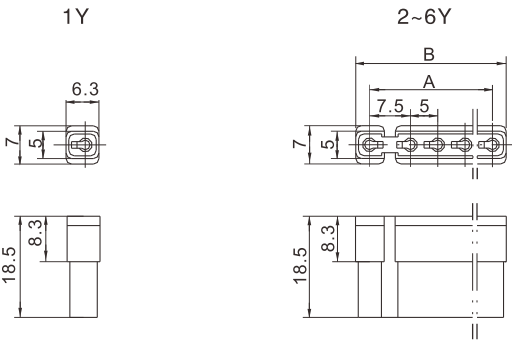


线数 Poles	型号 Type	尺寸Dimensions(mm)	
		A	B
1	TJC2-1Y	/	/
2	TJC2-2Y	7.5	12.5
3	TJC2-3Y	12.5	17.5
4	TJC2-4Y	17.5	22.5
5	TJC2-5Y	22.5	27.5
6	TJC2-6Y	27.5	32.5
7	TJC2-7Y	32.5	37.5
材质 · 表面处理 Material and Finish		PA66 UL94V-0 PA66 UL94V-2	

TJC2 型条形连接器
TJC2 Bar Connector


间距 (space) :7.5–5...5mm

阳连接器 HEADER

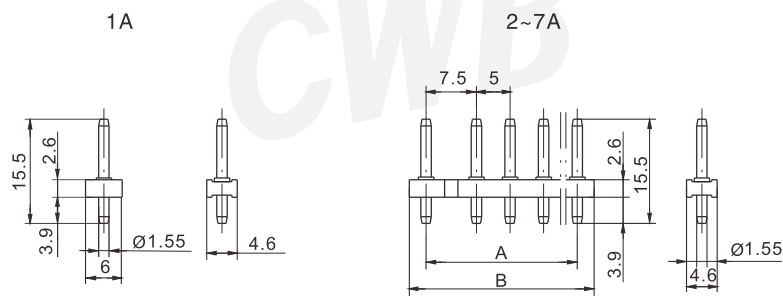


线数 Poles	型号 Type	尺寸Dimensions(mm)	
		A	B
1	TJC2-1A	/	/
2	TJC2-2A	7.5	12.5
3	TJC2-3A	12.5	17.5
4	TJC2-4A	17.5	22.5
5	TJC2-5A	22.5	27.5
6	TJC2-6A	27.5	32.5
7	TJC2-7A	32.5	37.5
材质・表面处理 Material and Finish PA66 UL94V-0; 黄铜 镀锡 Brass Tin・Plated			

安装尺寸 MOUNTING MEASUREMENT



PCB Layout

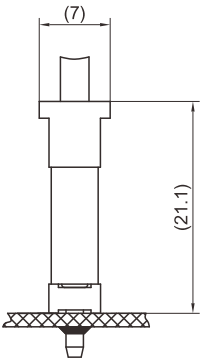

Assembly View (DIM FYI)