





技术参数 (Specifications)

适用线规 (Applicable wires) : AWG#28~AWG#22
适应基板厚度 (Applicable PC board thickness) : 1.2~1.6 mm
温度范围 (Temperature range) : -25℃~85℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 3A
接触电阻 (Contact resistance) : $\leq 10\text{m}\Omega$
绝缘电阻 (Insulation resistance) : $\geq 1000\text{M}\Omega$
耐压 (Withstand voltage) : 800V AC/minute


认证 (Standards) :  E200881

插簧 (A型) Contact (Type A)

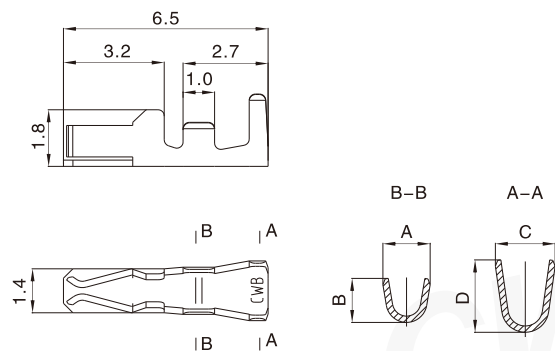


型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis	尺寸 Dimensions (mm)			
	mm ²	AWG#		A	B	C	D
CH-TJC2004A	0.12 ~ 0.20	26 ~ 24	1.3 ~ 1.4	1.50	1.40	1.90	2.30
CH-TJC2004A-1	0.20 ~ 0.33	24 ~ 22	1.4 ~ 1.6	1.55	1.60	1.90	2.30
CH-TJC2004A-2	0.08	28	1.2	1.20	1.10	1.85	1.85
材质 · 表面处理 Material and Finish							
磷青铜 镀锡 Phos · bronze Tin · Plated							

插簧 (B型) Contact (Type B)

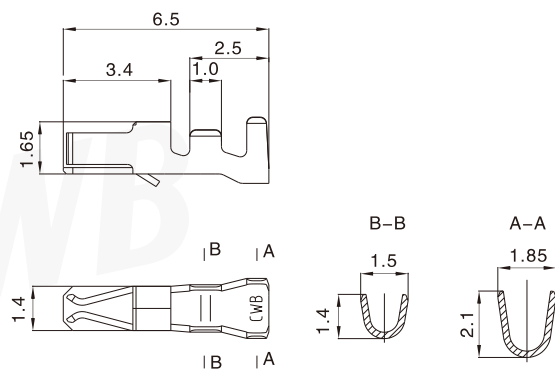


型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm²	AWG#	
CH-TJC2004B	0.08 ~ 0.12	28 ~ 26	1.2 ~ 1.3
材质・表面处理 Material and Finish			
磷青铜 镀锡 Phos・bronze Tin・Plated			

插簧 (C型) Contact (Type C)

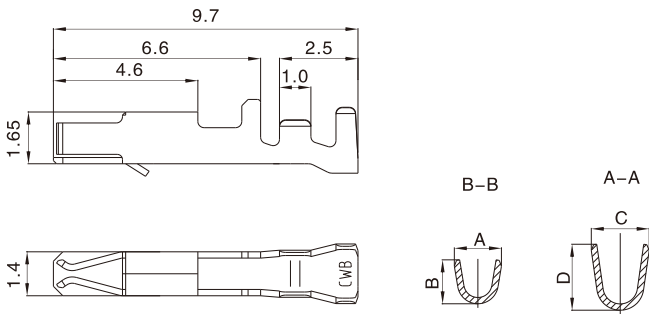

型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis	尺寸 Dimensions (mm)			
	mm²	AWG#		A	B	C	D
CH-TJC2004C	0.12 ~ 0.20	26 ~ 24	1.3 ~ 1.4	1.50	1.40	1.85	2.10
CH-TJC2004C-1	0.33	22	1.6	1.55	1.60	1.85	2.10
材质・表面处理 Material and Finish							
磷青铜 镀锡 Phos・bronze Tin・Plated							

孔座 (A型) Housing (Type A)

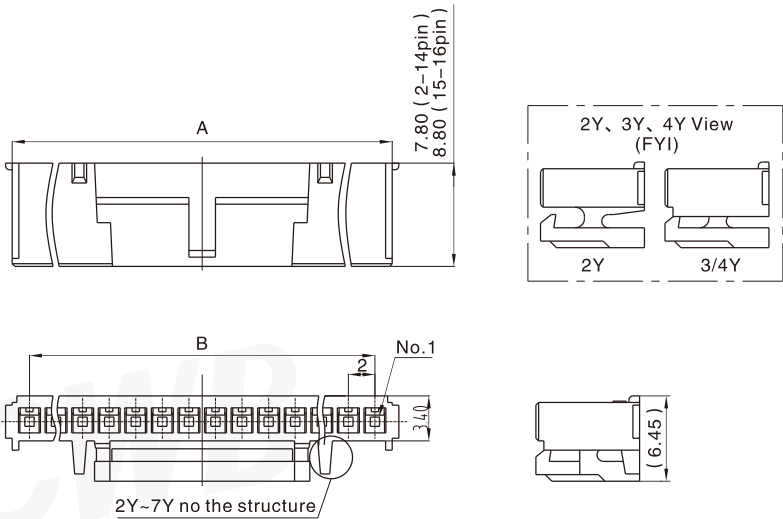


TJC2004 型条形连接器
TJC2004 Bar Connector

间距 (space) :2.0mm


线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
2	TJC2004-2Y	4.7	2
3	TJC2004-3Y	6.7	4
4	TJC2004-4Y	8.7	6
5	TJC2004-5Y	10.7	8
6	TJC2004-6Y	12.7	10
7	TJC2004-7Y	14.7	12
8	TJC2004-8Y	16.7	14
9	TJC2004-9Y	18.7	16
10	TJC2004-10Y	20.7	18
11	TJC2004-11Y	22.7	20
12	TJC2004-12Y	24.7	22
13	TJC2004-13Y	26.7	24
14	TJC2004-14Y	28.7	26
15	TJC2004-15Y	30.7	28
16	TJC2004-16Y	32.7	30
材质 Material			
PA66 UL94 V-0			

孔座 (B型) Housing (Type B)

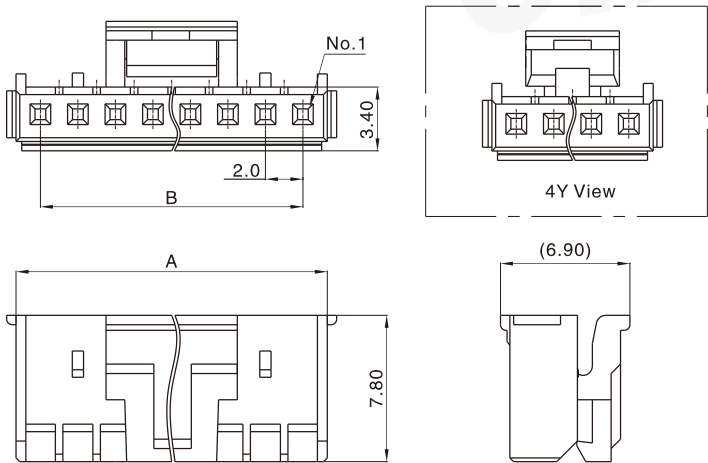


线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
4	TJC2004B-4Y	8.7	6
8	TJC2004B-8Y	16.7	14
材质 Material			
PA66 UL94 V-0			

孔座 (C型) Housing (Type C)

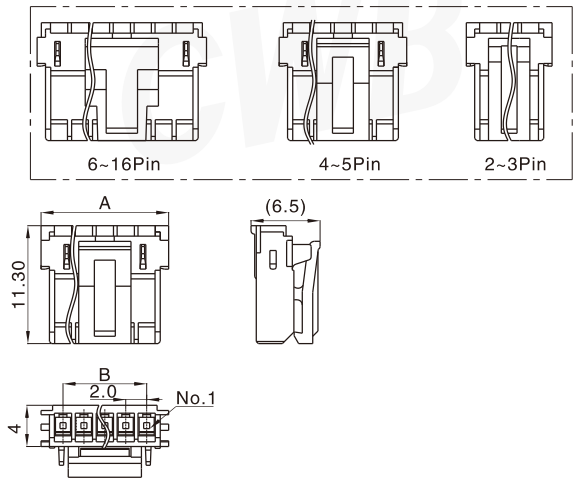

线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
2	TJC2004C-2Y	6.2	2
3	TJC2004C-3Y	8.2	4
4	TJC2004C-4Y	10.2	6
5	TJC2004C-5Y	12.2	8
8	TJC2004C-8Y	18.2	14
10	TJC2004C-10Y	22.2	18
12	TJC2004C-12Y	26.2	22
16	TJC2004C-16Y	34.2	30
材质 Material			
PA66 UL94 V-0			


锁紧片 (B型) Retainer (Type B)

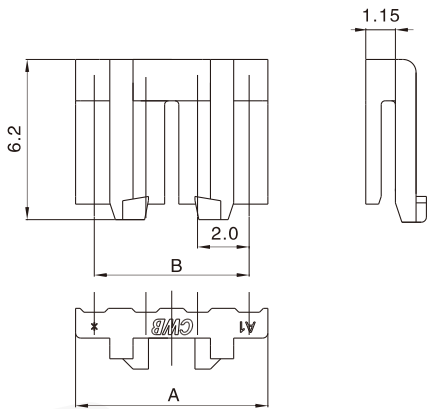

线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
4	TJC2004B-4YS	7.45	6
材质 Material			
PA66+GF UL94 V-0			


TJC2004 型条形连接器
TJC2004 Bar Connector

间距 (space) :2.0mm

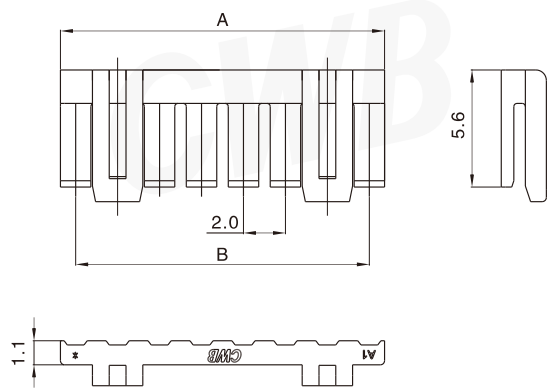

线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
8	TJC2004B-8YS	15.6	14
材质 Material			
PA66+GF UL94 V-0			

锁紧片 (C型) Retainer (Type C)

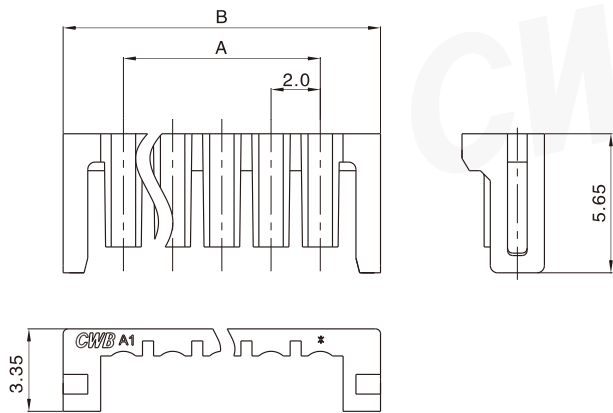


线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
2	TJC2004C-2YS	2	6.9
3	TJC2004C-3YS	4	8.9
4	TJC2004C-4YS	6	10.9
5	TJC2004C-5YS	8	12.9
8	TJC2004C-8YS	14	18.9
10	TJC2004C-10YS	18	22.9
12	TJC2004C-12YS	22	26.9
16	TJC2004C-16YS	30	34.9
材质 Material			
PA66+GF UL94 V-0			

TJC2004 型条形连接器
TJC2004 Bar Connector


间距 (space) :2.0mm

阳连接器 (立式, 直插) Header (V, DIP)

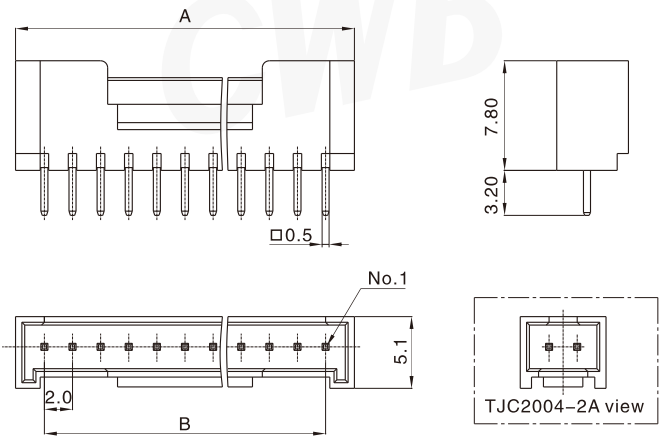

线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
2	TJC2004-2A	6	2
3	TJC2004-3A	8	4
4	TJC2004-4A	10	6
5	TJC2004-5A	12	8
6	TJC2004-6A	14	10
7	TJC2004-7A	16	12
8	TJC2004-8A	18	14
9	TJC2004-9A	20	16
10	TJC2004-10A	22	18
11	TJC2004-11A	24	20
12	TJC2004-12A	26	22
13	TJC2004-13A	28	24
14	TJC2004-14A	30	26
15	TJC2004-15A	32	28
16	TJC2004-16A	34	30
材质 · 表面处理 Material and Finish			
PA66 UL94 V-0; 黄铜 镀锡 Brass Tin · Plated			

阳连接器 (立式, 直插, 带定位柱) Header (V, DIP, W/boss)

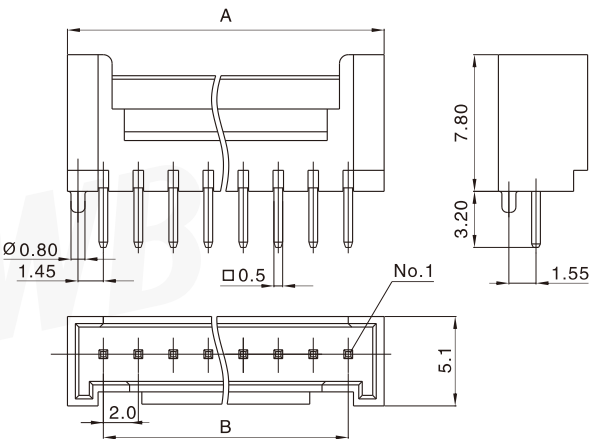


TJC2004 型条形连接器
TJC2004 Bar Connector

间距 (space) :2.0mm

线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
5	TJC2004-5AD	12	8
8	TJC2004-8AD	18	14
9	TJC2004-9AD	20	16
10	TJC2004-10AD	22	18
材质・表面处理 Material and Finish			
PA66 UL94 V-0; 黄铜 镀锡 Brass Tin・Plated			

阳连接器 (卧式，直插，带挡板) Header (H, DIP, W/PCB stabilizer)

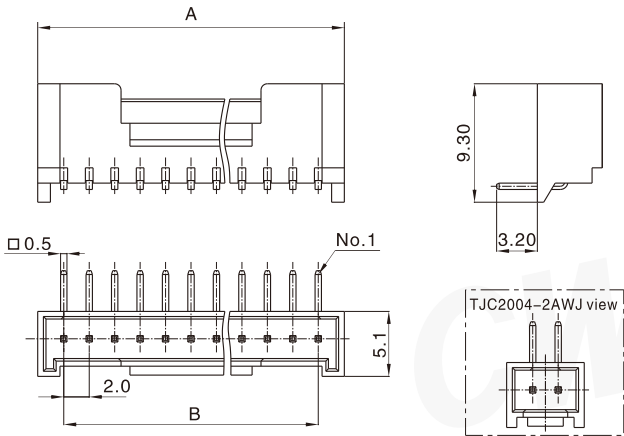


线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
2	TJC2004-2AWJ	6	2
3	TJC2004-3AWJ	8	4
4	TJC2004-4AWJ	10	6
5	TJC2004-5AWJ	12	8
6	TJC2004-6AWJ	14	10
7	TJC2004-7AWJ	16	12
8	TJC2004-8AWJ	18	14
9	TJC2004-9AWJ	20	16
10	TJC2004-10AWJ	22	18
11	TJC2004-11AWJ	24	20
12	TJC2004-12AWJ	26	22
13	TJC2004-13AWJ	28	24
14	TJC2004-14AWJ	30	26
15	TJC2004-15AWJ	32	28
16	TJC2004-16AWJ	34	30
材质・表面处理 Material and Finish			
PA66 UL94 V-0; 黄铜 镀锡 Brass Tin・Plated			

TJC2004 型条形连接器
TJC2004 Bar Connector


间距 (space) :2.0mm

阳连接器 (卧式，直插，带挡板) Header (H, DIP, W/PCB stabilizer)

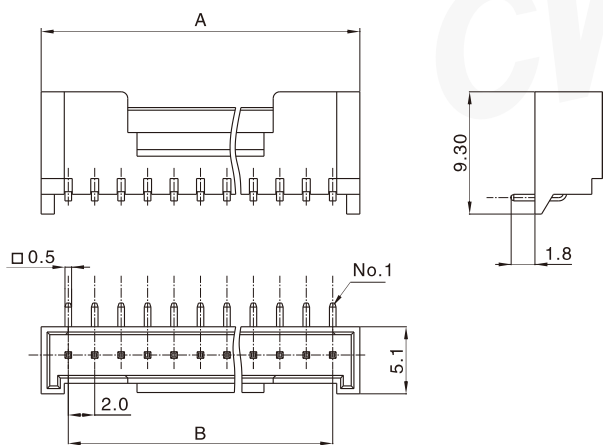

线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
6	TJC2004-6AWJ1.8	14	10
材质 · 表面处理 Material and Finish			
PA66 UL94 V-0; 黄铜 镀锡 Brass Tin · Plated			

阳连接器 (立式，表面装贴，带吸嘴盖) Header (V, SMT, With cover)

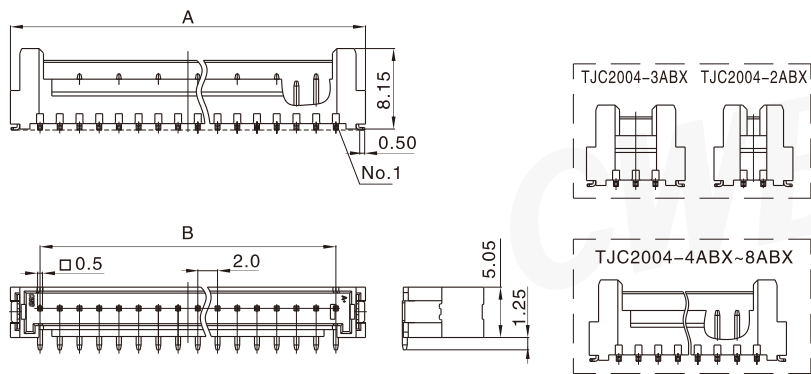


线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
2	TJC2004-2ABX	8	2
3	TJC2004-3ABX	10	4
4	TJC2004-4ABX	12	6
5	TJC2004-5ABX	14	8
6	TJC2004-6ABX	16	10
7	TJC2004-7ABX	18	12
8	TJC2004-8ABX	20	14
9	TJC2004-9ABX	22	16
10	TJC2004-10ABX	24	18
11	TJC2004-11ABX	26	20
12	TJC2004-12ABX	28	22
13	TJC2004-13ABX	30	24
14	TJC2004-14ABX	32	26
15	TJC2004-15ABX	34	28
16	TJC2004-16ABX	36	30
材质 · 表面处理 Material and Finish			
PA+GF UL94 V-0; 黄铜 镀锡 Brass Tin · Plated			

TJC2004 型条形连接器
TJC2004 Bar Connector


间距 (space) :2.0mm

阳连接器 (卧式，表面装贴，带挡板) Header (H, SMT, W/PCB stabilizer)

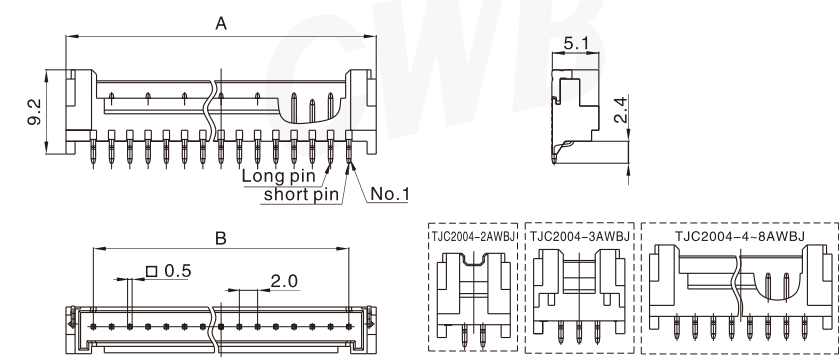

线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
2	TJC2004-2AWBJ	8	2
3	TJC2004-3AWBJ	10	4
4	TJC2004-4AWBJ	12	6
5	TJC2004-5AWBJ	14	8
6	TJC2004-6AWBJ	16	10
7	TJC2004-7AWBJ	18	12
8	TJC2004-8AWBJ	20	14
9	TJC2004-9AWBJ	22	16
10	TJC2004-10AWBJ	24	18
11	TJC2004-11AWBJ	26	20
12	TJC2004-12AWBJ	28	22
13	TJC2004-13AWBJ	30	24
14	TJC2004-14AWBJ	32	26
15	TJC2004-15AWBJ	34	28
16	TJC2004-16AWBJ	36	30
材质 · 表面处理 Material and Finish			
PA+GF UL94 V-0; 黄铜 镀锡 Brass Tin · Plated			

阳连接器 (卧式，表面装贴，带挡板) Header (H, SMT, W/PCB stabilizer)


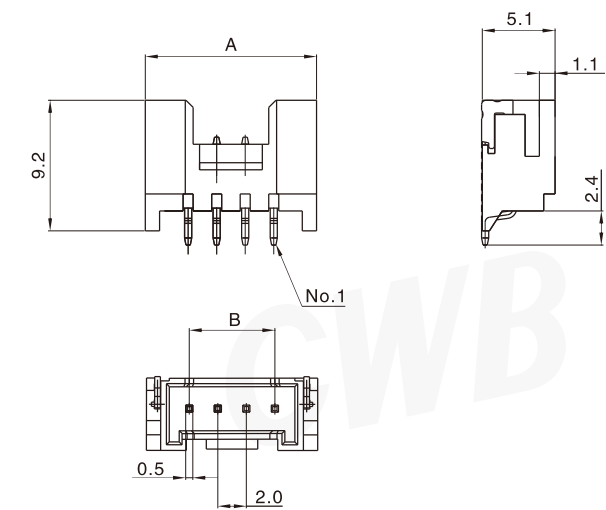


线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
4	TJC2004D-4AWBJ	12	6
材质 · 表面处理 Material and Finish			
PA+GF UL94 V-0; 黄铜 镀锡 Brass Tin · Plated			

TJC2004 型条形连接器
TJC2004 Bar Connector

间距 (space) :2.0mm


阳连接器 (卧式，表面装贴，带挡板) Header (H, SMT, W/PCB stabilizer)

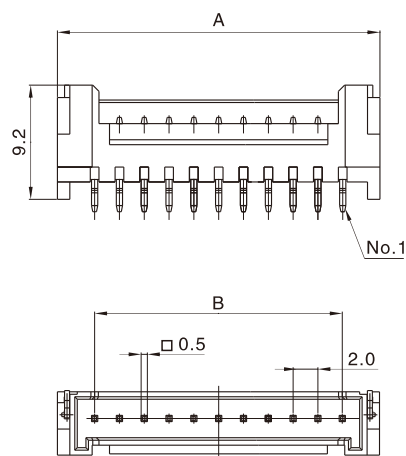


线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
11	TJC2004-11AWBJ-3	26	20
材质 · 表面处理 Material and Finish			
PA+GF UL94 V-0; 黄铜 镀锡 Brass Tin · Plated			

安装尺寸 Mounting Measurement


TJC2004-nA

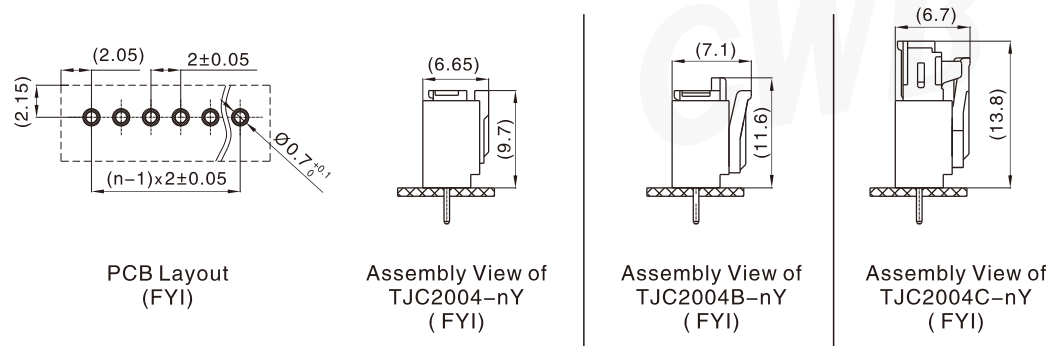


TJC2004-nAD

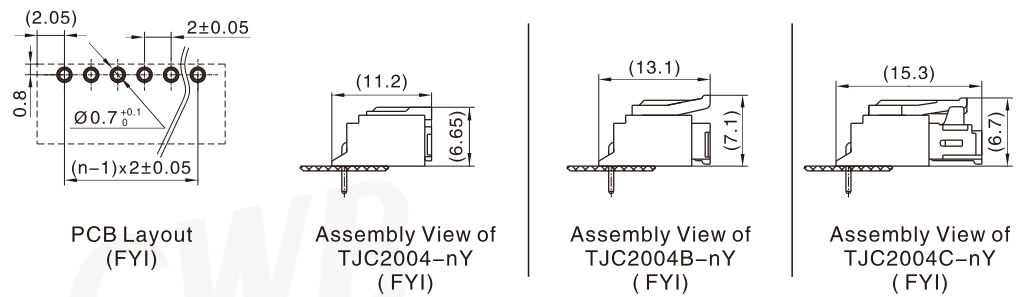


TJC2004-nAWJ

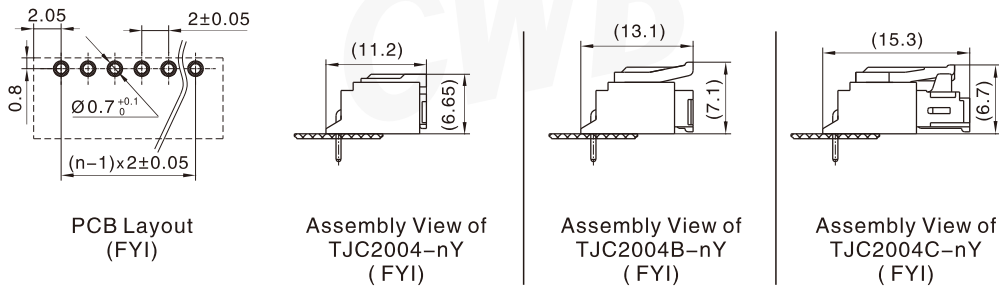


TJC2004-6AWJ1.8

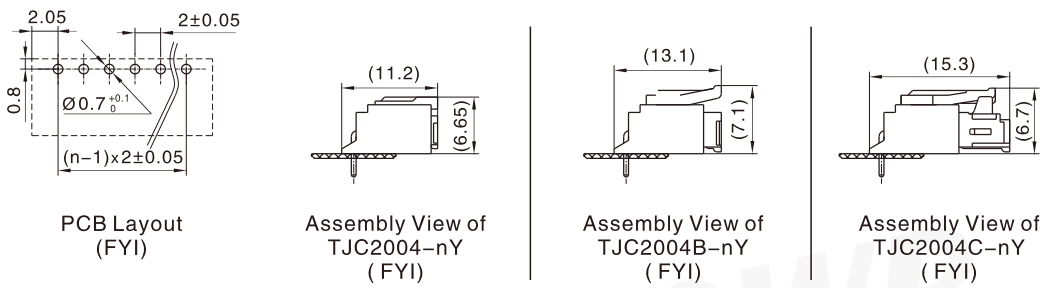


TJC2004-nABX

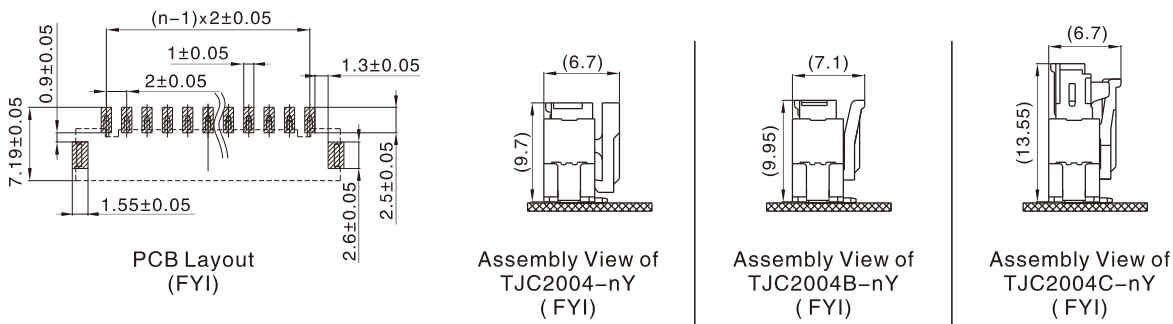


TJC2004-nAWBJ

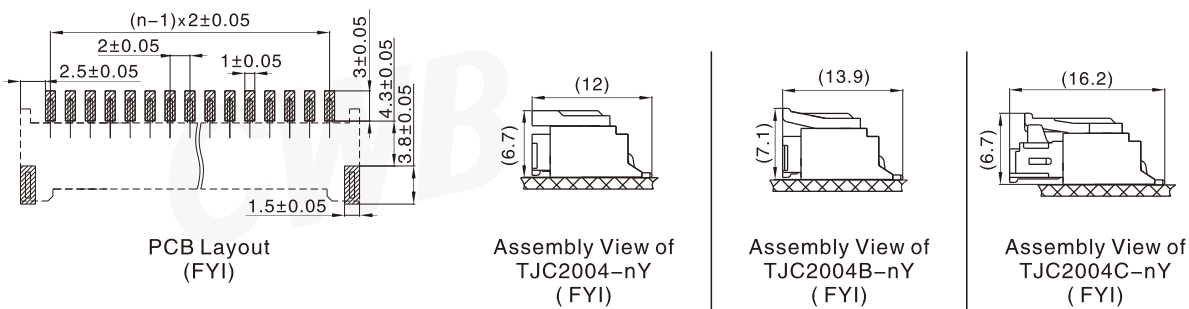


TJC2004D-4AWBJ

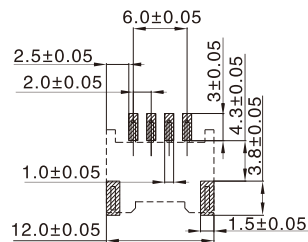


PCB Layout
(FYI)



Assembly View of
TJC2004-nY
(FYI)




Assembly View of
TJC2004B-nY
(FYI)




Assembly View of
TJC2004C-nY
(FYI)


TJC2004-11AWBJ-3

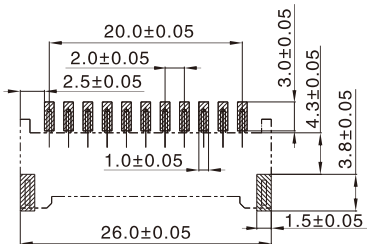


PCB Layout
(FYI)



Assembly View of
TJC2004-nY
(FYI)



Assembly View of
TJC2004B-nY
(FYI)



Assembly View of
TJC2004C-nY
(FYI)