



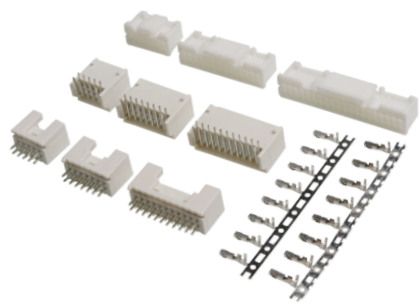

技术参数 (Specifications)


- 适用线规 (Applicable wires) : AWG#28~ AWG#22
- 适应基板厚度 (Applicable PC board thickness) : 1.6 mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 250V AC/DC
- 额定电流 (Current rating) : 3A
- 接触电阻 (Contact resistance) : ≤10mΩ
- 绝缘电阻 (Insulation resistance) : ≥1000MΩ
- 耐电压 (Withstand voltage) : 800V AC/minute

插簧 Contact

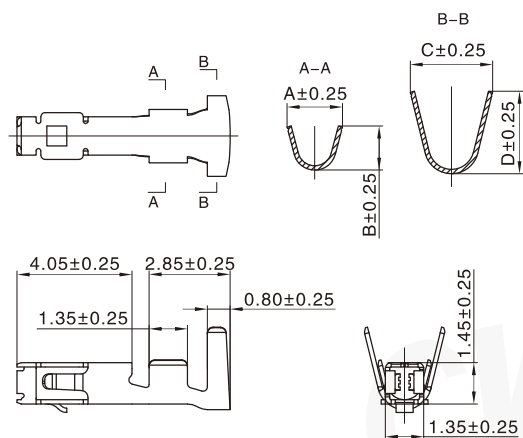

型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis	尺寸 Dimensions (mm)			
	mm²	AWG#		A	B	C	D
CH-TJC20084	0.22 ~ 0.33	24 ~ 22	1.4 ~ 1.5	1.95	1.55	2.9	2.9
CH-TJC20084-1	0.08 ~ 0.13	28 ~ 26	0.76 ~ 1.3	1.5	1.3	2.1	2.1
材质・表面处理 Material and Finish							
磷青铜 镀锡 Phos・bronze Tin・Plated							

孔座 Housing

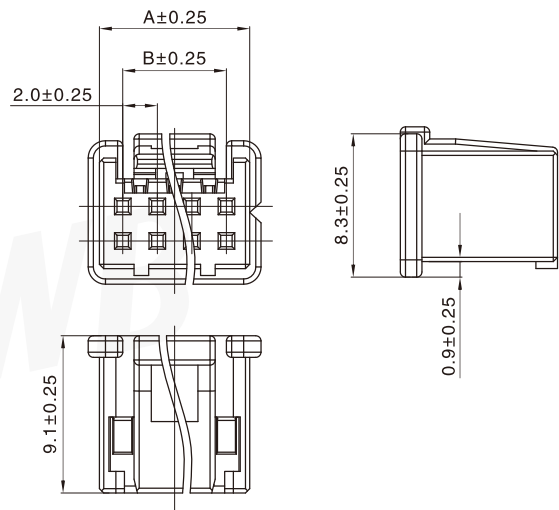


TJC20084 型条形连接器
TJC20084 Bar Connector

间距 (space) :2.0mm


线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
8	TJC20084-2 × 4Y	8.70	6.00
10	TJC20084-2 × 5Y	10.70	8.00
12	TJC20084-2 × 6Y	12.70	10.00
14	TJC20084-2 × 7Y	14.70	12.00
16	TJC20084-2 × 8Y	16.70	14.00
18	TJC20084-2 × 9Y	18.70	16.00
20	TJC20084-2 × 10Y	20.70	18.00
22	TJC20084-2 × 11Y	22.70	20.00
24	TJC20084-2 × 12Y	24.70	22.00
26	TJC20084-2 × 13Y	26.70	24.00
28	TJC20084-2 × 14Y	28.70	26.00
30	TJC20084-2 × 15Y	30.70	28.00
32	TJC20084-2 × 16Y	32.70	30.00
34	TJC20084-2 × 17Y	34.70	32.00
36	TJC20084-2 × 18Y	36.70	34.00
38	TJC20084-2 × 19Y	38.70	36.00
40	TJC20084-2 × 20Y	40.70	38.00
材质 Material			
PA66 UL94V-0			

阳连接器 (立式，直插) Header (V, DIP)

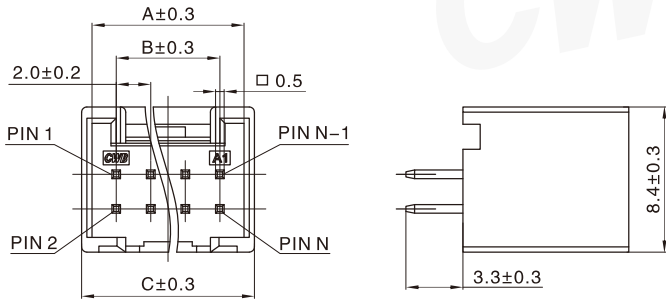


线数 Poles	型号 Type	尺寸 Dimensions (mm)		
		A	B	C
8	TJC20084-2x4A	8.80	6.00	10.0
10	TJC20084-2x5A	10.8	8.00	12.0
12	TJC20084-2x6A	12.8	10.00	14.0
14	TJC20084-2x7A	14.8	12.00	16.0
16	TJC20084-2x8A	16.8	14.00	18.0
18	TJC20084-2x9A	18.8	16.00	20.0
20	TJC20084-2x10A	20.8	18.00	22.0
22	TJC20084-2x11A	22.8	20.00	24.0
24	TJC20084-2x12A	24.8	22.00	26.0
26	TJC20084-2x13A	26.8	24.00	28.0
28	TJC20084-2x14A	28.8	26.00	30.0
材质 · 表面处理 Material and Finish				
PA66+GF UL94V-0; 黄铜 镀锡 Brass Tin · Plated				

阳连接器 (立式，直插，带定位柱) Header (V, DIP, W/Boss)

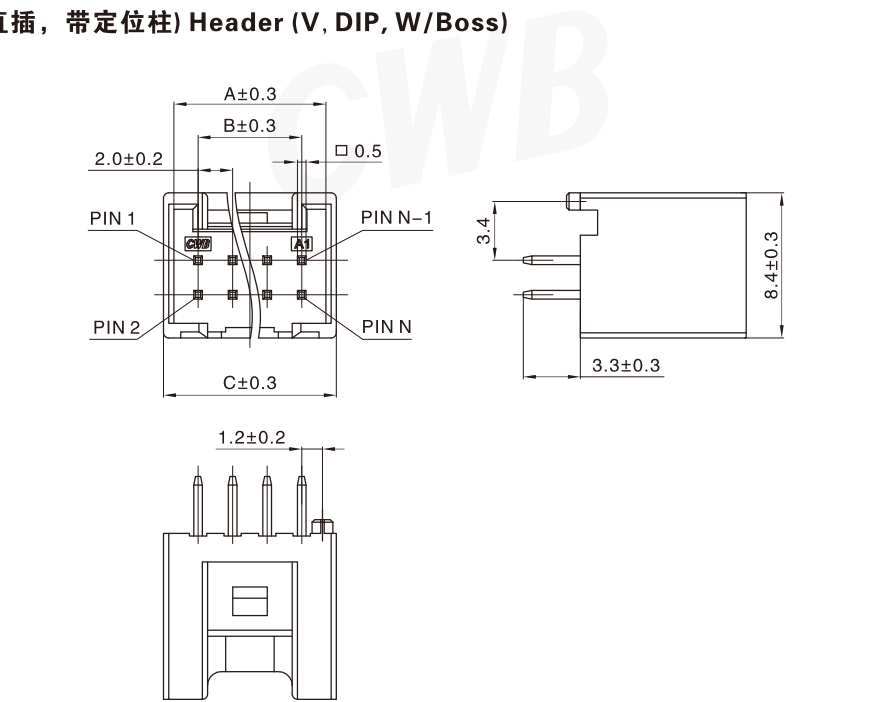


线数 Poles	型号 Type	尺寸 Dimensions (mm)		
		A	B	C
8	TJC20084-2x4AD	8.80	6.00	10.0
10	TJC20084-2x5AD	10.8	8.00	12.0
12	TJC20084-2x6AD	12.8	10.00	14.0
14	TJC20084-2x7AD	14.8	12.00	16.0
16	TJC20084-2x8AD	16.8	14.00	18.0
18	TJC20084-2x9AD	18.8	16.00	20.0
20	TJC20084-2x10AD	20.8	18.00	22.0
22	TJC20084-2x11AD	22.8	20.00	24.0
24	TJC20084-2x12AD	24.8	22.00	26.0
26	TJC20084-2x13AD	26.8	24.00	28.0
28	TJC20084-2x14AD	28.8	26.00	30.0
材质 · 表面处理 Material and Finish				
PA66+GF UL94V-0; 黄铜 镀锡 Brass Tin · Plated				

阳连接器 (卧式，直插，带挡板，含定位柱) Header(H, DIP, W/PCB stabilizer, W/Boss)

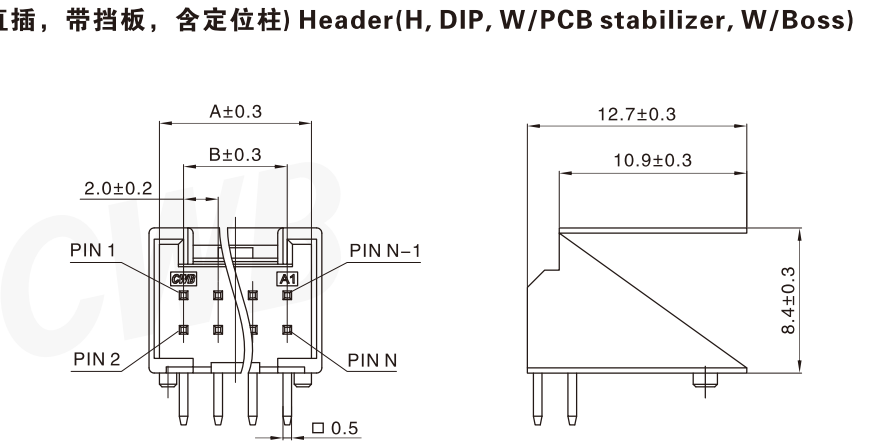

线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
8	TJC20084-2 × 4AWJD	8.80	6.00
10	TJC20084-2 × 5AWJD	10.80	8.00
12	TJC20084-2 × 6AWJD	12.80	10.00
14	TJC20084-2 × 7AWJD	14.80	12.00
16	TJC20084-2 × 8AWJD	16.80	14.00
18	TJC20084-2 × 9AWJD	18.80	16.00
20	TJC20084-2 × 10AWJD	20.80	18.00
22	TJC20084-2 × 11AWJD	22.80	20.00
24	TJC20084-2 × 12AWJD	24.80	22.00
26	TJC20084-2 × 13AWJD	26.80	24.00
28	TJC20084-2 × 14AWJD	28.80	26.00
30	TJC20084-2 × 15AWJD	30.80	28.00
32	TJC20084-2 × 16AWJD	32.80	30.00
34	TJC20084-2 × 17AWJD	34.80	32.00
36	TJC20084-2 × 18AWJD	36.80	34.00
38	TJC20084-2 × 19AWJD	38.80	36.00
40	TJC20084-2 × 20AWJD	40.80	38.00
材质 · 表面处理 Material and Finish			
PA66+GF UL94V-0; 黄铜 镀锡 Brass Tin · Plated			

安装尺寸 Mounting Measurement

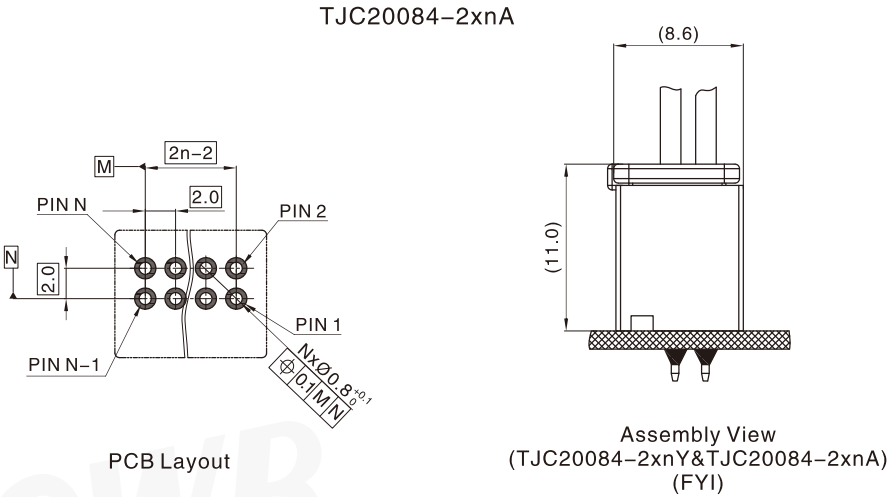

TJC20084 型条形连接器
TJC20084 Bar Connector

间距 (space) :2.0mm

