


TJC20091 型条形连接器
TJC20091 Bar Connector


间距 (space) :2.0mm

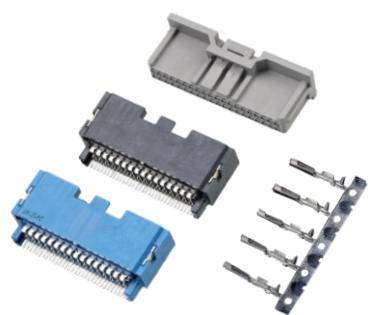

技术参数 (Specifications)



适用线规 (Applicable wires): AWG#24~AWG#22
适应基板厚度(Applicable PC board thickness): 1.2~1.6 mm
温度范围 (Temperature range): -40C~105C
额定电压(Voltage rating): 60V AC/DC
额定电流(Currentrating): 3A
接触电阻(Contact resistance): <25mQ
绝缘电阻 (Insulation resistance):>100MQ
耐压(Withstand voltage): 500V AC/minute

插簧 Contact

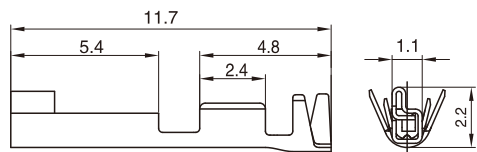


型号 Type	适用导线范围 Wire Range		导线外径(mm) Wire ins.Dis
	mm²	AWG#	
CH-TJC20074	0.35	22	1.2
CH-TJC20074-1	0.22	24	1.0
材质・表面处理 Material and Finish			
铜合金镀锡 Copper alloy Tin・Plated			


阴连接器 Housing

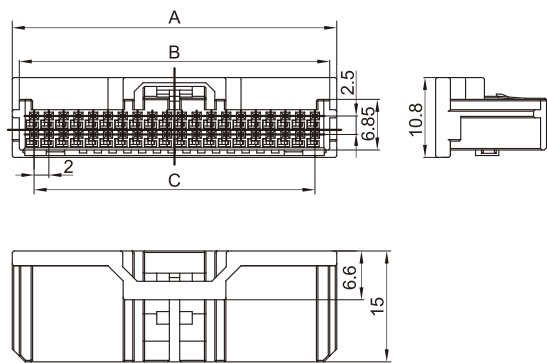


TJC20091-2xnAWB 白色



TJC20091B-2xnAWB 黑色

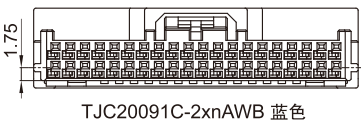


TJC20091C-2xnAWB 蓝色



TJC20091D-2xnAWB 灰色

线数 Poles	型号 Type	尺寸Dimensions (mm)			线数 Poles	型号 Type	尺寸Dimensions (mm)		
		A	B	C			A	B	C
16	TJC20091-2 × 8Y Assy	19.9	18	14	32	TJC20091-2 × 16Y Assy	35.9	34	30
	TJC20091B-2 × 8Y Assy					TJC20091B-2 × 16Y Assy			
	TJC20091C-2 × 8Y Assy					TJC20091C-2 × 16Y Assy			
	TJC20091D-2 × 8Y Assy					TJC20091D-2 × 16Y Assy			
20	TJC20091-2 × 10Y Assy	23.9	22	18	36	TJC20091-2 × 18Y Assy	39.9	38	34
	TJC20091B-2 × 10Y Assy					TJC20091B-2 × 18Y Assy			
	TJC20091C-2 × 10Y Assy					TJC20091C-2 × 18Y Assy			
	TJC20091D-2 × 10Y Assy					TJC20091D-2 × 18Y Assy			
24	TJC20091-2 × 12Y Assy	27.9	26	22	40	TJC20091-2 × 20Y Assy	43.9	42	38
	TJC20091B-2 × 12Y Assy					TJC20091B-2 × 20Y Assy			
	TJC20091C-2 × 12Y Assy					TJC20091C-2 × 20Y Assy			
	TJC20091D-2 × 12Y Assy					TJC20091D-2 × 20Y Assy			
28	TJC20091-2 × 14Y Assy	31.9	30	26					
	TJC20091B-2 × 14Y Assy								
	TJC20091C-2 × 14Y Assy								
	TJC20091D-2 × 14Y Assy								
材质 Material Socket Housing:PA66 UL94V-0 Locking: PA66 UL94 V-0									

阳连接器 Header (H,SMT)

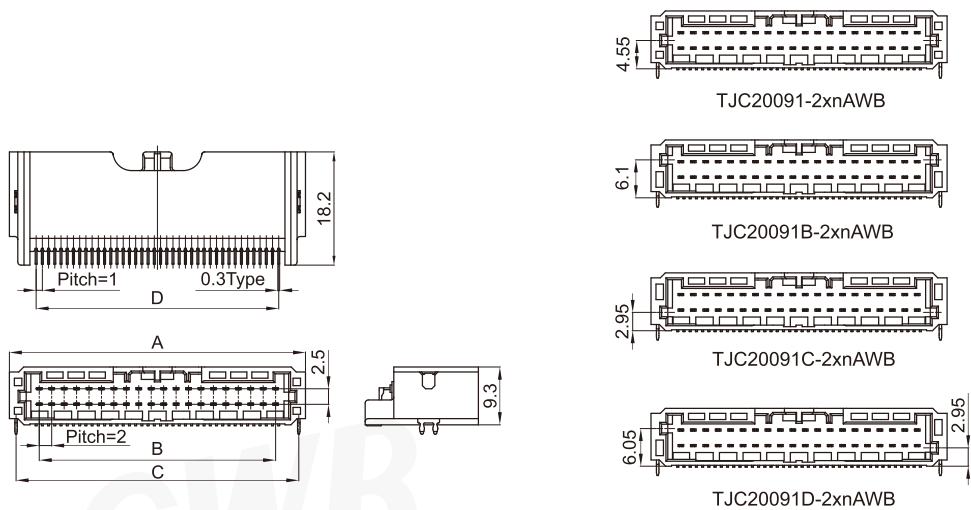


TJC20091 型条形连接器
TJC20091 Bar Connector

间距 (space) :2.0mm

线数 Poles	型号 Type	尺寸Dimensions (mm)				线数 Poles	型号 Type	尺寸Dimensions (mm)			
		A	B	C	D			A	B	C	D
16	TJC20091-2 × 8AWB	23.6	14	21.45	15	32	TJC20091-2 × 16AWB	39.6	30	37.45	31
	TJC20091B-2 × 8AWB						TJC20091B-2 × 16AWB				
	TJC20091C-2 × 8AWB						TJC20091C-2 × 16AWB				
	TJC20091D-2 × 8AWB						TJC20091D-2 × 16AWB				
20	TJC20091-2 × 10AWB	27.6	18	25.45	19	36	TJC20091-2 × 18AWB	43.6	34	41.45	35
	TJC20091B-2 × 10AWB						TJC20091B-2 × 18AWB				
	TJC20091C-2 × 10AWB						TJC20091C-2 × 18AWB				
	TJC20091D-2 × 10AWB						TJC20091D-2 × 18AWB				
24	TJC20091-2 × 12AWB	31.6	22	29.45	23	40	TJC20091-2 × 20AWB	47.6	38	45.45	39
	TJC20091B-2 × 12AWB						TJC20091B-2 × 20AWB				
	TJC20091C-2 × 12AWB						TJC20091C-2 × 20AWB				
	TJC20091D-2 × 12AWB						TJC20091D-2 × 20AWB				
28	TJC20091-2 × 14AWB	35.6	26	33.45	27						
	TJC20091B-2 × 14AWB										
	TJC20091C-2 × 14AWB										
	TJC20091D-2 × 14AWB										
材质・表面处理 Materialand Finish LCP UL94V-0; 黄铜 镀锡 Brass Tin・Plated											

安装尺寸 Mounting Measurement

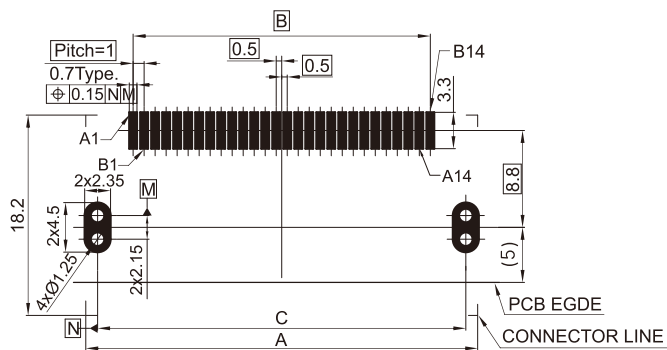

PCB Layout

线数 Poles	尺寸Dimensions (mm)		
	A	B	C
16	23.6	15	21.45
20	27.6	19	25.45
24	31.6	23	29.45
28	35.6	27	33.45
32	39.6	31	37.45
36	43.6	35	41.45
40	47.6	39	45.45