


技术参数 (Specifications)


- 适用线规 (Applicable wires) : AWG#22
- 适应基板厚度 (Applicable PC board thickness) : 1.6 mm
- 温度范围 (Temperature range) : -40℃~85℃
- 额定电压 (Voltage rating) : 100V AC/DC
- 额定电流 (Current rating) : 3A (AWG#22)
- 接触电阻 (Contact resistance) : ≤10mΩ
- 绝缘电阻 (Insulation resistance) : ≥100MΩ
- 耐电压 (Withstand voltage) : 1000V AC/minute

插簧 Contact

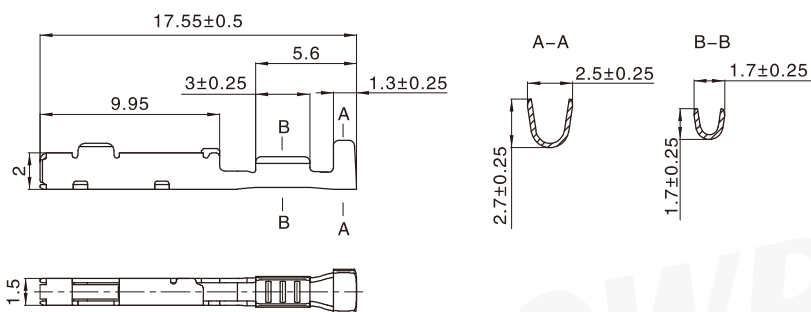

型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm ²	AWG#	
CH-TJC22002	0.35	FLRY-A 0.35mm ² (AWG#22)	1.25
材质・表面处理 Material and Finish			
铜合金 镀锡 Copper alloy Tin・Plated			

孔座 Housing

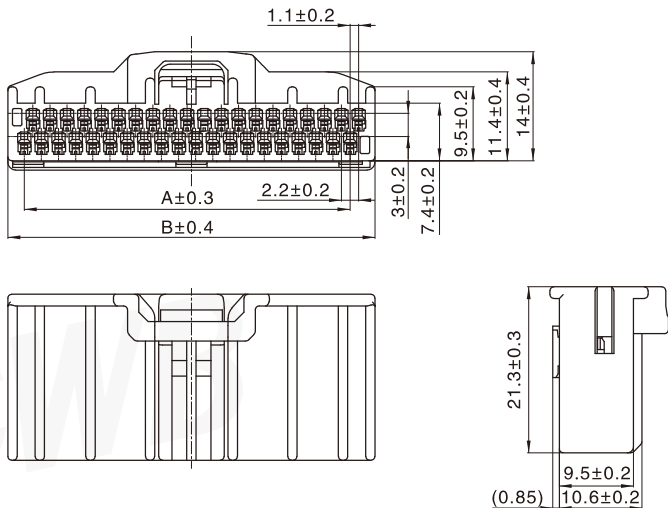


TJC22002 型条形连接器
TJC22002 Bar Connector

间距 (space) :2.2mm

线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
16	TJC22002-2 × 8Y ASSY	15.4	20.7
20	TJC22002-2 × 10Y ASSY	19.8	25.1
24	TJC22002-2 × 12Y ASSY	24.2	29.5
28	TJC22002-2 × 14Y ASSY	28.6	33.9
32	TJC22002-2 × 16Y ASSY	33	38.3
36	TJC22002-2 × 18Y ASSY	37.4	42.7
40	TJC22002-2 × 20Y ASSY	41.8	47.1
材质 Material		PA66 UL94 V-0	

阳连接器 (卧式，直插) Header (H, DIP)

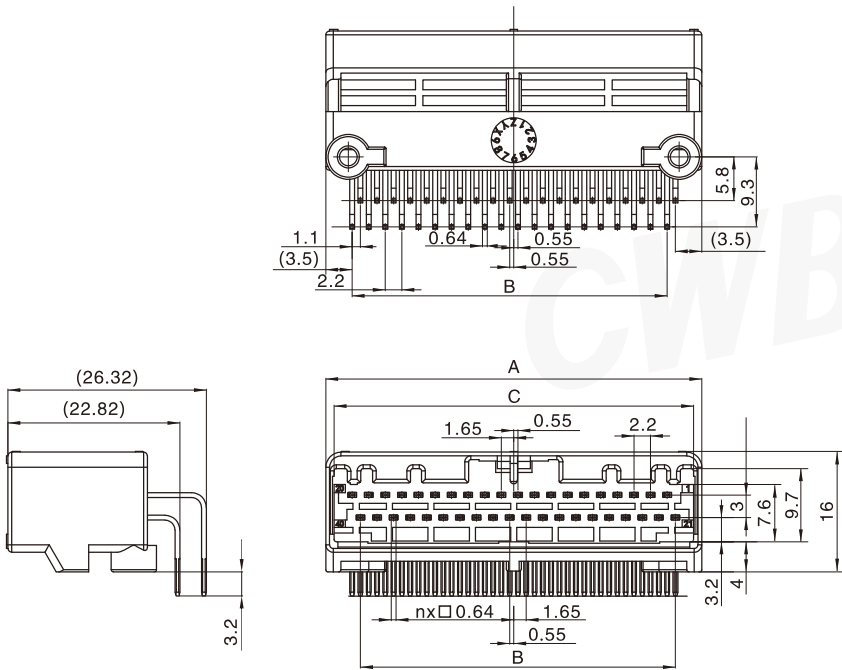

线数 Poles	型号 Type	尺寸 Dimensions (mm)		
		A	B	C
16	TJC22002-2 × 8AW	23.5	15.4	21.3
20	TJC22002-2 × 10AW	27.9	19.8	25.7
24	TJC22002-2 × 12AW	32.3	24.2	30.1
28	TJC22002-2 × 14AW	36.7	28.6	34.5
32	TJC22002-2 × 16AW	41.1	33	38.9
36	TJC22002-2 × 18AW	45.5	37.4	43.3
40	TJC22002-2 × 20AW	49.9	41.8	47.7
材质 · 表面处理 Material and Finish				
PA66+GF UL94V-0; 黄铜 镀锡 Brass Tin · Plated				

间距 (space) :2.2mm

Assembly View (FYI)