

TJC22002 (WTW) 型条形连接器
TJC22002 (WTW) Bar Connector


间距 (space) :2.2mm



技术参数 (Specifications)


- 适用线规 (Applicable wires) : AWG#22
- 温度范围 (Temperature range) : -40℃~85℃
- 额定电压 (Voltage rating) : 100V AC/DC
- 额定电流 (Current rating) : 3A (AWG#22)
- 接触电阻 (Contact resistance) : ≤10mΩ
- 绝缘电阻 (Insulation resistance) : ≥100MΩ
- 耐电压 (Withstand voltage) : 1000V AC/minute

插簧 Socket Contact

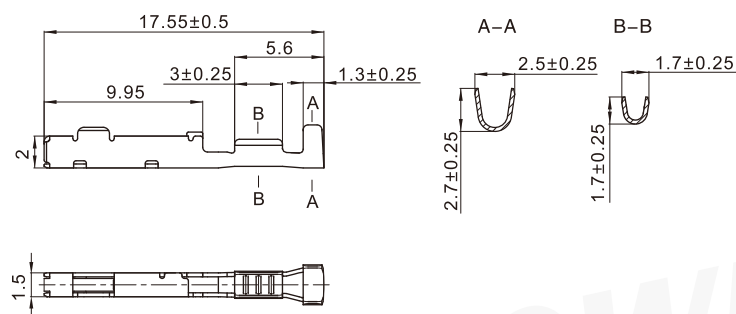


型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm²	AWG#	
CH-TJC22002	0.35	FLRY-A 0.35mm²(AWG#22)	1.25
材质・表面处理 Material and Finish			
Copper alloy Tin・Plated			

插针 Pin Contact

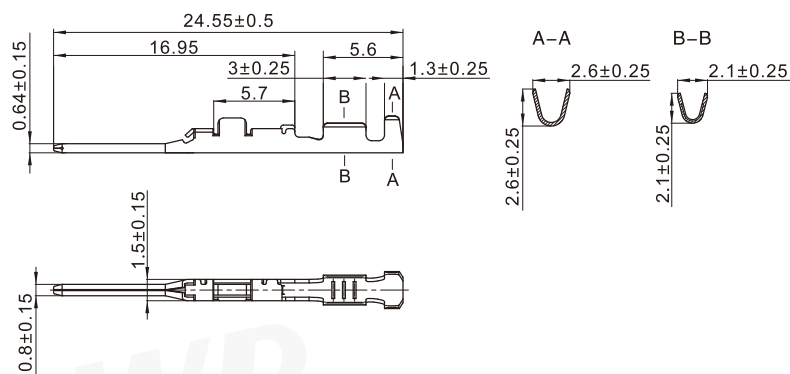


型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm²	AWG#	
CZ-TJC22002AR	0.35	FLRY-A 0.35mm²(AWG#22)	1.25
材质・表面处理 Material and Finish			
Copper alloy Tin・Plated			

孔座 Plug housing

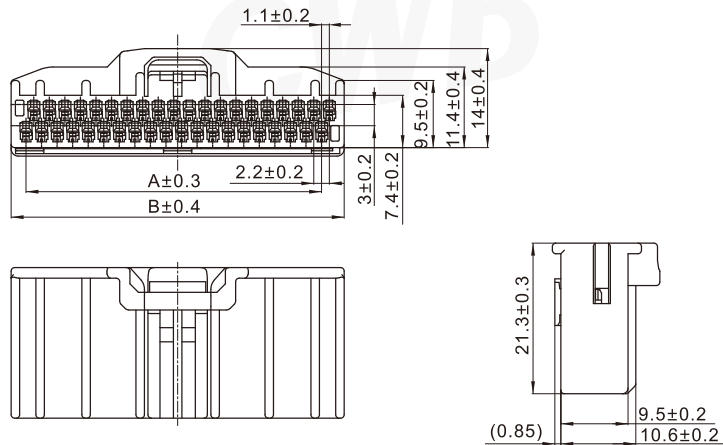

线数 Poles	型号Type	尺寸Dimensions (mm)	
		A	B
16	TJC22002-2x8Y ASSY	15.4	20.7
20	TJC22002-2x10Y ASSY	19.8	25.1
24	TJC22002-2x12Y ASSY	24.2	29.5
28	TJC22002-2x14Y ASSY	28.6	33.9
32	TJC22002-2x16Y ASSY	33	38.3
36	TJC22002-2x18Y ASSY	37.4	42.7
40	TJC22002-2x20Y ASSY	41.8	47.1
材质・表面处理 Material and Finish			
PA66 UL94 V-0			

针座 Receptacle housing

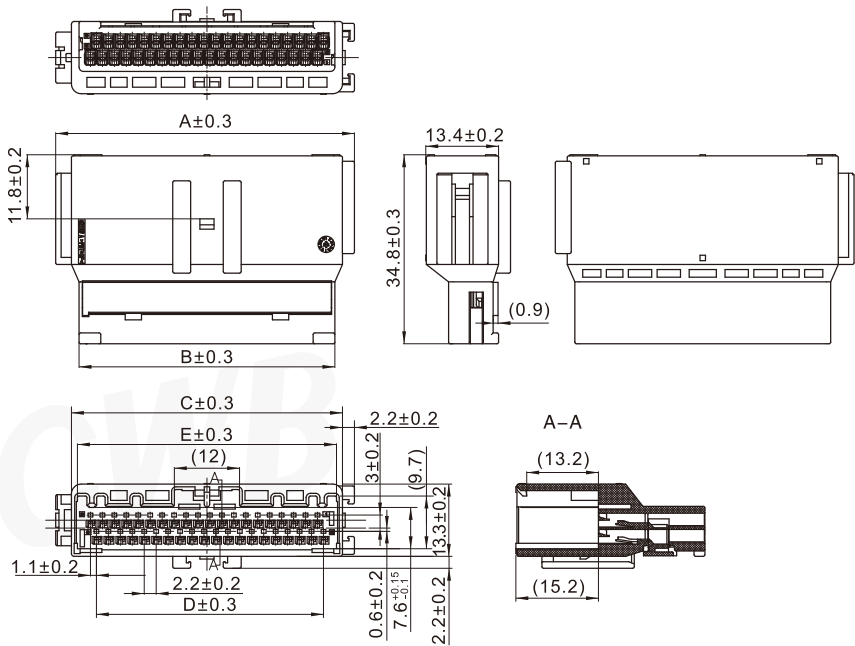

线数 Poles	型号Type	尺寸Dimensions (mm)				
		A	B	C	D	E
16	TJC22002-2x8AR ASSY	28.6	20.7	23.5	15.4	21.3
20	TJC22002-2x10AR ASSY	33	25.1	27.9	19.8	25.7
24	TJC22002-2x12AR ASSY	37.4	29.5	32.3	24.2	30.1
28	TJC22002-2x14AR ASSY	41.8	33.9	36.7	28.6	34.5
32	TJC22002-2x16AR ASSY	46.2	38.3	41.1	33	38.9
36	TJC22002-2x18AR ASSY	50.6	42.7	45.5	37.4	43.3
40	TJC22002-2x20AR ASSY	55	47.1	49.9	41.8	47.7
材质・表面处理 Material and Finish						
PBT+GF UL94V-0						

安装尺寸 Mounting Measurement

