


技术参数 (Specifications)


适应基板厚度 (Applicable PC board thickness) : 1.2~1.6mm
温度范围 (Temprature range) : -25℃~85℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 3A
耐压 (Withstand voltage) : 1000V AC/minute

阳连接器 (立式，直插) Header (V, DIP)

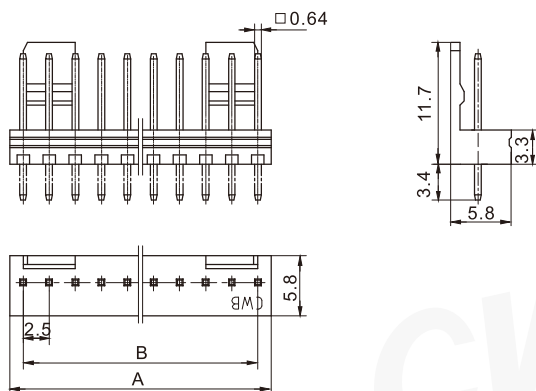

线数 Poles	型号 Type	尺寸Dimensions(mm)		线数 Poles	型号 Type	尺寸Dimensions(mm)		线数 Poles	型号 Type	尺寸Dimensions(mm)	
		A	B			A	B			A	B
2	TJC25013-2A	5.0	2.5	9	TJC25013-9A	22.5	20.0	16	TJC25013-16A	40.0	37.5
3	TJC25013-3A	7.5	5.0	10	TJC25013-10A	25.0	22.5	17	TJC25013-17A	42.5	40.0
4	TJC25013-4A	10.0	7.5	11	TJC25013-11A	27.5	25.0	18	TJC25013-18A	45.0	42.5
5	TJC25013-5A	12.5	10.0	12	TJC25013-12A	30.0	27.5	19	TJC25013-19A	47.5	45.0
6	TJC25013-6A	15.0	12.5	13	TJC25013-13A	32.5	30.0	20	TJC25013-20A	50.0	47.5
7	TJC25013-7A	17.5	15.0	14	TJC25013-14A	35.0	32.5				
8	TJC25013-8A	20.0	17.5	15	TJC25013-15A	37.5	35.0				
材质 · 表面处理 Material and Finish											
PA66 UL94V-0; 黄铜 镀锡 Brass Tin · Plated											

安装尺寸 Mounting Measurement

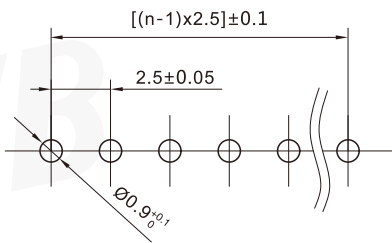

PCB Layout