


技术参数 (Specifications)

适用线规 (Applicable wires) : AWG#26~AWG#22
适应基板厚度 (Applicable PC board thickness) : 1.6 mm
温度范围 (Temperature range) : -25℃~85℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 3A
接触电阻 (Contact resistance) : ≤10mΩ
绝缘电阻 (Insulation resistance) : ≥1000MΩ
耐压 (Withstand voltage) : 1000V AC/minute
对配插簧 (Matched Terminal) : TJC3 Terminal


认证 (Standards) :  E200881

孔座 Housing

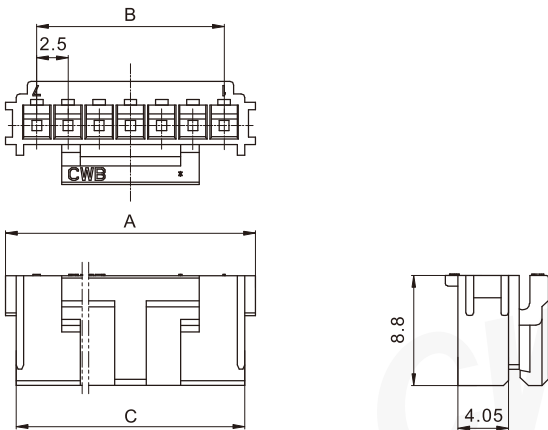

线数 Poles	型号 Type	尺寸Dimensions (mm)		
		A	B	C
2	TJC25057-2Y	7.5	2.5	5.8
3	TJC25057-3Y	10	5	8.3
4	TJC25057-4Y	12.5	7.5	10.8
5	TJC25057-5Y	15	10	13.3
6	TJC25057-6Y	17.5	12.5	15.8
7	TJC25057-7Y	20	15	18.3
8	TJC25057-8Y	22.5	17.5	20.8
9	TJC25057-9Y	25	20	23.3
10	TJC25057-10Y	27.5	22.5	25.8
12	TJC25057-12Y	32.5	27.5	30.8
材质 Material		PA66 UL94V-0		

阳连接器 (立式，直插，含定位柱，含小弯) Header (V, DIP, W/Boss, W/Kink)

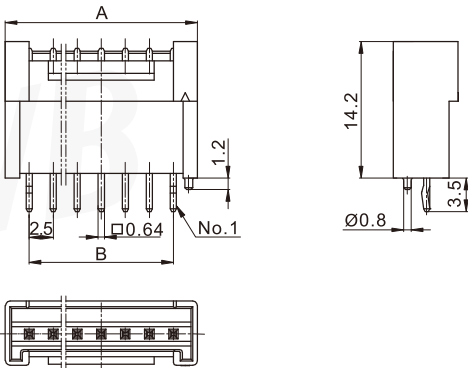

线数 Poles	型号 Type	尺寸Dimensions (mm)	
		A	B
2	TJC25057-2ADGK	7.5	2.5
3	TJC25057-3ADGK	10	5
4	TJC25057-4ADGK	12.5	7.5
5	TJC25057-5ADGK	15	10
6	TJC25057-6ADGK	17.5	12.5
7	TJC25057-7ADGK	20	15
8	TJC25057-8ADGK	22.5	17.5
9	TJC25057-9ADGK	25	20
10	TJC25057-10ADGK	27.5	22.5
12	TJC25057-12ADGK	32.5	27.5
材质・表面处理 Material and Finish			
PA66 UL94V-0; 黄铜 镀锡 Brass Tin・Plated			

安装尺寸 Mounting Measurement

