


TJC25069 型条形连接器
TJC25069 Bar Connector


间距 (space) :2.5mm

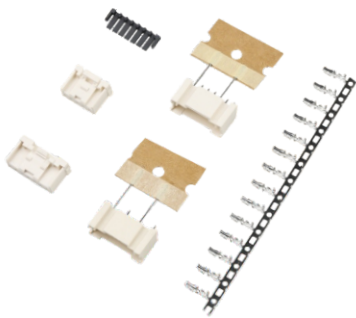

技术参数 (Specifications)


- 适用线规 (Applicable wires) : AWG24#~22#
- 温度范围 (Temperature range) : -30℃~+105℃
- 额定电压 (Voltage rating) : 125V AC/DC
- 额定电流 (Current rating) : 3A
- 接触电阻 (Contact resistance) : ≤0. 01Ω
- 绝缘电阻 (Insulation resistance) : ≥1000MΩ
- 耐电压 (Withstand voltage) : 1250V AC/minute

端子 Terminal

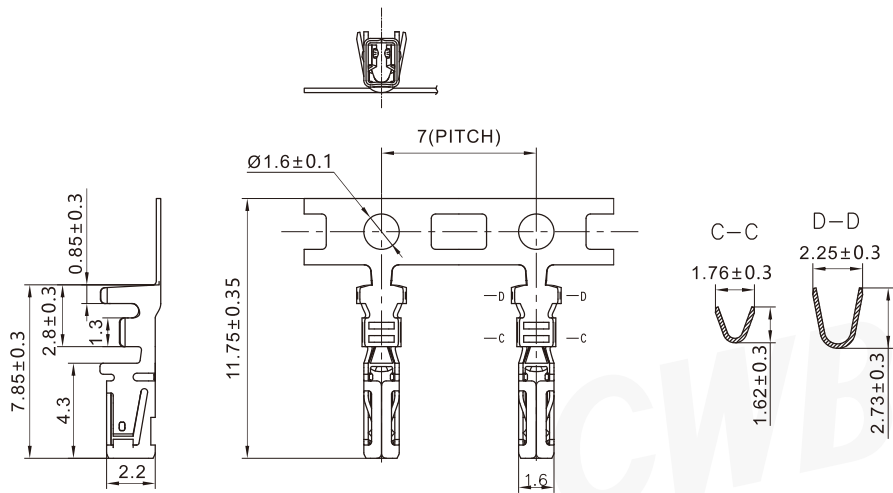

型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm²	AWG#	
CH-TJC25069	0.22 ~ 0.34	24 ~ 22	1.4 ~ 1.6
材质・表面处理 Material and Finish			
磷青铜 镀锡 Phos・bronze Tin・Plated			

孔座 Housing

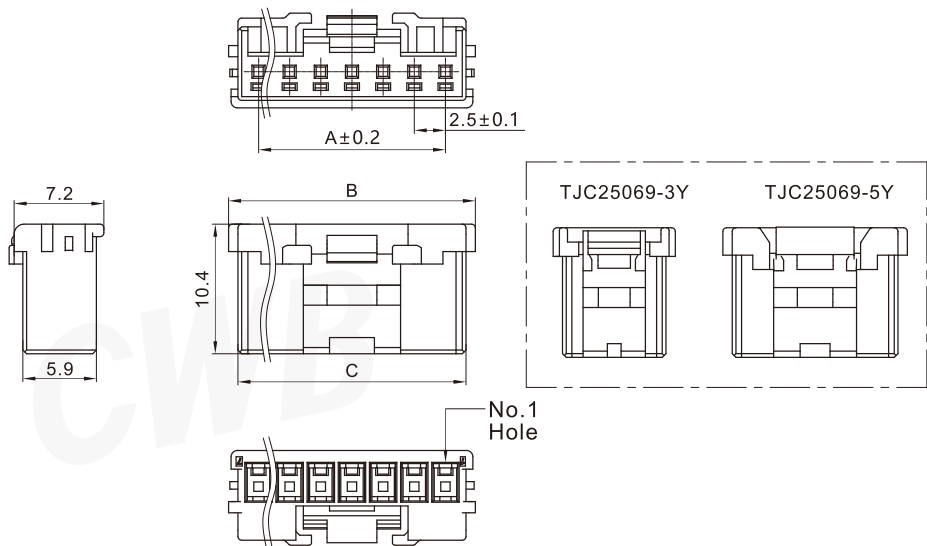


TJC25069 型条形连接器
TJC25069 Bar Connector

间距 (space) :2.5mm


线数 Poles	型号Type	尺寸Dimensions (mm)		
		A	B	C
3	TJC25069-3Y	5	9.4	8.3
5	TJC25069-5Y	10	14.4	13.3
7	TJC25069-7Y	15	19.8	18.3
材质 Material				
PA66+GF UL94 V-0 GWT750℃				

锁紧片 Retainer

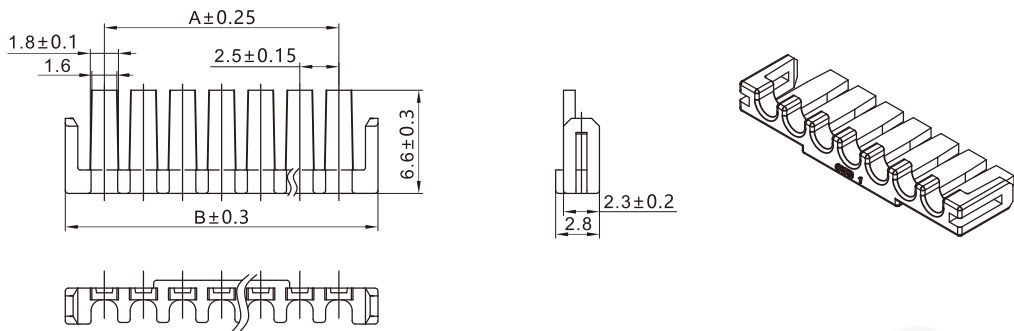


线数 Poles	型号Type	尺寸Dimensions (mm)	
		A	B
3	TJC25069-3YS	5	10
5	TJC25069-5YS	10	15
7	TJC25069-7YS	15	20
材质 Material			
PA66+GF UL94 V-0 GWT750℃			

锁紧片 Retainer

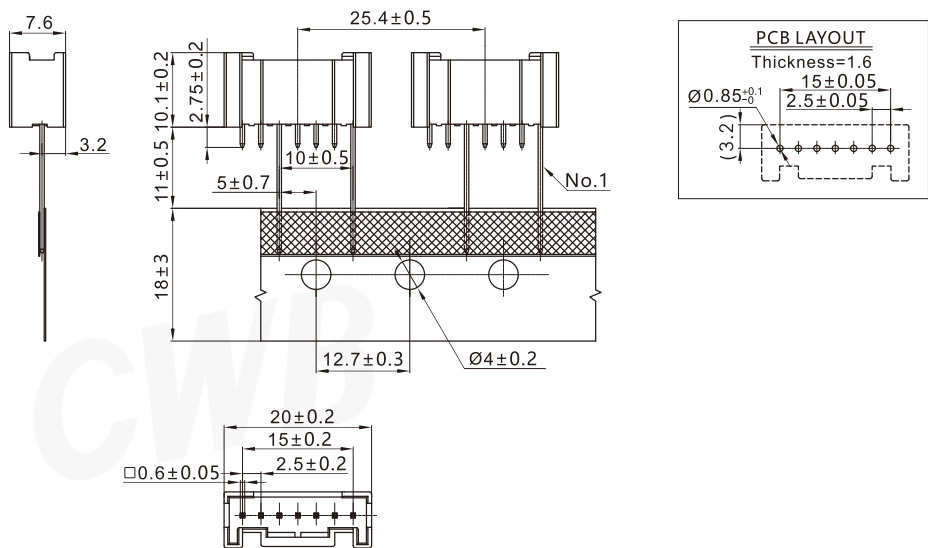

线数 Poles	型号Type	尺寸Dimensions (mm)	
		A	B
7	TJC25069-7AT	20	15
材质・表面处理 Material and Finish			
PA66+GF UL94V-0 GWT750℃; 黄铜 镀锡 Brass Tin・Plated			

安装尺寸 Mounting Measurement

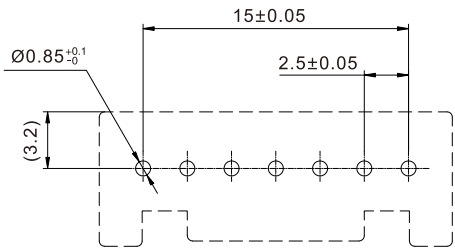

PCB Layout