


TJC25415 型条形连接器
TJC25415 Bar Connector


间距 (space) :2.54mm

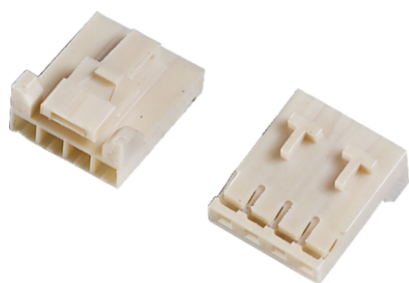

技术参数 (Specifications)


适用线规 (Applicable wires) :AWG#28~AWG#24
适应基板厚度 (Applicable PC board thickness) : 1.2~1.6 mm
温度范围 (Temperature range) : -25℃~85℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 3A
接触电阻 (Contact resistance) : ≤10mΩ
绝缘电阻 (Insulation resistance) : ≥1000MΩ
耐压 (Withstand voltage) : 1000V AC/minute
认证 (Standards) :  E200881

插簧 Contact




型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm ²	AWG#	
CH-TJC25415	0.08~0.22	28~24	1.2~1.5
材质・表面处理 Material and Finish			
磷青铜 镀锡 Phos・bronze Tin・Plated			

孔座 Housing

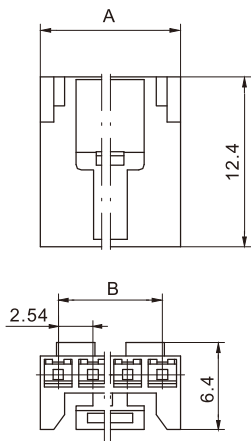


线数Poles	型号Type	尺寸Dimensions(mm)	
		A	B
2	TJC25415-2Y	5.19	2.54
4	TJC25415-4Y	10.27	7.62
材质 Material		PA66 UL94V-0	

阳连接器 (立式，直插) Header (V, DIP)

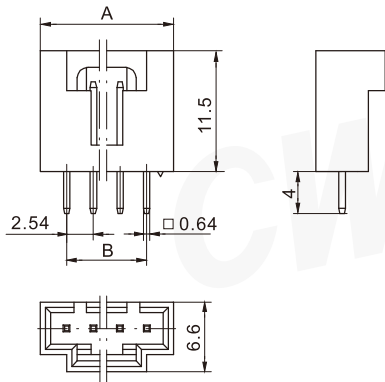


线数Poles	型号Type	尺寸Dimensions(mm)	
		A	B
2	TJC25415-2A	7.62	2.54
4	TJC25415-4A	12.7	7.62
材质・表面处理 Material and Finish			
PA66 UL94V-0; 黄铜 镀锡 Brass Tin・Plated			

安装尺寸 Mounting Measurement



PCB Layout

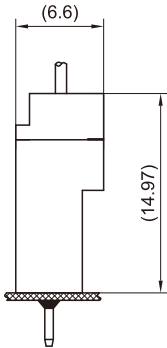

Assembly View (DIM FYI)