

TJC25456 型条形连接器
TJC25456 Bar Connector


间距 (space) :2.54mm



技术参数 (SPECIFICATIONS)


- 适用线缆 (Useable wire range) : 针对FPC/FFC类产品
- 适应基板厚度 (Applicable PC board thickness) : 1.2mm~1.6mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 250V AC/DC
- 额定电流 (Current rating) : 0.5A
- 绝缘电阻 (Insulation resistance) : ≥1000MΩ
- 耐压 (Withstand voltage) : 1000V AC/minute

阳连接器 HEADER

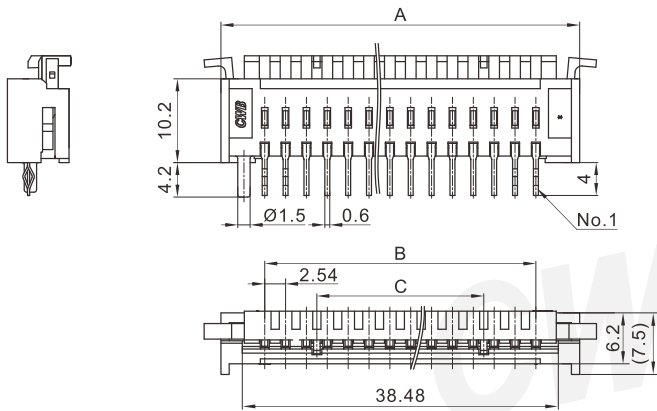

线数 Poles	型号 Type	尺寸 Dimensions (mm)		
		A	B	C
14	TJC25456-14FD1K	43.68	33.02	20.32
22	TJC25456-22FD1K	64	53.34	45.72
材质 · 表面处理 Material and Finish PA66 UL94V-0 磷青铜 镀锡 Phos · bronze Tin Plated				

阳连接器 HEADER

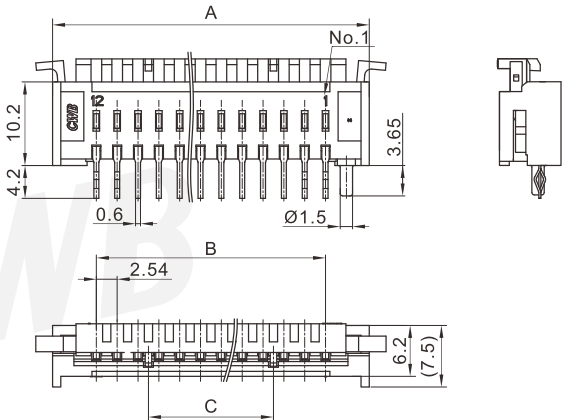


TJC25456 型条形连接器
TJC25456 Bar Connector

间距 (space) :2.54mm


线数 Poles	型号 Type	尺寸 Dimensions (mm)			备注 Remark
		A	B	C	
12	TJC25456-12FDK	38.6	27.94	15.24	高的FPC插入力 High FPC insertion force
12	TJC25456-12FDK-1	38.6	27.94	15.24	低的FPC插入力 Low FPC insertion force
13	TJC25456-13FDK-1	41.14	30.48	22.86	
材质・表面处理 Material and Finish PA66 UL94V-0 磷青铜 镀锡 Phos・bronze Tin Plated					

阳连接器 HEADER

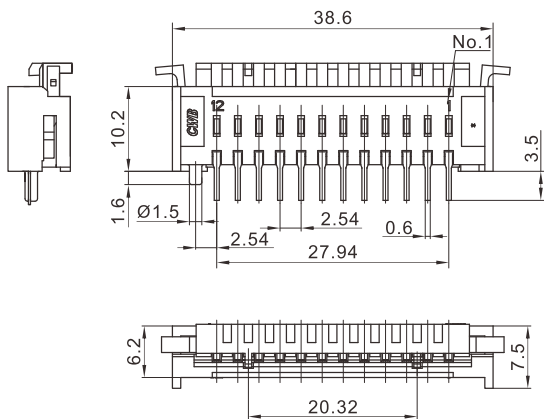


线数 Poles	型号 Type
12	TJC25456-12FD1-1
材质・表面处理 Material and Finish PA66 UL94V-0; 磷青铜 镀锡 Phos・bronze Tin Plated	

阳连接器 HEADER

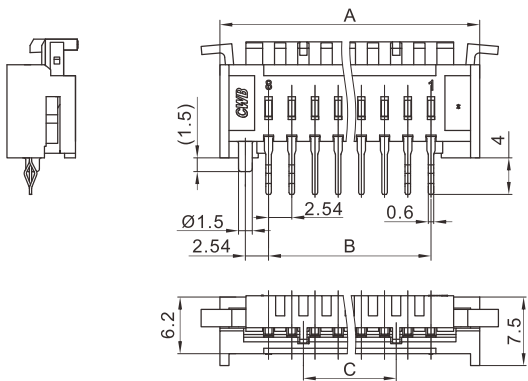

线数 Poles	型号 Type	尺寸 Dimensions (mm)		
		A	B	C
5	TJC25456-5FD1K-2	20.82	10.16	2.54
8	TJC25456-8FD1K-2	28.44	17.78	10.16
13	TJC25456-13FD1K-2	41.14	30.48	22.86
材质・表面处理 Material and Finish PA66 UL94V-0 磷青铜 镀锡 Phos・bronze Tin Plated				

安装尺寸 MOUNTNG MEASUREMENT

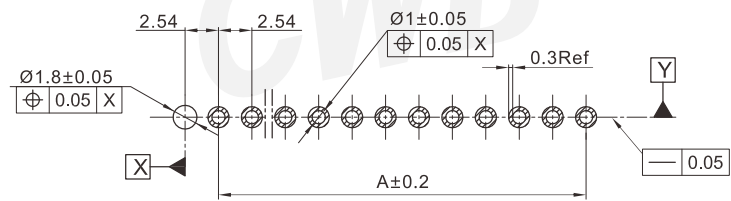

PCB Layout