


TJC25460 型条形连接器
TJC25460 Bar Connector

间距 (space) :2.5mm

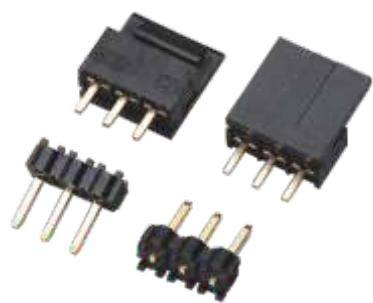


技术参数 (SPECIFICATIONS)

- 适应基板厚度 (Applicable PC board thickness) : 1.6 mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 250V AC/DC
- 额定电流 (Current rating) : 3A
- 接触电阻 (Contact resistance) : ≤0.02Ω
- 绝缘电阻 (Insulation resistance) : ≥1000MΩ
- 耐压 (Withstand voltage) : 1000V AC/minute


认证 (STANDARDS) :  E200881

阴连接器 HOUSING

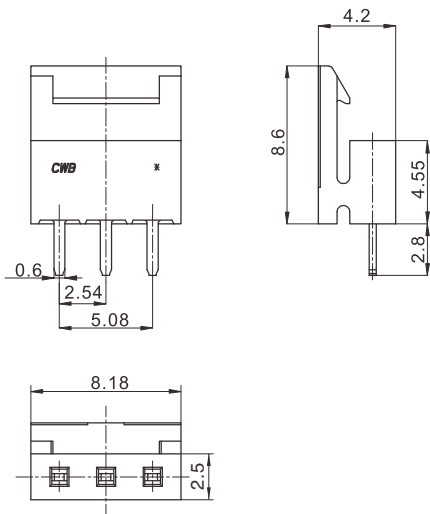

线数 Poles	型号 Type
3	TJC25460-3Y
材质 · 表面处理 Material and Finish PA66 UL94V-0 磷青铜 镀金 Phos · bronze Au · Plated	

安装尺寸 MOUNTING MEASUREMENT

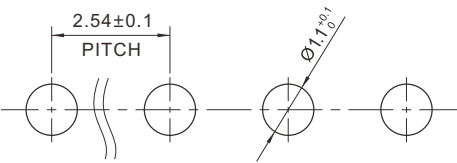


PCB Layout

TJC25460 型条形连接器
TJC25460 Bar Connector


间距 (space) :2.5mm

阳连接器 HEADER (180°)

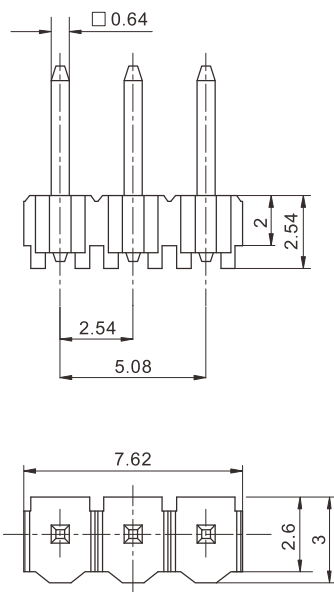

线数 Poles	型号 Type
3	TJC25460-3A
材质 · 表面处理 Material and Finish PA66 UL94V-0 黄铜 镀金 Brass Au · Plated	

安装尺寸 MOUNTING MEASUREMENT

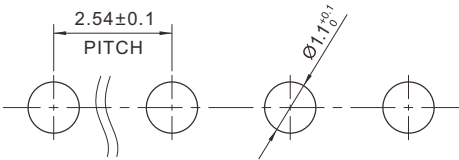

PCB Layout