


TJC25475 型条形连接器
TJC25475 Bar Connector

间距 (space) :2.54mm

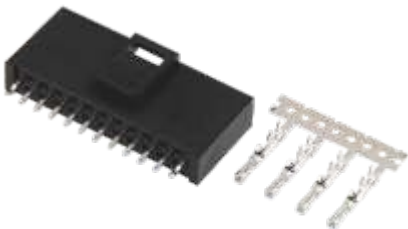

技术参数 (SPECIFICATIONS)

温度范围 (Temperature range) : -40℃~105℃

额定电压 (Voltage rating) : 250V AC/DC

额定电流 (Current rating) : 3A


接触电阻 (Contact resistance) : ≤0.01 Ω

绝缘电阻 (Insulation resistance) : ≥1000MΩ

耐压 (Withstand voltage) : 500V AC/minute


认证 (STANDARDS) :  E200881

端子 TERMINAL




型号Type	适用导扁平线厚度
CH-TJC25475	0.3mm
材质・表面处理 Material and Finish	
磷青铜 镀锡 Phos・bronze Tin・Plated	

阴连接器 HOUSING

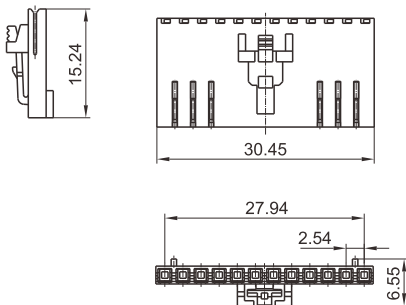


线数 Poles	型号 Type
12	TJC25475-12Y
材质・表面处理 Material and Finish	
PA66 UL94V-0	

阳连接器 HEADER

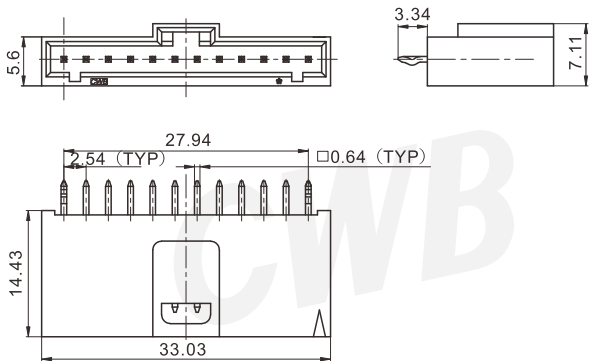


线数 Poles	型号 Type
12	TJC25475-12AGK
材质・表面处理 Material and Finish	
PA66 UL94V-0 ; 黄铜 镀锡 Brass Tin・Plated	

安装尺寸 MOUNTNG MEASUREMENT



PCB Layout

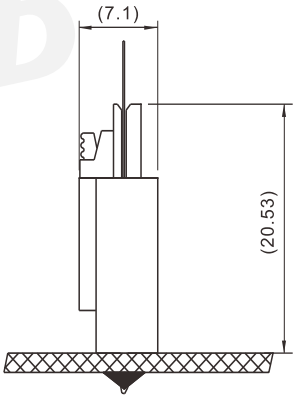

Assembly View (DIM FYI)