

TJC26 型条形连接器
TJC26 Bar Connector


间距 (space) :2.5mm



技术参数 (Specifications)


- 温度范围(Temprature range): -25℃~85℃
- 额定电压 (Voltage rating) : 250V AC/DC
- 额定电流 (Current rating) : 3A
- 接触电阻 (Contact resistance) : ≤10mΩ
- 绝缘电阻 (Insulation resistance) : ≥1000MΩ
- 耐压 (Withstand voltage) : 1000V AC/minute

插簧 Contact

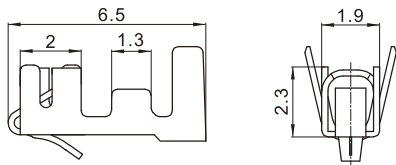

型号 Type	适用导线范围Wire Range		导线外径 Wire ins.Dis	备注 Remark
	mm²	AWG#		
CH-TJC3	0.22 ~ 0.33	24 ~ 22	1.4 ~ 1.6	料带宽度3.0mm
CH-TJC3B	0.22 ~ 0.33	24 ~ 22	1.4 ~ 1.6	料带宽度2.5mm
CH-TJC3-1	0.13	26	1.3	料带宽度3.0mm
CH-TJC3-2	0.08	28	1.2	料带宽度3.0mm
材质 · 表面处理 Material and Finish				
磷青铜 镀锡 Phos · bronze Tin · Plated				

孔座 Housing

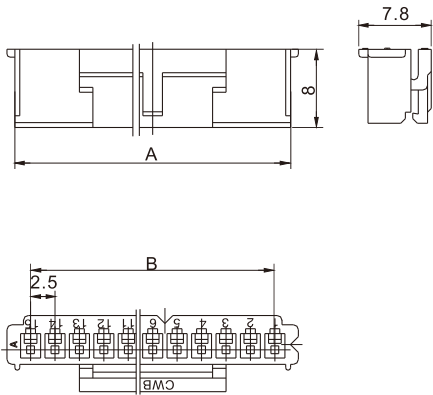

线数Poles	型号Type	尺寸Dimensions(mm)	
		A	B
4	TJC26-4Y	10.7	7.5
5	TJC26-5Y	13.2	10.0
6	TJC26-6Y	15.7	12.5
7	TJC26-7Y	18.2	15.0
8	TJC26-8Y	20.7	17.5
9	TJC26-9Y	23.2	20.0
10	TJC26-10Y	25.7	22.5
11	TJC26-11Y	28.2	25.0
12	TJC26-12Y	30.7	27.5
13	TJC26-13Y	33.2	30.0
14	TJC26-14Y	35.7	32.5
15	TJC26-15Y	38.2	35.0
材质 Material			
PA66 UL94V-2			