

TJC26 型条形连接器
TJC26 Bar Connector


间距 (space) :2.5mm



技术参数 (SPECIFICATIONS)


温度范围(Temprature range): -25℃~85℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 3A
接触电阻 (Contact resistance) : ≤0.01Ω
绝缘电阻 (Insulation resistance) : ≥1000MΩ
耐压 (Withstand voltage) : 1000V AC/minute

端子 TERMINAL

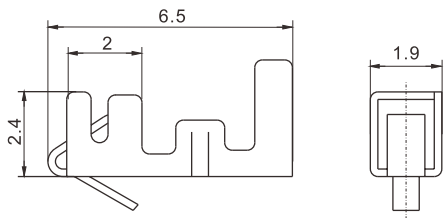

型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm²	AWG#	
CH-TJC3	0.08~0.33	28~22	1.2~1.9
材质・表面处理 Material and Finish			
磷青铜 镀锡 Phos・bronze Tin・Plated			

阴连接器 HOUSING

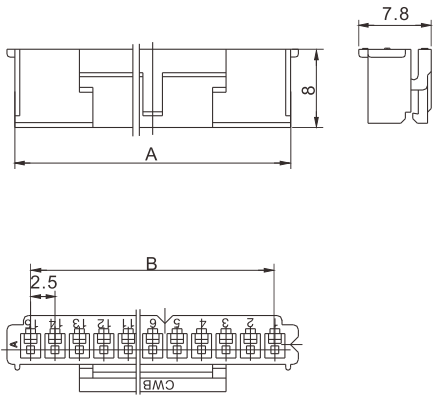

线数Poles	型号Type	尺寸Dimensions(mm)	
		A	B
4	TJC26-4Y	10.7	7.5
5	TJC26-5Y	13.2	10.0
6	TJC26-6Y	15.7	12.5
7	TJC26-7Y	18.2	15.0
8	TJC26-8Y	20.7	17.5
9	TJC26-9Y	23.2	20.0
10	TJC26-10Y	25.7	22.5
11	TJC26-11Y	28.2	25.0
12	TJC26-12Y	30.7	27.5
13	TJC26-13Y	33.2	30.0
14	TJC26-14Y	35.7	32.5
15	TJC26-15Y	38.2	35.0
材质・表面处理 Material and Finish			
PA66 UL94V-2			