


TJC3008&CZ367 型条形连接器
TJC3008&CZ367 Bar Connector


间距 (space) :3.0mm

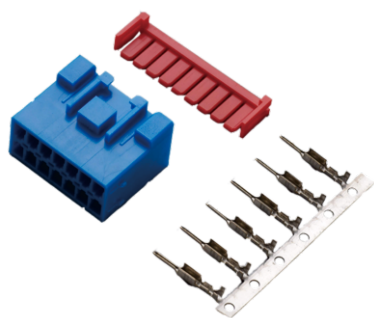

技术参数 (Specifications)


适用线规 (Applicable wires) : AWG#24~AWG#22
温度范围 (Temprature range) : -25℃~85℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 3A
接触电阻 (Contact resistance) : ≤20mΩ
绝缘电阻 (Insulation resistance) : ≥1000MΩ
耐压 (Withstand voltage) : 2200V AC/minute

插针 Pin contact

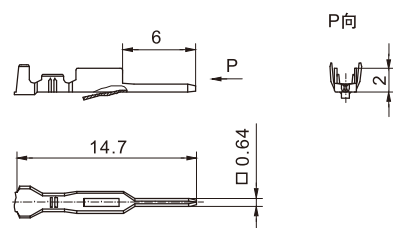


型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm ²	AWG#	
CZ367	0.2~0.3	24~22	1.4~1.6
材质·表面处理 Material and Finish			
黄铜 镀锡 Brass Tin·Plated			

针座 (含锁紧片保持结构) Receptacle housing (W/Retainer)

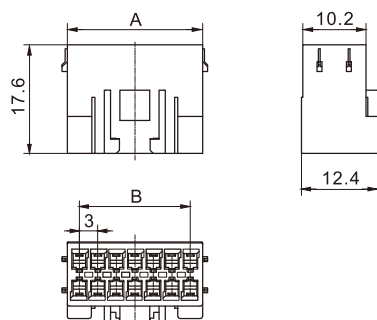

线数 Poles	型号 Type	尺寸 Dimensions(mm)	
		A	B
14	TJC3008-2x7Y	22	18
18	TJC3008-2x9Y	28	24
材质 Material		PC/PET UL94V-0	

锁紧片 Retainer



线数 Poles	型号 Type	尺寸 Dimensions(mm)	
		A	B
14	TJC3008-2x7YS	24	18
18	TJC3008-2x9YS	30	24
材质 Material		PA66 UL94V-0	