


TJC33001 型条形连接器
TJC33001 Bar Connector


间距 (space) :3.3mm

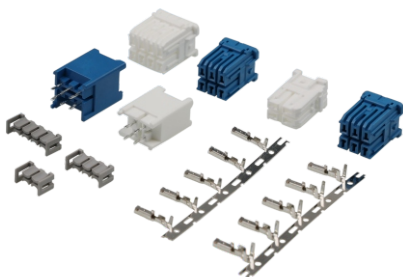

技术参数 (Specifications)


- 适用线规 (Applicable wires) : AWG#26~AWG#18
- 适应基板厚度 (Applicable PC board thickness) : 1.6 mm
- 温度范围 (Temperature range) : -25℃~105℃
- 额定电压 (Voltage rating) : 250V AC/DC
- 额定电流 (Current rating) : 5A
- 接触电阻 (Contact resistance) : $\leq 10\text{m}\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000\text{M}\Omega$
- 耐电压 (Withstand voltage) : 1500V AC/minute

插簧 Contact

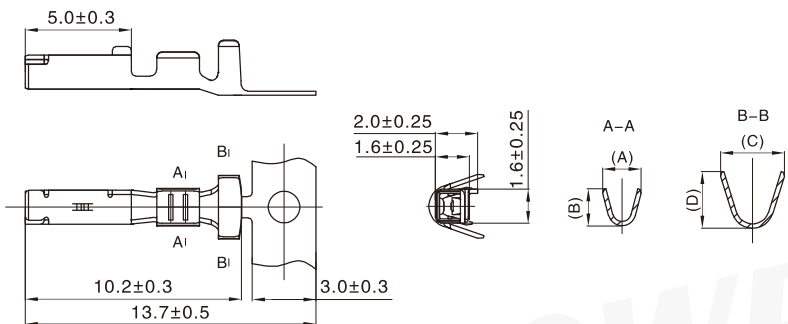


型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis	尺寸 Dimensions (mm)			
	mm ²	AWG#		A	B	C	D
CH-TJC33001	0.13 ~ 0.33	26 ~ 22	1.28 ~ 1.7	1.8	1.7	3.0	2.6
CH-TJC33001-1	0.33 ~ 0.83	22 ~ 18	1.6 ~ 2.5	2.2	2.2	4.1	3.9
材质 · 表面处理 Material and Finish							
磷青铜 镀锡 Phos · bronze Tin · Plated							

孔座 (双排) Housing (Double rows)

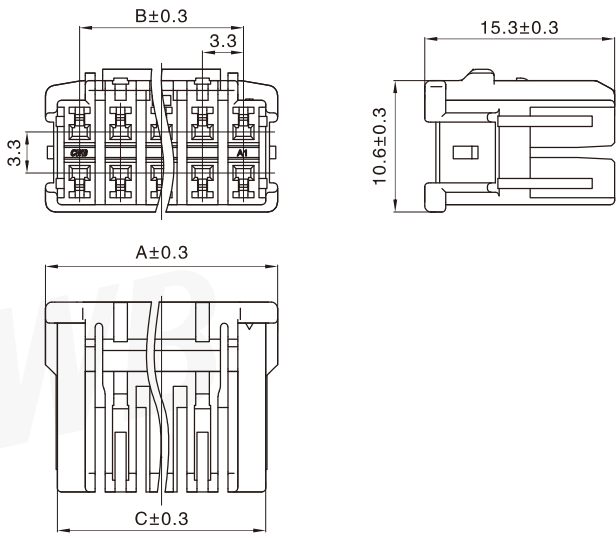


线数 Poles	型号 Type	尺寸 Dimensions (mm)		
		A	B	C
4	TJC33001-2x2Y	8.8	3.3	6.9
6	TJC33001-2x3Y	12.1	6.6	10.2
8	TJC33001-2x4Y	15.4	9.9	13.5
10	TJC33001-2x5Y	18.7	13.2	16.8
材质 Material				
PBT UL94V-0				

锁紧片 Retainer

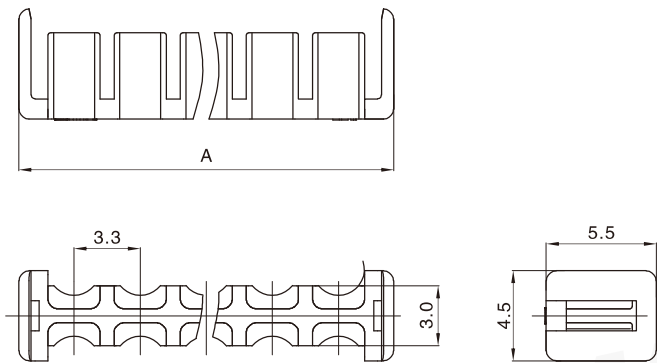

线数 Poles	型号 Type	尺寸 Dimensions (mm)
		A
4	TJC33001-2x2YS	8.8
6	TJC33001-2x3YS	12.1
8	TJC33001-2x4YS	15.4
10	TJC33001-2x5YS	18.7
材质 Material		
PA66 UL94V-0		

阳连接器 (立式, 含小弯, 带定位柱, 双排) Header (V, W/Kink, W/Boss, Double rows)

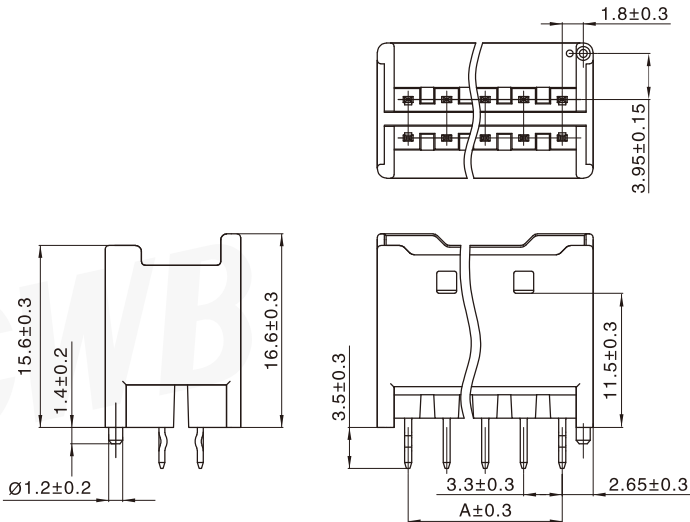

线数 Poles	型号 Type	尺寸 Dimensions (mm)
		A
2	TJC33001-2x2ADK	3.3
3	TJC33001-2x3ADK	6.6
4	TJC33001-2x4ADK	9.9
5	TJC33001-2x5ADK	13.2
材质・表面处理 Material and Finish		
PBT+GF UL94V-0; 黄铜 镀锡 Brass Tin・Plated		

安装尺寸 Mounting Measurement

TJC33001-2 × nADK

