


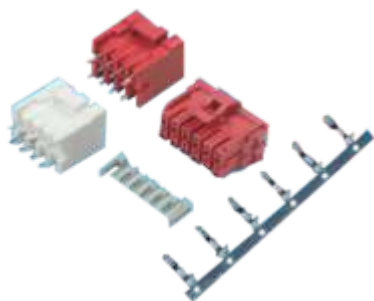

技术参数 (SPECIFICATIONS)

适应基板厚度 (Applicable PC board thickness) : 1.6 mm

温度范围 (Temperature range) : -40℃~105℃

额定电压 (Voltage rating) : 250V AC/DC

额定电流 (Current rating) : 1A~5A


接触电阻 (Contact resistance) : ≤10MΩ

绝缘电阻 (Insulation resistance) : ≥1000MΩ


耐压 (Withstand voltage) : 1500V AC/minute

认证 (STANDARDS) :  E200881

端子 TERMINAL

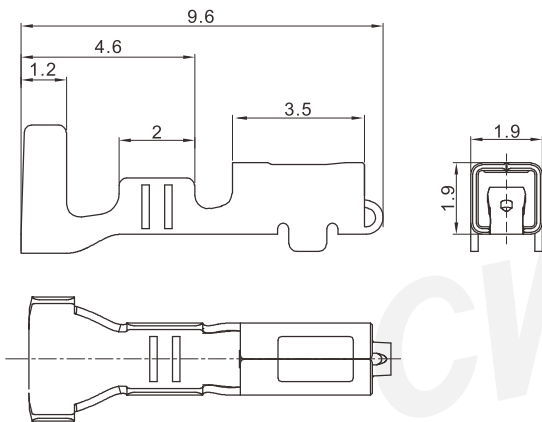

型号 Type	适用导线范围 Wire Range		绝缘皮外径mm
	mm ²	线型 Wire Type	
CH-TJC35006-A	0.2~0.3	AWG#24/AVR-90	1.45~2.2
CH-TJC35006-A5	0.5	RV-90	1.45~2.2
材质・表面处理 Material and Finish			
磷青铜 镀锡 Phos・bronze Tin・Plated			

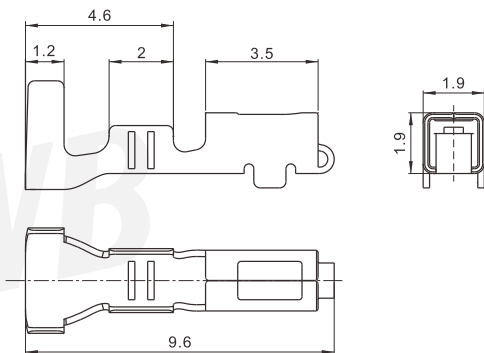


TJC35006 型条形连接器
TJC35006 Bar Connector

间距 (space) :3.5mm



型号 Type	适用导线范围 Wire Range		绝缘皮外径mm
	mm ²	线型 Wire Type	
CH-TJC35006-B	0.2~0.3	AWG#24/AVR-90	1.45~2.2
CH-TJC35006-B5	0.5	RV-90	1.45~2.2
材质・表面处理 Material and Finish			
磷青铜 镀锡 Phos・bronze Tin・Plated			

阴连接器 HOUSING

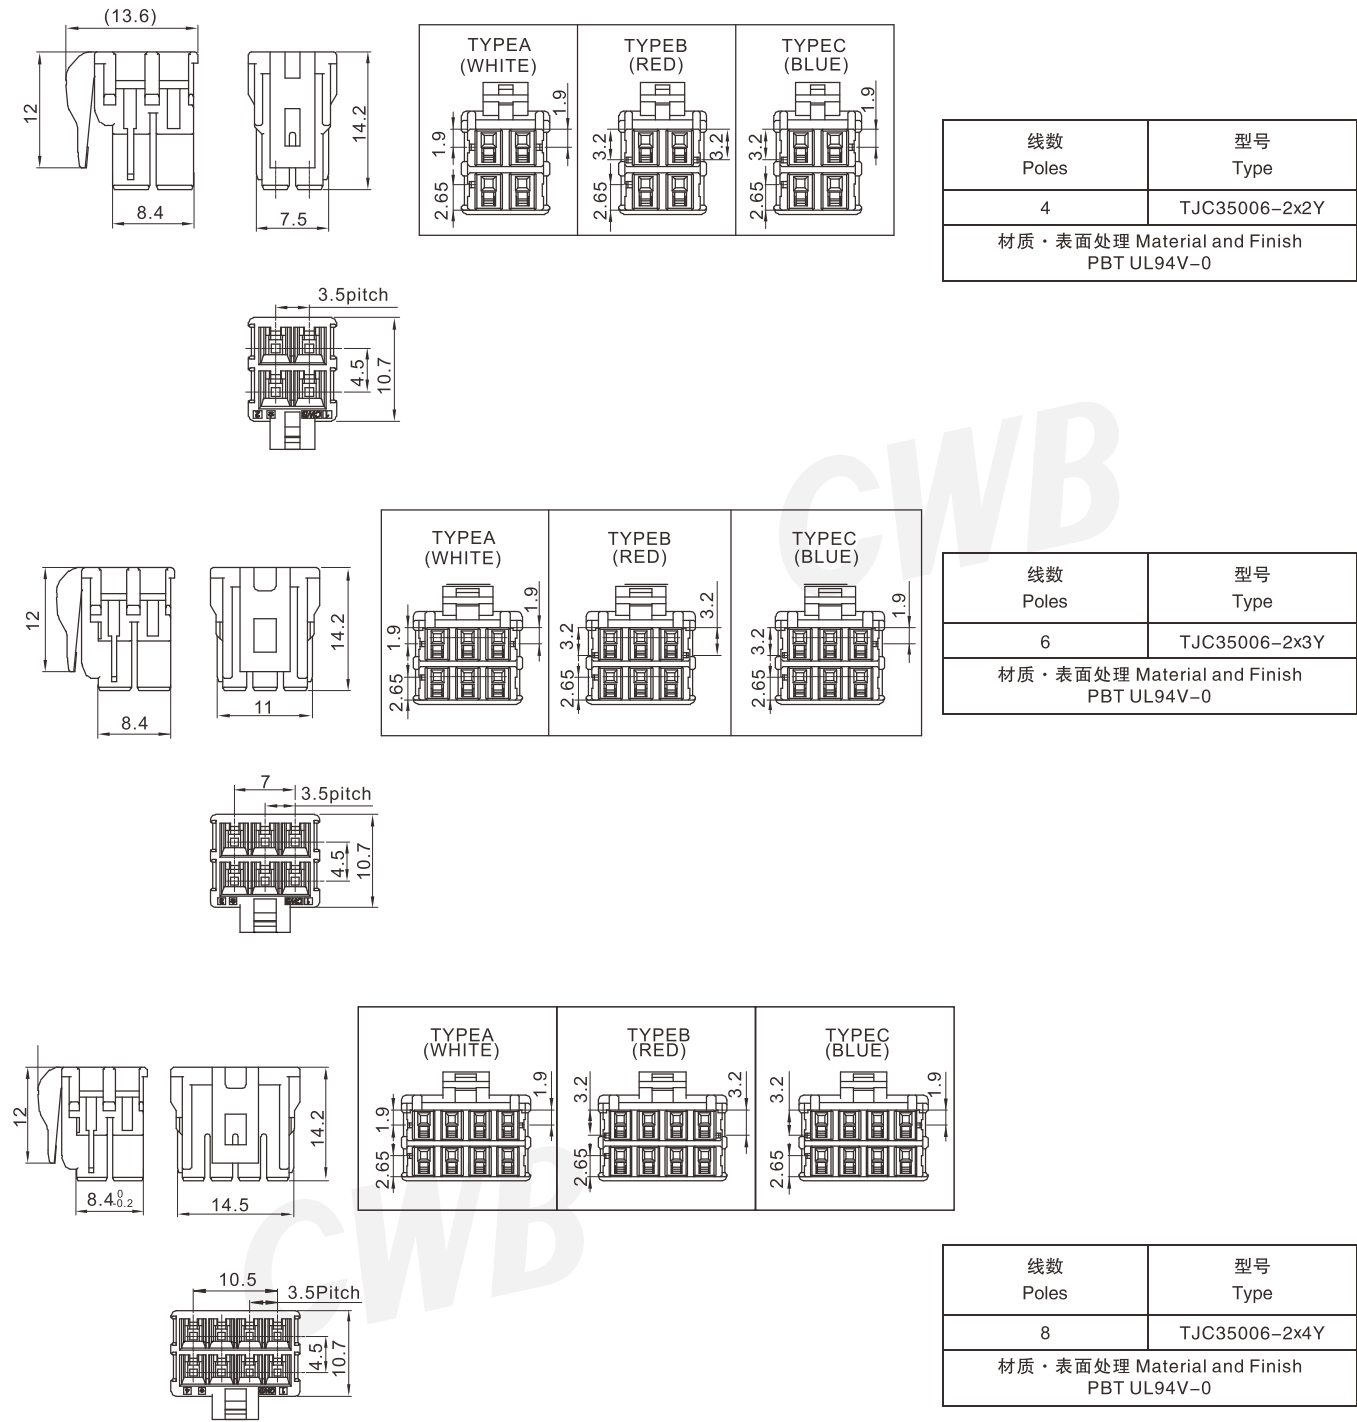

TJC35006 型条形连接器
TJC35006 Bar Connector


间距 (space) :3.5mm

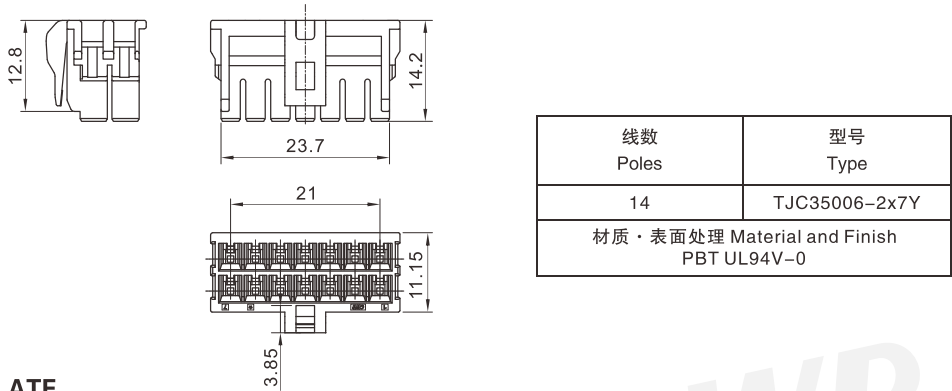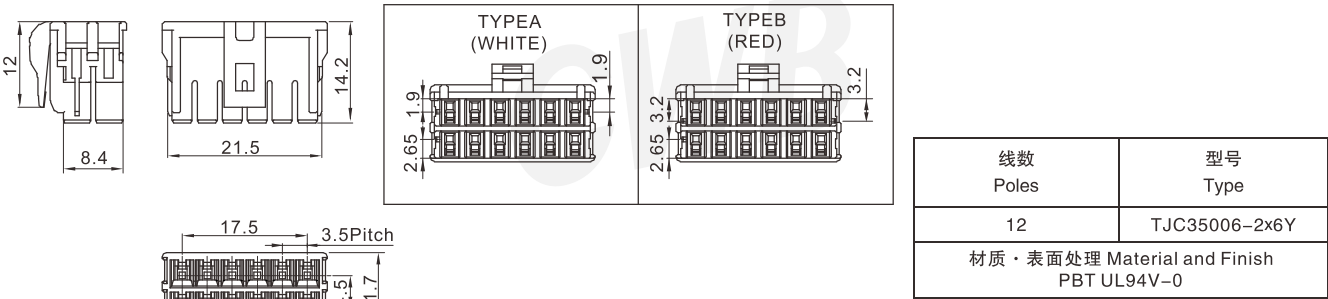

锁紧片 LOCK PLATE







阳连接器 HEADER

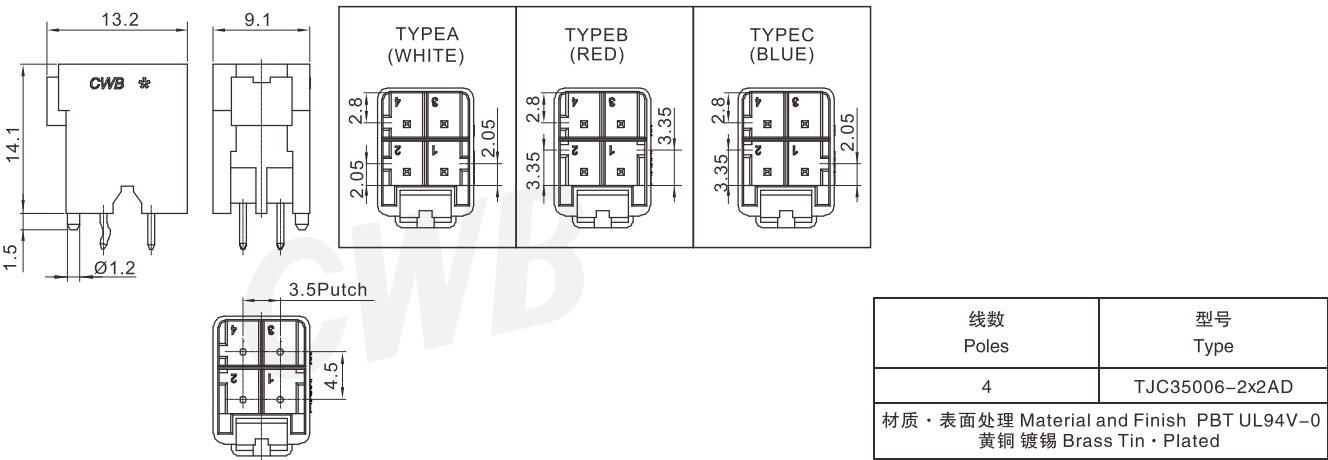

TJC35006 型条形连接器
TJC35006 Bar Connector


间距 (space) :3.5mm

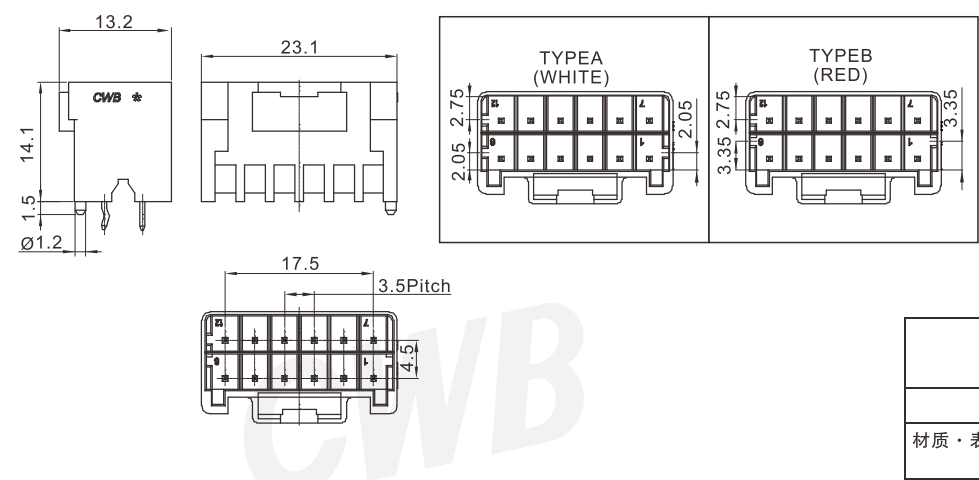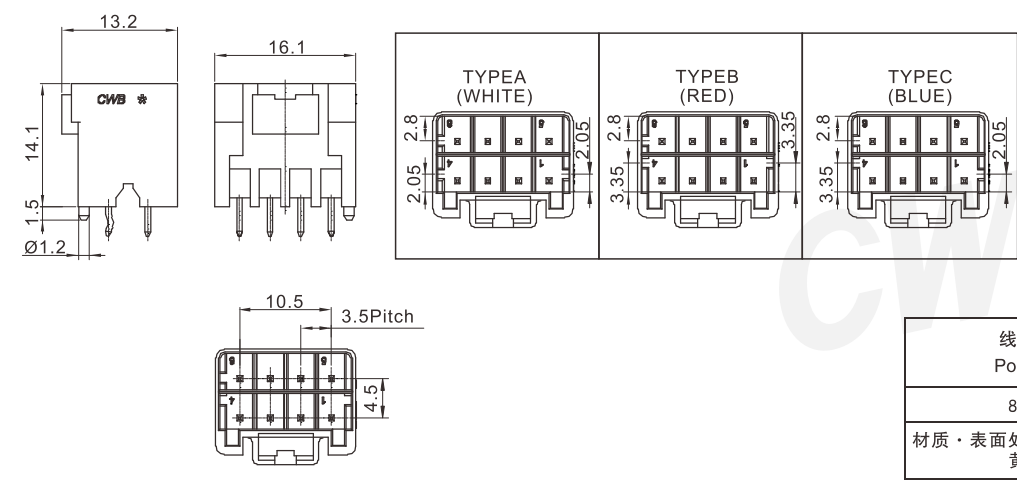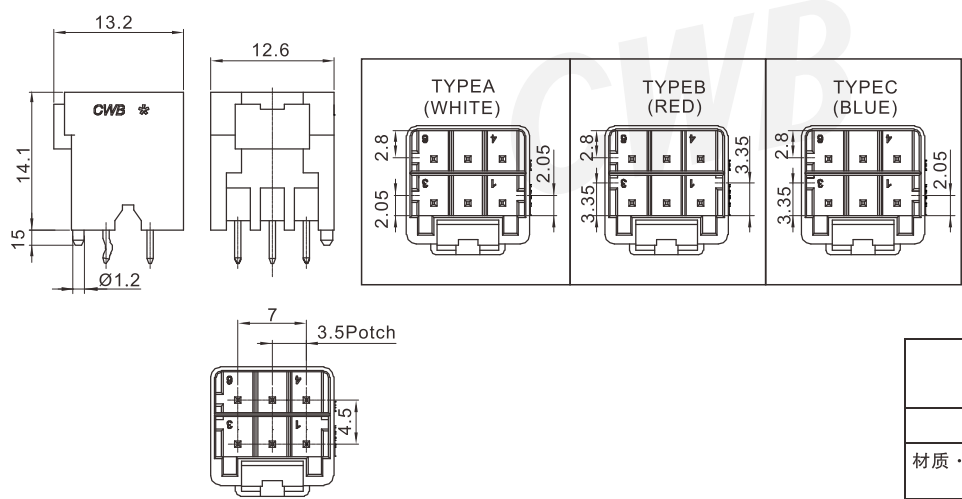

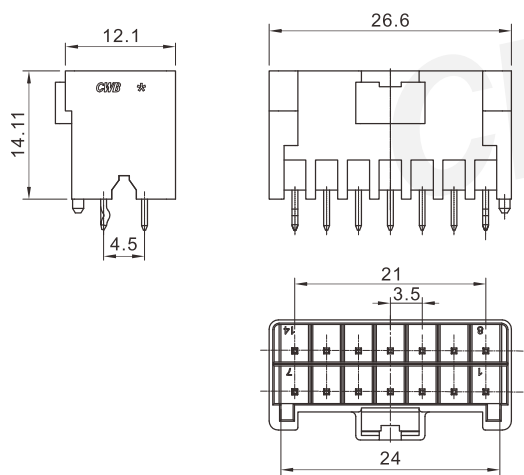


线数 Poles	型号 Type
14	TJC35006-2x7AD
材质・表面处理 Material and Finish PBT UL94V-0 黄铜 镀锡 Brass Tin・Plated	

安装尺寸 MOUNTING MEASUREMENT

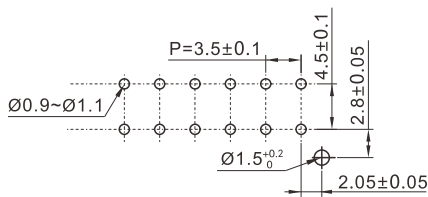

PCB Layout



Assembly View
(FYI)