




技术参数 (SPECIFICATIONS)


适用线规 (Applicable wires) : AWG#22~AWG#18
适应基板厚度 (Applicable PC board thickness) : 1.2~1.6mm
温度范围 (Temprature range) : -25℃~85℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 5A
接触电阻 (Contact resistance) : ≤0.01Ω
绝缘电阻 (Insulation resistance) : ≥1000MΩ
耐压 (Withstand voltage) : 1500V AC/minute

端子 TERMINAL

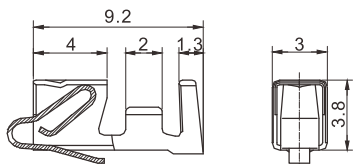


型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm²	AWG#	
CH-TJC3966	0.33~0.83	22~18	1.7~3.0
材质・表面处理 Material and Finish			
磷青铜 镀锡 Phos・bronze Tin・Plated			

阴连接器 HOUSING

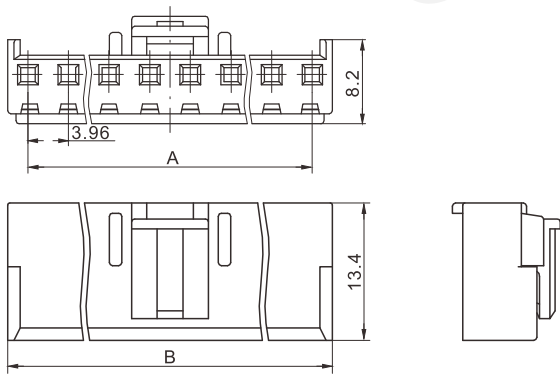

线数 Poles	型号 Type	尺寸 Dimensions(mm)		线数 Poles	型号 Type	尺寸 Dimensions(mm)	
		A	B			A	B
2	TJC3966-2Y	3.96	7.86	8	TJC3966-8Y	27.72	31.62
3	TJC3966-3Y	7.92	11.82	9	TJC3966-9Y	31.68	35.58
4	TJC3966-4Y	11.88	15.78	10	TJC3966-10Y	35.64	39.54
5	TJC3966-5Y	15.84	19.74	11	TJC3966-11Y	39.60	43.50
6	TJC3966-6Y	19.80	23.70	12	TJC3966-12Y	43.56	47.46
7	TJC3966-7Y	23.76	27.66				
材质・表面处理 Material and Finish				PA66 UL94V-0			

阳连接器 (直式) HEADER (180°)

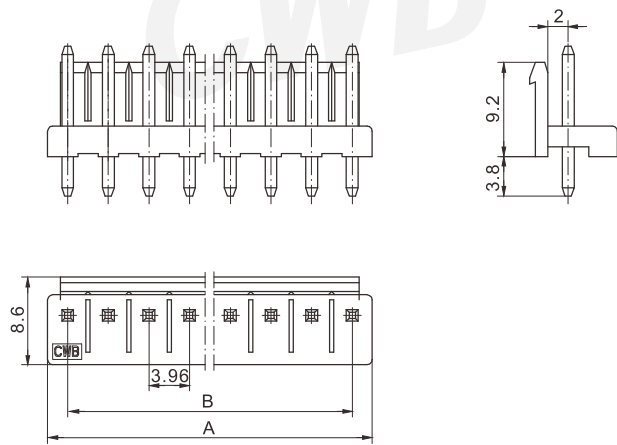

线数 Poles	型号 Type	尺寸Dimensions(mm)		线数 Poles	型号 Type	尺寸Dimensions(mm)	
	直式 (180°)	A	B		直式 (180°)	A	B
2	TJC3966-2A	7.86	3.96	8	TJC3966-8A	31.62	27.72
3	TJC3966-3A	11.82	7.92	9	TJC3966-9A	35.58	31.68
4	TJC3966-4A	15.78	11.88	10	TJC3966-10A	39.54	35.64
5	TJC3966-5A	19.74	15.84	11	TJC3966-11A	43.50	39.60
6	TJC3966-6A	23.70	19.80	12	TJC3966-12A	47.46	43.56
7	TJC3966-7A	27.66	23.76				
材质 · 表面处理 Material and Finish				PBT UL94V-0 ; 黄铜 镀锡 Brass Tin · Plated			

安装尺寸 MOUNTING MEASUREMENT

