

TJC3967 型条形连接器
TJC3967 Bar Connector


间距 (space) :3.96mm



技术参数 (SPECIFICATIONS)

适应基板厚度 (Applicable PC board thickness) : 1.2~1.6 mm
温度范围 (Temperature range) : -25℃~85℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 5A
接触电阻 (Contact resistance) : ≤0.01Ω
绝缘电阻 (Insulation resistance) : ≥1000MΩ
耐压 (Withstand voltage) : 1000V AC/minute


阳连接器 (直式) HEADER (180°)

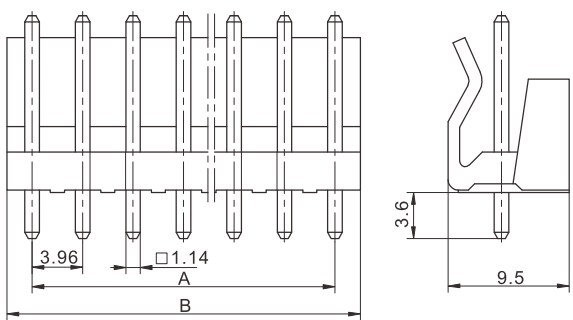

线数 Poles	型号 Type	尺寸Dimensions(mm)		线数 Poles	型号 Type	尺寸Dimensions(mm)	
	直式 (180°)	A	B		直式 (180°)	A	B
2	TJC3967-2A	3.96	7.92	8	TJC3967-7A	23.76	27.72
3	TJC3967-3A	7.92	11.88	9	TJC3967-8A	27.72	31.68
4	TJC3967-4A	11.88	15.84	10	TJC3967-9A	31.68	35.64
5	TJC3967-5A	15.84	19.8	11	TJC3967-10A	35.64	39.6
6	TJC3967-6A	19.8	23.76	12	TJC3967-11A	39.6	43.56

材质・表面处理 Material and Finish
PA66 UL94V-0; 黄铜 镀锡 Brass Tin・Plated


阳连接器 (直式定位柱) HEADER (180°)

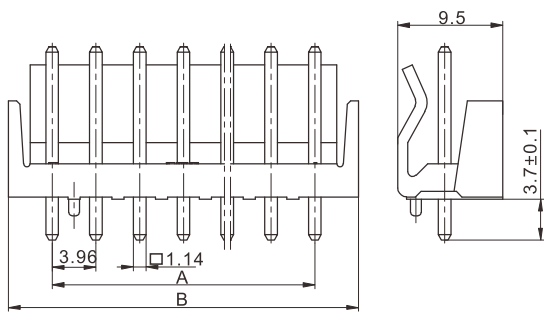


线数 Poles	型号 Type	尺寸Dimensions(mm)		线数 Poles	型号 Type	尺寸Dimensions(mm)	
	直式 (180°)	A	B		直式 (180°)	A	B
2	TJC3967-2AD	3.96	11.88	8	TJC3967-8AD	27.72	35.64
3	TJC3967-3AD	7.92	15.84	9	TJC3967-9AD	31.68	39.6
4	TJC3967-4AD	11.88	19.8	10	TJC3967-10AD	35.64	43.56
5	TJC3967-5AD	15.84	23.76	11	TJC3967-11AD	39.6	47.52
6	TJC3967-6AD	19.8	27.32	12	TJC3967-12AD	43.56	51.48
7	TJC3967-7AD	23.78	31.68	13	TJC3967-13AD	47.52	55.44

材质・表面处理 Material and Finish PA66 UL94V-0; 黄铜 镀锡 Brass Tin・Plated


安装尺寸 MOUNTING MEASUREMENT

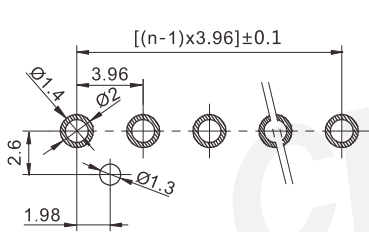


PCB Layout

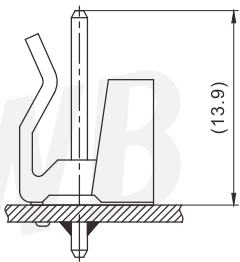

Assembly View (DIM FYI)



PCB Layout

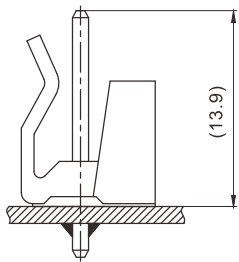

Assembly View (DIM FYI)