

TJC4 型条形连接器
TJC4 Bar Connector

间距 (space) :8-6...6mm




技术参数 (SPECIFICATIONS)

适用线规 (Applicable wires) : AWG#24~AWG#20
适应基板厚度 (Applicable PC board thickness) : 1.6mm
温度范围 (Temprature range) : -25℃~85℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 2A
接触电阻 (Contact resistance) : ≤0.01Ω
绝缘电阻 (Insulation resistance) : ≥1000MΩ
耐压 (Withstand voltage) : 1000V AC/minute


认证 (STANDARDS) :  E200881

端子 TERMINAL

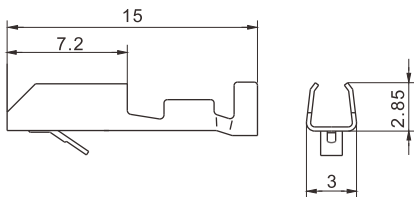

型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm ²	AWG#	
CH-TJC1	0.22~0.5	24~20	1.4~1.8
材质 · 表面处理 Material and Finish			
磷青铜 镀锡 Phos · bronze Tin · Plated			

阴连接器 HOUSING

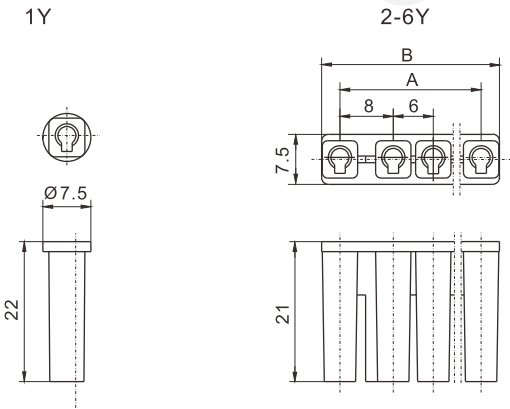


线数 Poles	型号 Type	尺寸 Dimensions(mm)	
		A	B
1	TJC4-1Y	/	/
2	TJC4-2Y	8.0	13.5
3	TJC4-3Y	14.0	19.5
4	TJC4-4Y	20.0	25.5
5	TJC4-5Y	26.0	31.5
6	TJC4-6Y	32.0	37.5
材质 · 表面处理 Material and Finish		PA66 PC/PET PPO	UL94V-2 UL94V-0 UL94V-0

TJC4 型条形连接器
TJC4 Bar Connector


间距 (space) :8-6...6mm

阳连接器 HEADER

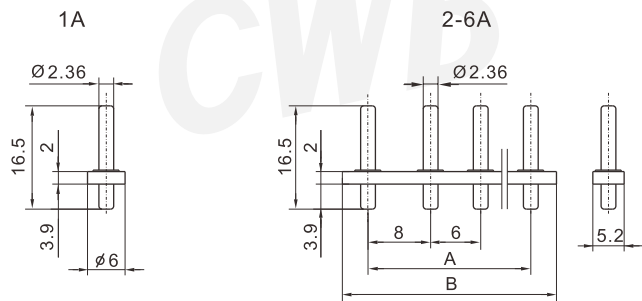


线数 Poles	型号 Type	尺寸 Dimensions(mm)	
		A	B
1	TJC4-1A	/	/
2	TJC4-2A	8.0	16.0
3	TJC4-3A	14.0	22.0
4	TJC4-4A	20.0	28.0
5	TJC4-5A	26.0	34.0
6	TJC4-6A	32.0	40.0
材质・表面处理 Material and Finish		PBT UL94V-0; 黄铜 镀锡 Brass Tin・Plated	

安装尺寸 MOUNTNG MEASUREMENT

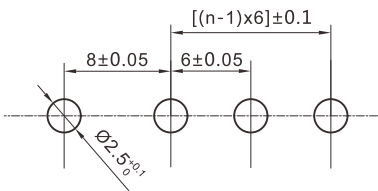

PCB Layout

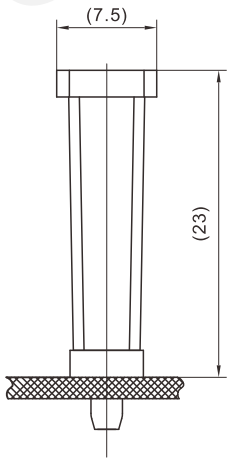

Assembly View (DIM FYI)