


TJC50014&TJC50013 型条形连接器

TJC50014&TJC50013 Bar Connector

间距 (space) :5.0mm

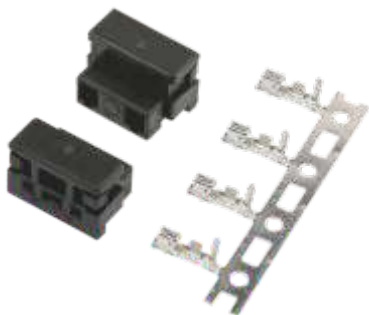


技术参数 (SPECIFICATIONS)



- 适用线规 (Applicable wires) : AWG#28~AWG#22
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 250V AC/DC
- 额定电流 (Current rating) : 3A
- 接触电阻 (Contact resistance) : $\leq 0.01\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstand voltage) : 1000V AC/minute

认证 (STANDARDS) :  E200881

端子 TERMINAL

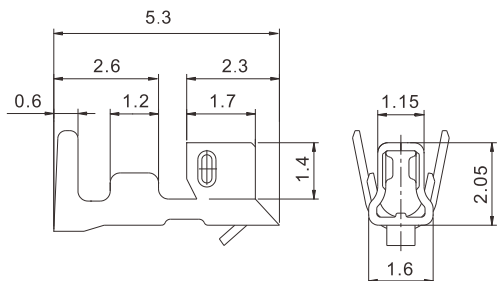

型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm ²	AWG#	
CH-TJC50013	0.08 ~ 0.33	28 ~ 22	1.2 ~ 1.6
材质 · 表面处理 Material and Finish			
磷青铜 镀锡 Phos · bronze Tin · Plated			

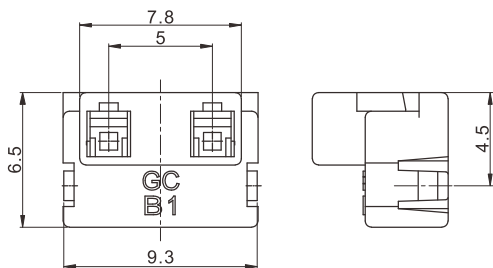

线数 Poles	型号 Type
2	TJC50014-2Y
材质 · 表面处理 Material and Finish PA66 UL94V-0	