

TJC50016 型条形连接器
TJC50016 Bar Connector


间距 (space) :5.0mm



技术参数 (Specifications)


- 适用线规 (Applicable wires) : AWG#26~ AWG#22
- 温度范围 (Temperature range) : -25℃~90℃
- 额定电压 (Voltage rating) : 150V AC/DC
- 额定电流 (Current rating) : 3A
- 接触电阻 (Contact resistance) : ≤10mΩ
- 绝缘电阻 (Insulation resistance) : ≥1000MΩ
- 耐电压 (Withstand voltage) : 1500V AC/minute

插簧 Contact

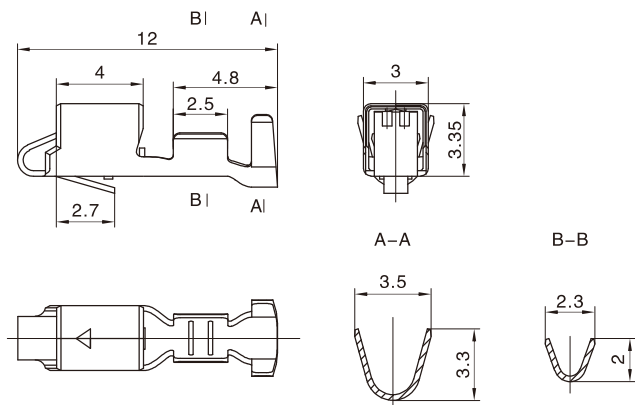

型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm ²	AWG#	
CH-TJC50016	0.13~0.33	26~22	1.3~1.6
材质·表面处理 Material and Finish			
磷青铜 镀锡 Phos·bronze Tin·Plated			

孔座 Housing

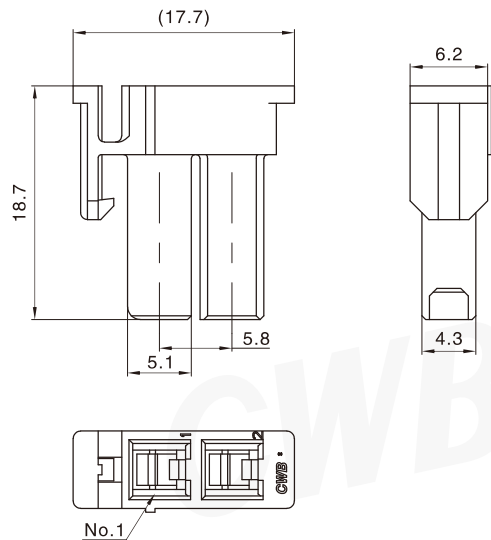


线数 Poles	型号 Type
2	TJC50016-2×1Y
材质 Material	
PA66 UL94V-0	

TJC50016 型条形连接器
TJC50016 Bar Connector

间距 (space) :5.0mm


阳连接器 (立式，直插，带定位柱) Header (V, DIP, W/Boss)

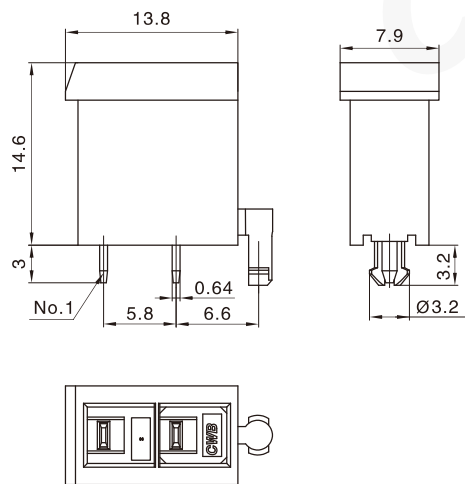

线数 Poles	型号 Type
2	TJC50016-2×1AD
材质・表面处理 Material and Finish	
PA66 UL94V-0; 黄铜 镀锡 Brass Tin・Plated	

安装尺寸 Mounting Measurement

TJC50016-2×1AD
Board thickness:1.6±0.1mm

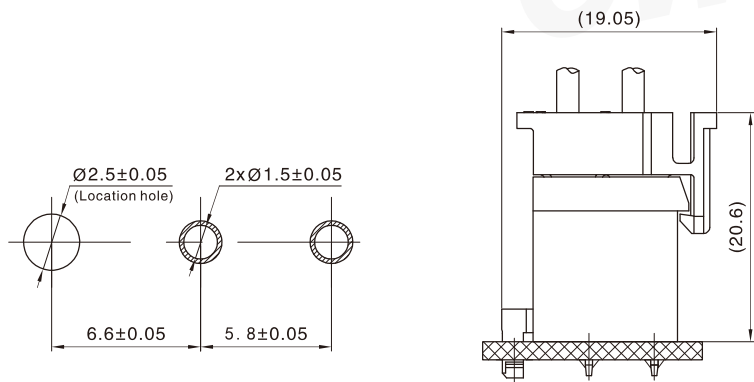

PCB Layout

Assembly View
(TJC50016-2x1Y&TJC50016-2x1AD)
(FYI)