

TJC52 型条形连接器
TJC52 Bar Connector

间距 (space) :7.62-5.08...5.08mm




技术参数 (SPECIFICATIONS)

适用线规 (Applicable wires) : AWG#28~AWG#20
适应基板厚度 (Applicable PC board thickness) : 1.2mm~1.6mm
温度范围 (Temprature range) : -25℃~85℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 3A
接触电阻 (Contact resistance) : ≤0.02Ω
绝缘电阻 (Insulation resistance) : ≥1000MΩ
耐压 (Withstand voltage) : 800V AC/minute


认证 (STANDARDS) :  US E200881

端子 TERMINAL




型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm²	AWG#	
CH-TJC52	0.08~0.22	28~24	1.2~1.4
CH-TJC52-1	0.22~0.5	24~20	1.4~1.8
材质・表面处理 Material and Finish			
磷青铜 镀锡 Phos・bronze Tin・Plated			

阴连接器 HOUSING

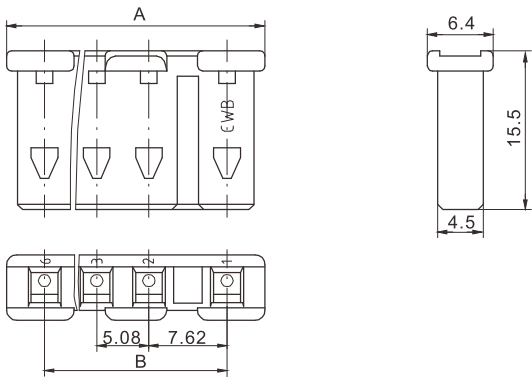


线数 Poles	型号 Type	尺寸Dimensions(mm)	
		A	B
2	TJC52-2Y	15.12	7.62
3	TJC52-3Y	20.20	12.7
4	TJC52-4Y	25.28	17.78
5	TJC52-5Y	30.36	22.86
6	TJC52-6Y	35.44	27.94
材质・表面处理 Material and Finish		PPO UL94V-0	

阳连接器 (直式) HEADER (180°)

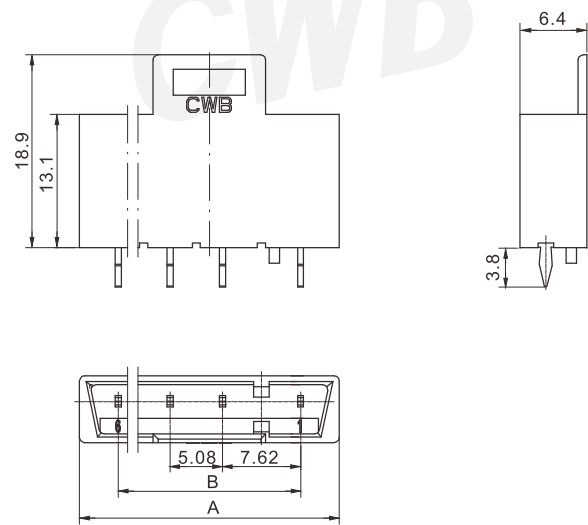


线数 Poles	型号 Type	尺寸Dimensions(mm)	
		A	B
2	TJC52-2AD	15.0	7.62
3	TJC52-3AD	20.1	12.70
4	TJC52-4AD	25.2	17.78
5	TJC52-5AD	30.3	22.86
6	TJC52-6AD	35.4	27.94
材质・表面处理 Material and Finish PA66 UL94V-0/PPO UL94V-0; 黄铜 镀锡 Brass Tin・Plated			

安装尺寸 MOUNTING MEASUREMENT

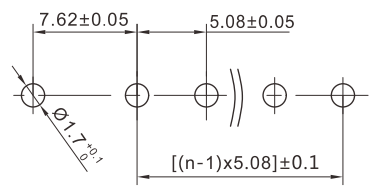

PCB Layout

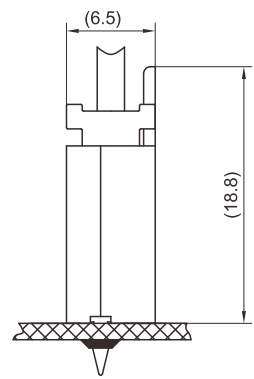

Assembly View (DIM FYI)