

间距 (space) :3.96mm



适用线规 (Applicable wires) : AWG#22~AWG#18
 适应基板厚度 (Applicable PC board thickness) : 1.2 ~ 1.6mm
 温度范围 (Temperature range) : -25℃ ~ 85℃
 额定电压 (Voltage rating) : 250V AC/DC
 额定电流 (Current rating) : 5A
 接触电阻 (Contact resistance) : $\leq 0.01 \Omega$
 绝缘电阻 (Insulation resistance) : $\geq 1000 M\Omega$
 耐压 (Withstand voltage) : 1500V AC/minute
 认证 (STANDARDS) : E200881

Technical drawing of a mechanical part, showing two views: a top view and a side view.

Top View Dimensions:

- Overall width: 5.5
- Distance from left edge to the start of the vertical slot: 2.5
- Distance from the end of the vertical slot to the right edge: 2.2
- Distance from the left edge to the start of the horizontal slot: 6.2

Side View Dimensions:

- Overall length: 13.5

型号 Type	适用导线范围Wire Range		导线外径 Wire ins.Dis
	mm ²	AWG#	
CH-TJC6	0.3~0.83	22~18	1.6~2.05
材质・表面处理Material and Finish			
磷青铜 镀锡 Phos・bronze Tin・Plated			

Technical drawing of a mechanical part, showing top and side views.

Top View:


- The part is a rectangular plate with four square holes arranged in a row.
- The distance between the centers of the first two holes is labeled **A**.
- The total width of the plate is labeled **B**.
- The width of each square hole is labeled **3.96**.
- A wavy line is shown in the center of the plate, indicating a break or a specific profile.
- A label **No.1** points to the top surface of the plate.

Side View:


- The height of the plate is labeled **16**.
- The wavy line profile is shown, indicating a break or a specific profile.

线数 Poles	型号 Type	尺寸 Dimensions (mm)		线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B			A	B
2	TJC6-2Y8.6	3.96	8.66	9	TJC6-9Y	31.68	36.52
3	TJC6-3Y	7.92	12.62	10	TJC6-10Y	35.64	40.48
4	TJC6-4Y	11.88	16.58	11	TJC6-11Y	39.60	44.44
5	TJC6-5Y	15.84	20.54	12	TJC6-12Y	43.56	48.40
6	TJC6-6Y	19.80	24.50	13			
7	TJC6-7Y	23.76	28.46	14			
8	TJC6-8Y	27.72	32.56	15			
材质・表面处理 Material and Finish PA66 UL94V-2/PA66 UL94V-0							

阳连接器 (直式) HEADER (180°)

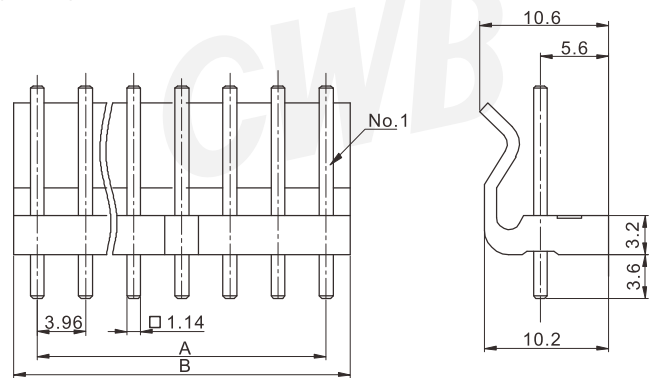

阳连接器 (弯式定位) HEADER (90°)

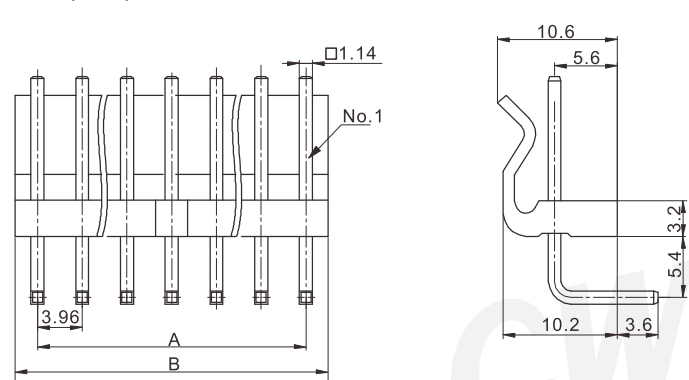

线数 Poles	型号 Type		尺寸 Dimensions (mm)		线数 Poles	型号 Type		尺寸 Dimensions (mm)	
	直式 (180°)	弯式 (90°)	A	B		直式 (180°)	弯式 (90°)	A	B
2	TJC6-2A	TJC6-2AW	3.96	7.92	9	TJC6-9A	TJC6-9AW	31.68	35.64
3	TJC6-3A	TJC6-3AW	7.92	11.88	10	TJC6-10A	TJC6-10AW	35.64	39.60
4	TJC6-4A	TJC6-4AW	11.88	15.84	11	TJC6-11A	TJC6-11AW	39.60	43.56
5	TJC6-5A	TJC6-5AW	15.84	19.80	12	TJC6-12A	TJC6-12AW	43.56	47.52
6	TJC6-6A	TJC6-6AW	19.80	23.76	13	TJC6-13A	TJC6-13AW	47.52	51.48
7	TJC6-7A	TJC6-7AW	23.76	27.72	14	TJC6-14A	TJC6-14AW	51.48	55.44
8	TJC6-8A	TJC6-8AW	27.72	31.68	15	TJC6-15A	TJC6-15AW	55.44	59.40
材质 · 表面处理 Material and Finish					PA66 UL94V-2 /PA66 UL94V-0; 黄铜 镀锡 Brass Tin · Plated				

安装尺寸 MOUNTING MEASUREMENT

