

TJC79202 型条形连接器
TJC79202 Bar Connector


间距 (space) :7.92mm



技术参数 (SPECIFICATIONS)


- 适用线规 (Applicable wires) : AWG#20~AWG#16
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 250V AC/DC
- 额定电流 (Current rating) : 7.5A
- 接触电阻 (Contact resistance) : ≤0.02Ω
- 绝缘电阻 (Insulation resistance) : ≥1000MΩ
- 耐压 (Withstand voltage) : 1500V AC/minute

端子 TERMINAL

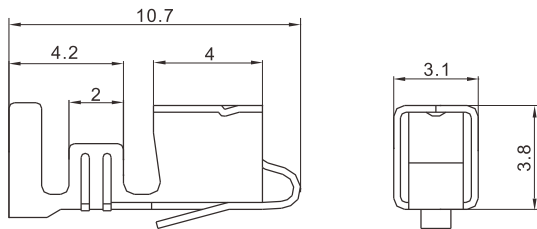


型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm²	AWG#	
CH-VH	0.5~1.3	20~16	1.8 ~ 2.35
材质・表面处理 Material and Finish			
磷青铜 镀锡 Phos・bronze Tin・Plated			

阴连接器 RECEPTACLE HOUSING

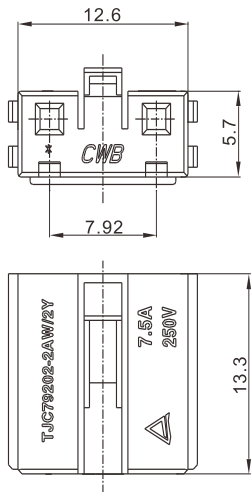

线数 Poles	型号 Type
2	TJC79202-2Y
材质・表面处理 Material and Finish PA66 UL94V-0	

阳连接器 HEADER

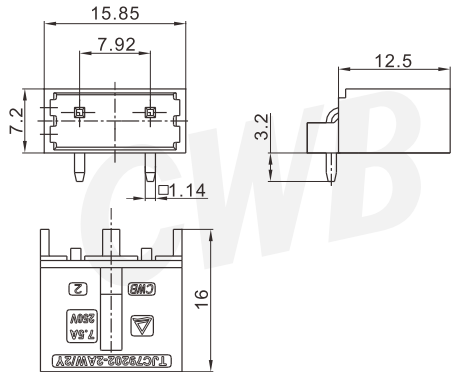


线数 Poles	型号 Type
2	TJC79202-2AW
材质・表面处理 Material and Finish PA66 UL94V-0 黄铜 镀锡 Brass Tin・Plated	


TJC79202 型条形连接器
TJC79202 Bar Connector

间距 (space) :7.92mm

安装尺寸 MOUNTING MEASUREMENT



PCB Layout



Assembly View (DIM FYI)