


技术参数 (Specifications)

适用线规 (Applicable wires) : AWG#28~AWG#22
适应基板厚度 (Applicable PC board thickness) : 1.6mm
温度范围 (Temprature range) : -25℃~85℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 3A
接触电阻 (Contact resistance) : ≤10mΩ
绝缘电阻 (Insulation resistance) : ≥1000MΩ
耐压 (Withstand voltage) : 1000V AC/minute


认证 (Standards) :  E200881

插簧 Contact




型号 Type	适用导线范围Wire Range		导线外径 Wire ins.Dis
	mm²	AWG#	
CH-TJC8	0.08 ~ 0.33	28 ~ 22	1.2 ~ 1.6
材质・表面处理 Material and Finish			
磷青铜 镀锡 Phos・bronze Tin・Plated			

孔座 Housing

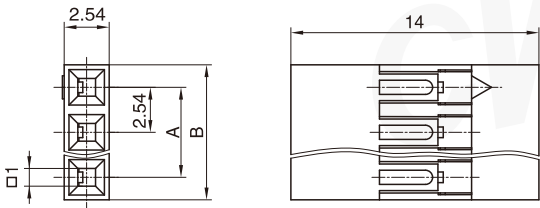


线数 Poles	型号 Type	尺寸Dimensions(mm)		线数 Poles	型号 Type	尺寸Dimensions(mm)	
		A	B			A	B
2	TJC8-2Y	2.54	5.08	8	TJC8-8Y	17.78	20.32
3	TJC8-3Y	5.08	7.62	9	TJC8-9Y	20.32	22.86
4	TJC8-4Y	7.62	10.16	10	TJC8-10Y	22.86	25.40
5	TJC8-5Y	10.16	12.70	11	TJC8-11Y	25.40	27.94
6	TJC8-6Y	12.70	15.24	12	TJC8-12Y	27.94	30.48
7	TJC8-7Y	15.24	17.78				
材质 Material				PPO UL94V-0			

阳连接器 (立式，直插) Header (V, DIP)

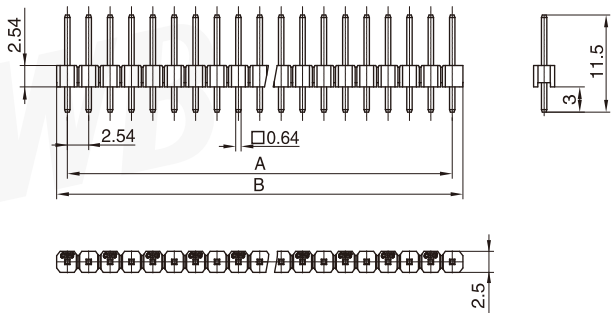

间距 (space) :2.54mm


阳连接器 (立式, 直插) Header (V, DIP)

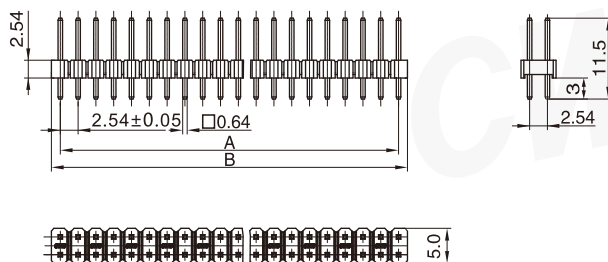


线数 Poles	型号 Type	尺寸Dimensions(mm)		线数 Poles	型号 Type	尺寸Dimensions(mm)	
		A	B			A	B
4	TJC8-2X2A	2.54	5.08	24	TJC8-2X12A	27.94	30.48
6	TJC8-2X3A	5.08	7.62	26	TJC8-2X13A	30.48	33.02
8	TJC8-2X4A	7.62	10.18	28	TJC8-2X14A	33.02	35.56
10	TJC8-2X5A	10.16	12.7	30	TJC8-2X15A	35.56	38.1
12	TJC8-2X6A	12.7	15.24	32	TJC8-2X16A	38.1	40.64
14	TJC8-2X7A	15.24	17.784	34	TJC8-2X17A	40.64	43.18
16	TJC8-2X8A	17.78	20.324	36	TJC8-2X18A	43.18	45.72
19	TJC8-2X9A	20.32	22.864	38	TJC8-2X19A	45.72	48.26
20	TJC8-2X10A	22.86	25.404	40	TJC8-2X20A	48.26	50.8
22	TJC8-2X11A	25.4	27.944				
材质・表面处理 Material and Finish							
PBT/PA UL94V-0・黄铜 镀锡 Brass Tin・Plated 黄铜 镀金 Brass Gold・Plated							

安装尺寸 Mounting Measurement

TJC8-nA




PCB Layout




Assembly View (DIM FYI)

TJC8-2xnA



PCB Layout



Assembly View (DIM FYI)