
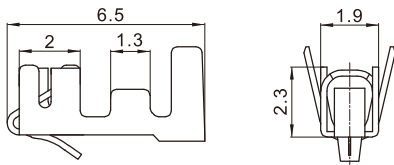


技术参数 (Specifications)

适用线规 (Applicable wires) : AWG#28~AWG#22
 适应基板厚度 (Applicable PC board thickness) : 1.6mm
 温度范围 (Temperature range) : -25℃~85℃
 额定电压 (Voltage rating) : 250V AC/DC
 额定电流 (Current rating) : 3A
 接触电阻 (Contact resistance) : ≤10mΩ
 绝缘电阻 (Insulation resistance) : ≥1000MΩ
 耐压 (Withstand voltage) : 1000V AC/minute


认证 (Standards) :  E200881

插簧 Contact




型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis	备注 Remark
	mm ²	AWG#		
CH-TJC3	0.22 ~ 0.33	24 ~ 22	1.4 ~ 1.6	料带宽度3.0mm
CH-TJC3B	0.22 ~ 0.33	24 ~ 22	1.4 ~ 1.6	料带宽度2.5mm
CH-TJC3-1	0.13	26	1.3	料带宽度3.0mm
CH-TJC3-2	0.08	28	1.2	料带宽度3.0mm
材质·表面处理 Material and Finish				
磷青铜 镀锡 Phos·bronze Tin·Plated				

孔座 Housing

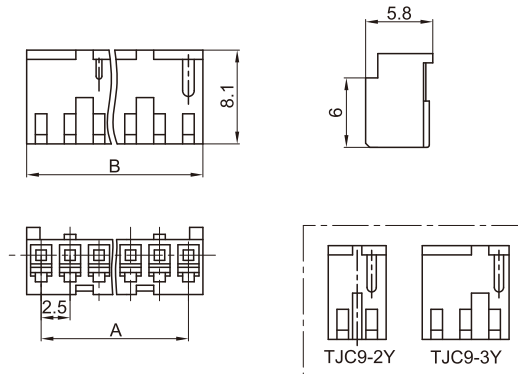


线数 Poles	型号 Type	尺寸Dimensions(mm)		线数 Poles	型号 Type	尺寸Dimensions(mm)	
		A	B			A	B
2	TJC9-2Y	2.5	5.0	9	TJC9-9Y	20.0	22.5
3	TJC9-3Y	5.0	7.5	10	TJC9-10Y	22.5	25.0
4	TJC9-4Y	7.5	10.0	11	TJC9-11Y	25.0	27.5
5	TJC9-5Y	10.0	12.5	12	TJC9-12Y	27.5	30.0
6	TJC9-6Y	12.5	15.0	13	TJC9-13Y	30.0	32.5
7	TJC9-7Y	15.0	17.5	14	TJC9-14Y	32.5	35.0
8	TJC9-8Y	17.5	20.0	15	TJC9-15Y	35.0	37.5
材质 Material		PA66 UL94V-0					

阳连接器 (立式, 直插) Header (V, DIP)

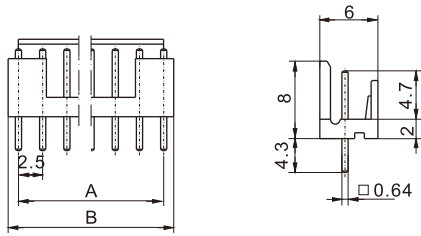


线数 Poles	型号 Type	尺寸Dimensions(mm)	
		A	B
2	TJC9-2A	2.5	5.0
3	TJC9-3A	5.0	7.5
4	TJC9-4A	7.5	10.0
5	TJC9-5A	10.0	12.5
6	TJC9-6A	12.5	15.0
7	TJC9-7A	15.0	17.5
8	TJC9-8A	17.5	20.0
9	TJC9-9A	20.0	22.5
10	TJC9-10A	22.5	25.0
11	TJC9-11A	25.0	27.5
12	TJC9-12A	27.5	30.0
13	TJC9-13A	30.0	32.5
14	TJC9-14A	32.5	35.0
15	TJC9-15A	35.0	37.5
材质 · 表面处理 Material and Finish			
PA66 UL94V-0; 黄铜 镀锡 Brass Tin · Plated			

安装尺寸 Mounting Measurement



PCB Layout

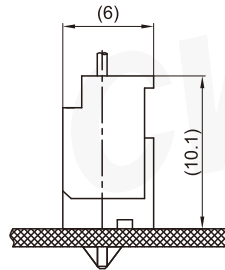

Assembly View (DIM FYI)

CWB