



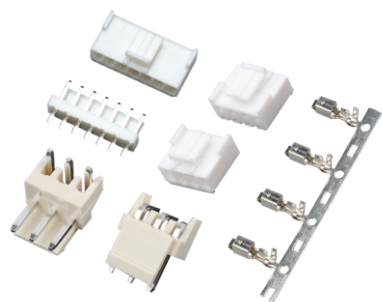


技术参数 (Specifications)
适用线规 (Applicable wires) : AWG#24~AWG#16
温度范围 (Temperature range) : -40℃~105℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 8A
接触电阻 (Contact resistance) : ≤10mΩ
耐电压 (Withstand voltage) : 2000V AC/minute

插簧 Contact

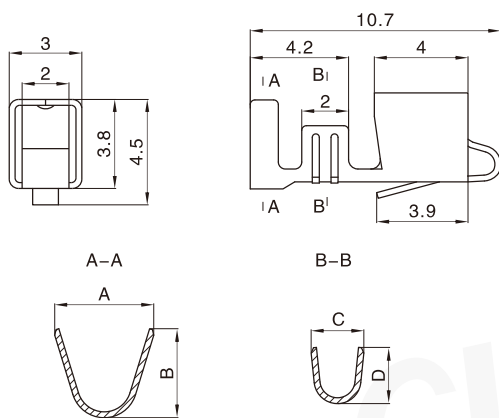


型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis	尺寸 Dimensions (mm)			
	mm ²	AWG#		A	B	C	D
CH-VH	0.52 ~ 0.82	20 ~ 18	17.5 ~ 2.85	4	3.8	2.6	2.3
CH-VH-1	0.82 ~ 1.31	18 ~ 16	2.0 ~ 2.85	4	4.25	2.85	2.95
CH-VHB	0.52 ~ 0.82	20 ~ 18	17.5 ~ 2.85	4	3.8	2.7	2.2
CH-VH-3	0.75	18	2.0 ~ 2.85	4.2	4.1	2.7	2.4
CH-VH-4	0.2 ~ 0.33	24 ~ 22	1.4 ~ 2.40	4	3.8	2.05	1.45
材质・表面处理 Material and Finish							
磷青铜 镀锡 Phos・bronze Tin・Plated							

孔座 Housing

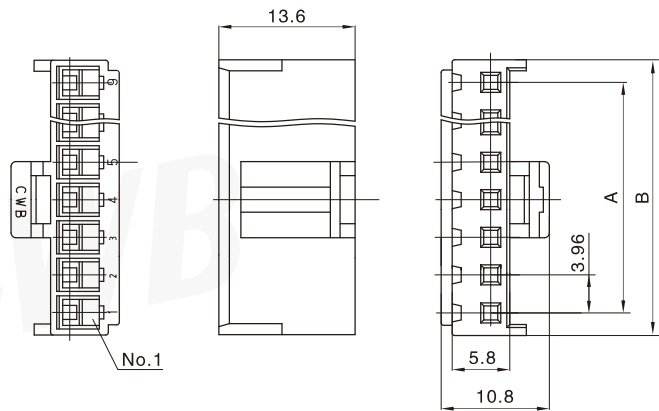

线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
2	VH-2Y	3.96	8.47
3	VH-3Y	7.92	12.43
4	VH-4Y	11.88	16.39
5	VH-5Y	15.84	20.35
6	VH-6Y	19.80	24.31
7	VH-7Y	23.76	28.27
8	VH-8Y	27.72	32.23
9	VH-9Y	31.68	36.19
10	VH-10Y	35.64	40.15
11	VH-11Y	39.60	44.11
12	VH-12Y	43.56	48.07
13	VH-13Y	47.52	52.03
15	VH-15Y	55.44	59.95
材质 Material			
PA66 UL94V-0/PA66 UL94V-0 GWT750℃			


孔座 (含锁紧片保持结构) Housing (W/Retainer)

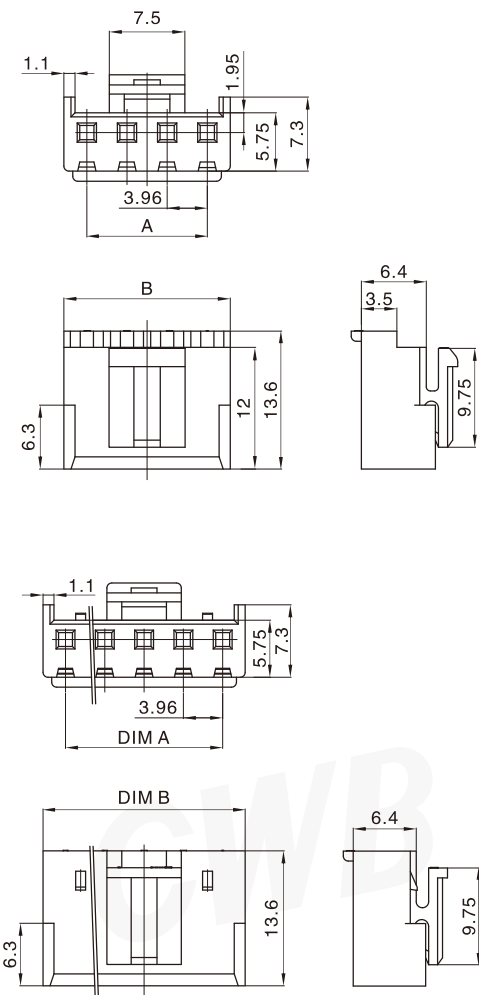


线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
2	VHB-2Y	/	8.5
3	VHB-3Y	7.92	12.45
4	VHB-4Y	11.88	16.41
材质 Material			
PA66 UL94V-0 GWT750℃			

线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
5	VHB-5Y	15.84	20.37
6	VHB-6Y	19.8	24.33
7	VHB-7Y	23.76	28.29
8	VHB-8Y	27.72	32.25
8	VHB-9Y	31.68	36.21
材质 Material			
PA66 UL94V-0 GWT750℃			

孔座 (含锁紧片保持结构) Housing (W/Retainer)

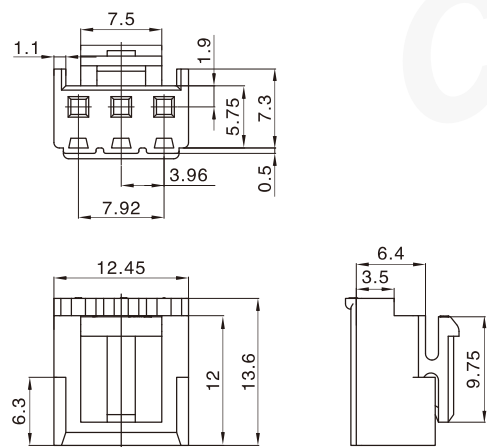


线数 Poles	型号 Type
3	VHB-3Y-1
材质 Material	
PA66 UL94V-0 GWT750℃	

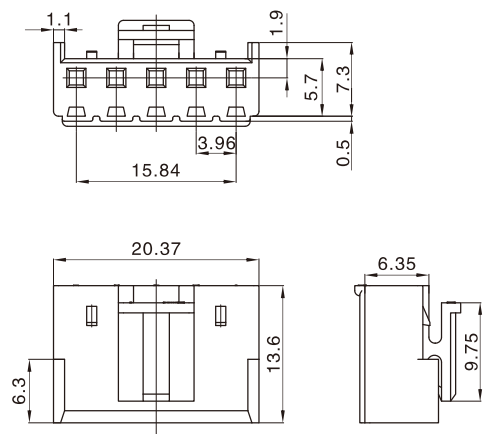

线数 Poles	型号 Type
5	VHB-5Y-1
材质 Material	
PA66 UL94V-0 GWT750℃	


锁紧片 Retainer

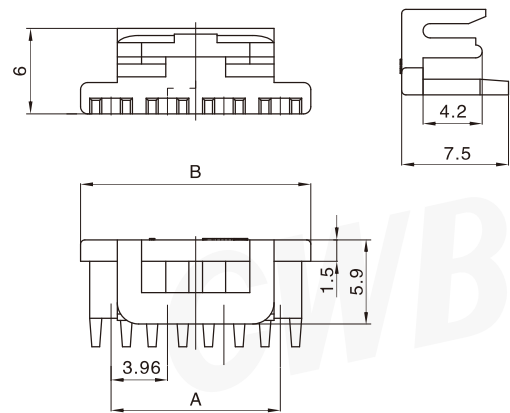

线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
2	VHB-2YS	/	8.3
3	VHB-3YS	7.92	12.2
4	VHB-4YS	11.88	16.2
材质 Material			
PA66 UL94V-0 GWT750℃			


VH 型条形连接器
VH Bar Connector

间距 (space) :3.96mm

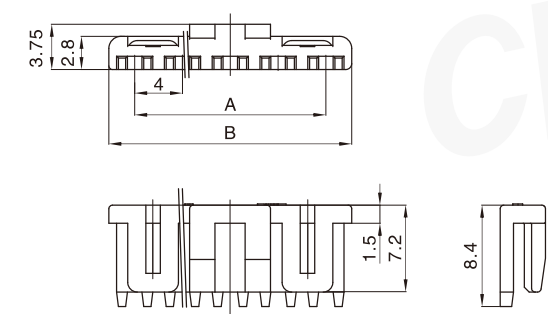


线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
5	VHB-5YS	15.84	20.12
6	VHB-6YS	19.8	24.08
7	VHB-7YS	23.76	28.04
8	VHB-8YS	27.72	32.00
9	VHB-9YS	31.68	35.96
材质 Material			
PA66 UL94V-0 GWT750℃			

阳连接器 (立式、直插) Header (V、DIP)

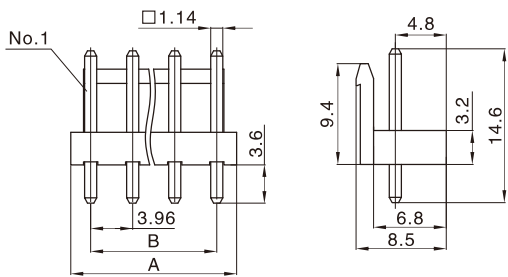


线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
2	VH-2A	7.92	3.96
3	VH-3A	11.88	7.92
4	VH-4A	15.84	11.88
5	VH-5A	19.80	15.84
6	VH-6A	23.76	19.80
7	VH-7A	27.72	23.76
8	VH-8A	31.68	27.72
9	VH-9A	35.64	31.68
10	VH-10A	39.60	35.64
11	VH-11A	43.56	39.60
12	VH-12A	47.52	43.56
材质・表面处理 Material and Finish			
PA66 UL94V-0; 黄铜 镀锡 Brass Tin・Plated			

阳连接器 (立式、直插) Header (V、DIP)

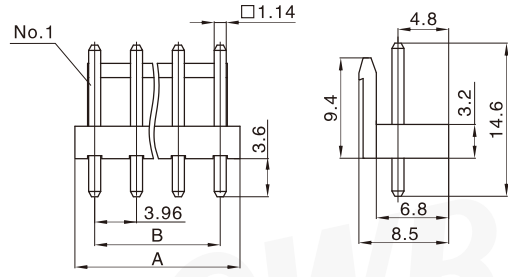


线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
2	VH-2A-X	7.92	3.96
3	VH-3A-X	11.88	7.92
4	VH-4A-X	15.84	11.88
5	VH-5A-X	19.80	15.84
6	VH-6A-X	23.76	19.80
7	VH-7A-X	27.72	23.76
8	VH-8A-X	31.68	27.72
9	VH-9A-X	35.64	31.68
10	VH-10A-X	39.60	35.64
11	VH-11A-X	43.56	39.60
12	VH-12A-X	47.52	43.56
13	VH-13A-X	51.48	51.48
材质・表面处理 Material and Finish			
PA66 UL94V-0/ PA66 UL94V-0 GWT750℃; 黄铜 镀锡 Brass Tin・Plated			

阳连接器 (卧式、直插) Header (H、DIP)

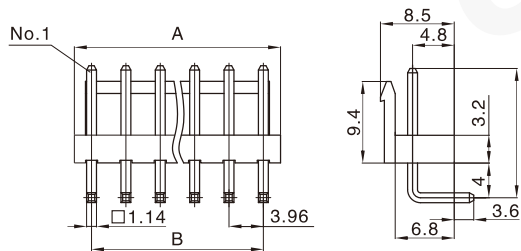


线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
2	VH-2AW-X	7.92	3.96
3	VH-3AW-X	11.88	7.92
4	VH-4AW-X	15.84	11.88
5	VH-5AW-X	19.80	15.84
6	VH-6AW-X	23.76	19.80
7	VH-7AW-X	27.72	23.76
8	VH-8AW-X	31.68	27.72
9	VH-9AW-X	35.64	31.68
10	VH-10AW-X	39.60	35.64
11	VH-11AW-X	43.56	39.60
12	VH-12AW-X	47.52	43.56
材质・表面处理 Material and Finish			
PA66 UL94V-0/ PA66 UL94V-0 GWT750℃; 黄铜 镀锡 Brass Tin・Plated			

阳连接器 (立式、直插、含定位柱) Header (V、DIP、W/Boss)

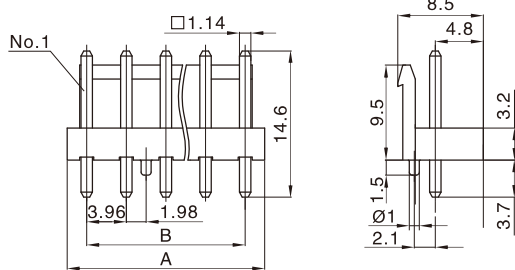

线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
2	VH-2AD	7.92	3.96
3	VH-3AD	11.88	7.92
4	VH-4AD	15.84	11.88
5	VH-5AD	19.80	15.84
6	VH-6AD	23.76	19.80
7	VH-7AD	27.72	23.76
8	VH-8AD	31.68	27.72
9	VH-9AD	35.64	31.68
材质・表面处理 Material and Finish			
PA66 UL94V-0 GWT750℃; 黄铜 镀锡 Brass Tin・Plated			

阳连接器 (卧式、直插、含挡板) Header (H、DIP、W/PCB stabilizer)

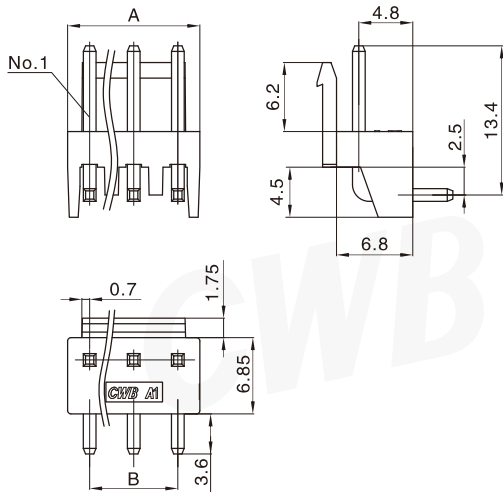


线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
2	VH-2AWJ	7.92	3.96
3	VH-3AWJ	11.88	7.92
4	VH-4AWJ	15.84	11.88
5	VH-5AWJ	19.80	15.84
6	VH-6AWJ	23.76	19.80
材质・表面处理 Material and Finish			
PA66 UL94V-0 GWT750℃; 黄铜 镀锡 Brass Tin・Plated			

VH 型条形连接器
VH Bar Connector

间距 (space) :3.96mm


阳连接器 (立式、直插、含定位柱) Header (V、DIP、W/Boss)

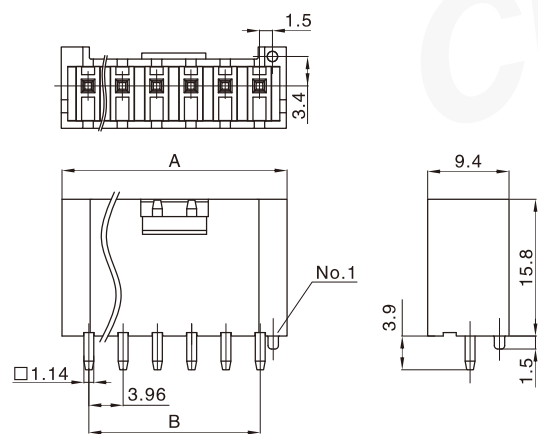


线数 Poles	型号 Type	尺寸 Dimensions (mm)	
		A	B
2	VHB-2ADG	10.16	3.96
3	VHB-3ADG	14.12	7.92
4	VHB-4ADG	10.08	11.88
5	VHB-5ADG	22.04	15.84
6	VHB-6ADG	26.00	19.80
7	VHB-7ADG	29.96	23.76
8	VHB-8ADG	33.92	33.45
材质・表面处理 Material and Finish			
PA66 UL94V-0 GWT750℃; 黄铜 镀锡 Brass Tin・Plated			

安装尺寸 Mounting Measurement

VH-nA

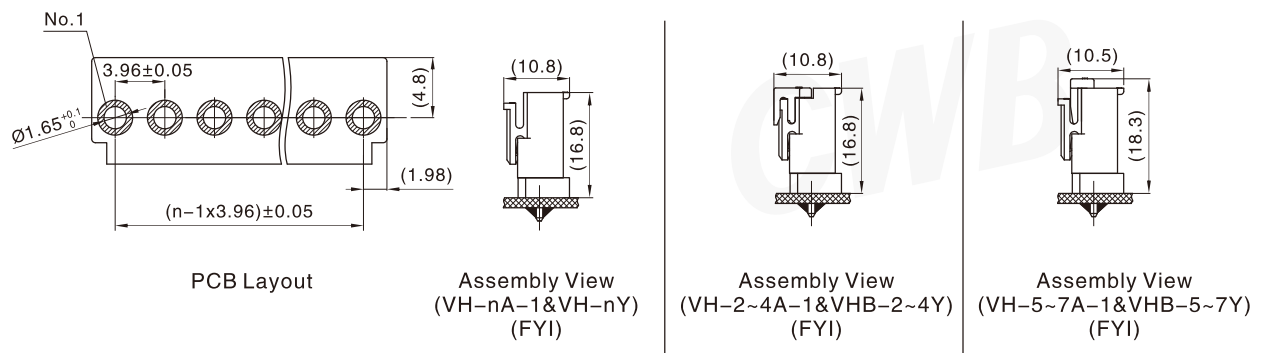


VH-nA-X

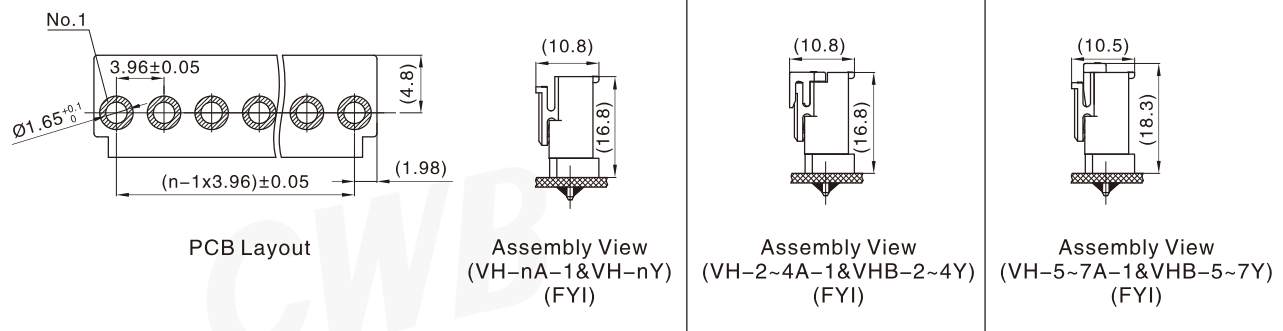


VH 型条形连接器
VH Bar Connector

间距 (space) :3.96mm


VH-nAW-X

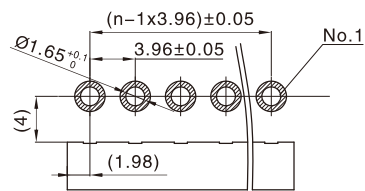


PCB Layout



Assembly View
(VH-nAW-X&VH-nY)
(FYI)




Assembly View
(VH-2~4AW-X&VHB-2~4Y)
(FYI)




Assembly View
(VH-5~7AW&VHB-5~7Y)
(FYI)


VH-nAD

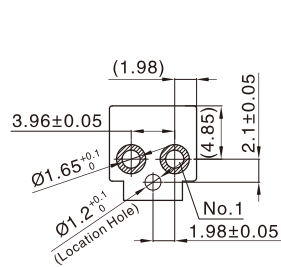

VH-2AD
PCB Layout

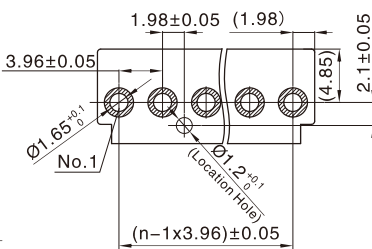


VH-3AD~9AD
PCB Layout



Assembly View
(VH-nAD&VH-nY)
(FYI)




Assembly View
(VH-nAD&VHB-2~4Y)
(FYI)




Assembly View
(VH-nAD&VHB-5~7Y)
(FYI)


VH-nAWJ




PCB Layout



Assembly View
(VH-nAW&VH-nY)
(FYI)




Assembly View
(VH-nAD&VHB-2~4Y)
(FYI)




Assembly View
(VH-nAD&VHB-5~7Y)
(FYI)


VH-nADG

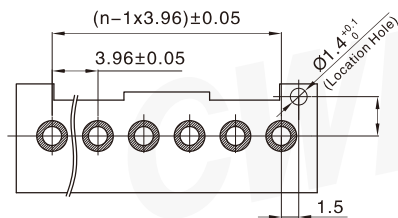


PCB Layout



Assembly View
(VH-nAWJ&VH-nY)
(FYI)



Assembly View
(VH-nAD&VHB-2~4Y)
(FYI)



Assembly View
(VH-nAD&VHB-5~7Y)
(FYI)