

# WB25B 型条形连接器

## WB25B Bar Connector


间距 ( space ) :2.5mm



### 技术参数 ( SPECIFICATIONS )


- 适应基板厚度 ( Applicable PC Board thickness ) : 1.2~1.6 mm
- 温度范围 ( Temperature range ) : -25°C~85°C
- 额定电压 ( Voltage rating ) : 250V AC/DC
- 额定电流 ( Current rating ) : 3A
- 绝缘电阻 ( Insulation resistance ) :  $\geq 1000M\Omega$
- 耐压 ( Withstand voltage ) : 1000V AC/minute

### 阳连接器 HEADER

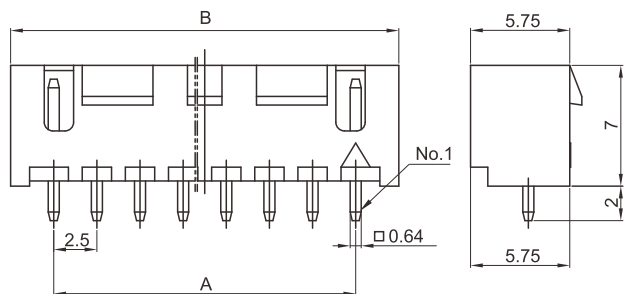

线数 Poles	型号Type	颜色Color	尺寸Dimensions ( mm )	
			A	B
2	WB25B-002-137	Black	2.5	7.5
	WB25B-002-138	Blue		
	WB25B-002-139	Red		
3	WB25B-003-132	Natural	5.0	10.0
	WB25B-003-139	Red		
4	WB25B-004-130	Yellow	7.5	12.5
	WB25B-004-132	Natural		
	WB25B-004-138	Blue		
	WB25B-004-139	Red		
5	WB25B-005-132	Natural	10.0	15.0
	WB25B-005-137	Black		
	WB25B-005-138	Blue		
6	WB25B-006-132	Natural	12.5	17.5
	WB25B-006-138	Blue		
7	WB25B-007-132	Natural	15.0	20.0
	WB25B-007-137	Black		
8	WB25B-008-132	Natural	17.5	22.5
	WB25B-008-138	Blue		
9	WB25B-009-132	Natural	20.0	25.0
10	WB25B-010-130	Yellow	22.5	27.5
12	WB25B-012-132	Natural	27.5	32.5
材质·表面处理 Material and Finish PA UL94V-0 ; 黄铜 镀锡 Brass Tin Plated				

### 安装尺寸 MOUNTING MEASUREMENT

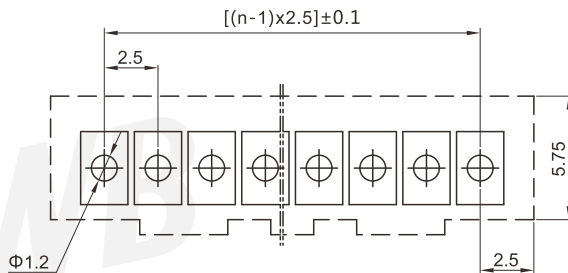

PCB Layout