

TJC46 系列 洗衣机系列连接器

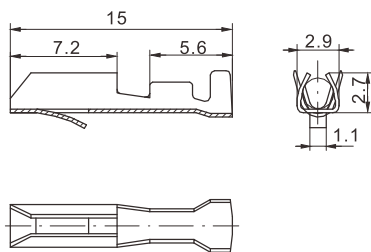
TJC46 Series Washing Machine Series Connector



技术参数 (SPECIFICATIONS)


适用线规 (Applicable wires) : AWG#24~AWG#20
 温度范围 (Temperature range) : -25℃~85℃
 额定电压 (Voltage rating) : 250V AC/DC
 额定电流 (Current rating) : 5A
 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
 耐压 (Withstand voltage) : 2200V AC/minute
 灼热丝测试 (Glow-wire test) : 850℃ ;750℃ no flame
 材料(Material):
 Housing:PC/PET UL94V-0
 Wafer:PC/PET UL94V-0;Brass Tin-plated

端子 TERMINAL




型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm ²	AWG#	
CH-TJC41	0.22~0.5	24 ~ 20	1.4~1.8
材质 · 表面处理 Material and Finish			
磷青铜 Phos · bronze Tin · Plated			

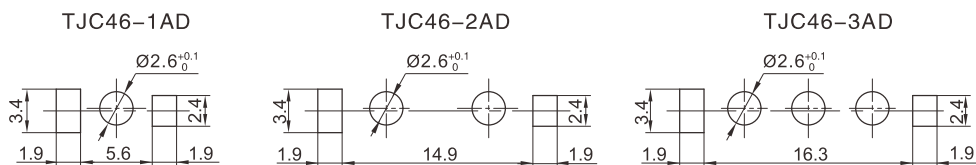安装尺寸 MOUNTING MEASUREMENT









PCB Layout

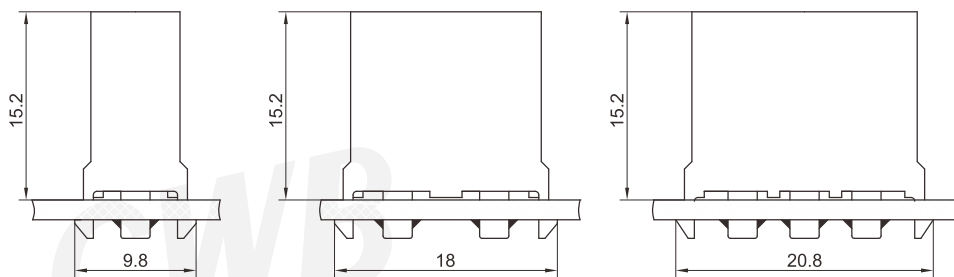

Assembly View (DIM FYI)

TJC46 系列 洗衣机系列连接器

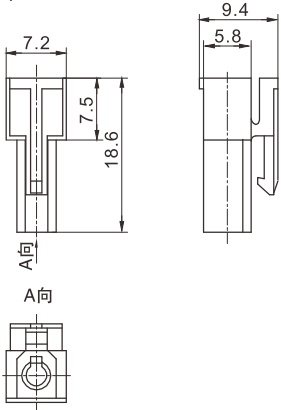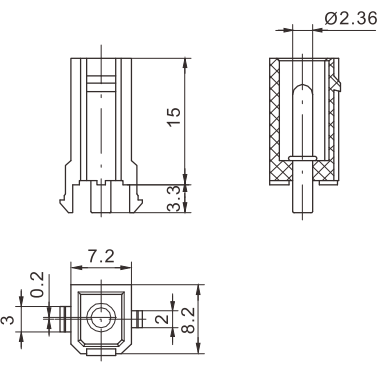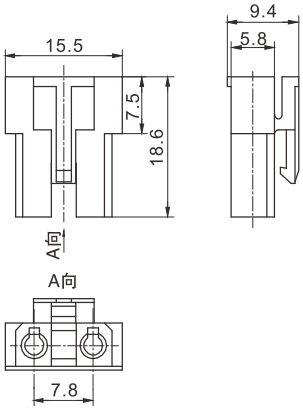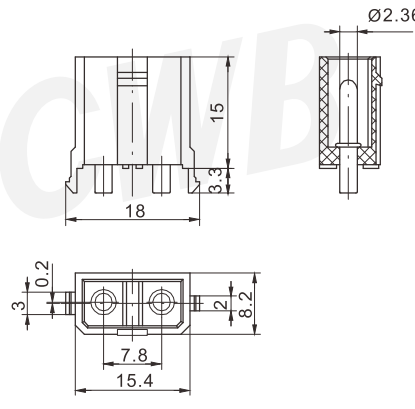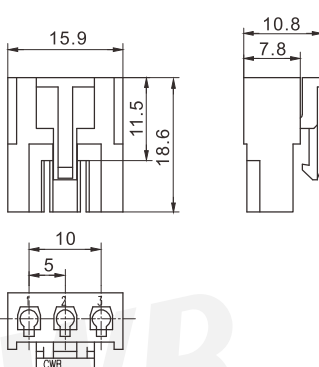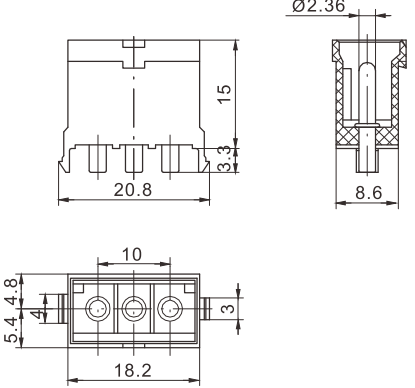TJC46 Series Washing Machine Series Connector

线数 Poles	阴连接器 HOUSING	阳连接器 WAFER
1	<p>TJC46-1Y</p> 	<p>TJC46-1AD</p> 
2	<p>TJC46-2Y</p> 	<p>TJC46-2AD</p> 
3	<p>TJC46-3Y</p> 	<p>TJC46-3AD</p> 
材质 · 表面处理 Material and Finish		PC/PET UL94V-0; 黄铜 镀锡 Brass Tin · Plated